TOSHIBA

SERVICE MANUAL

COLOUR TELEVISION

C7SS Chassis

2876DD, 2876DF

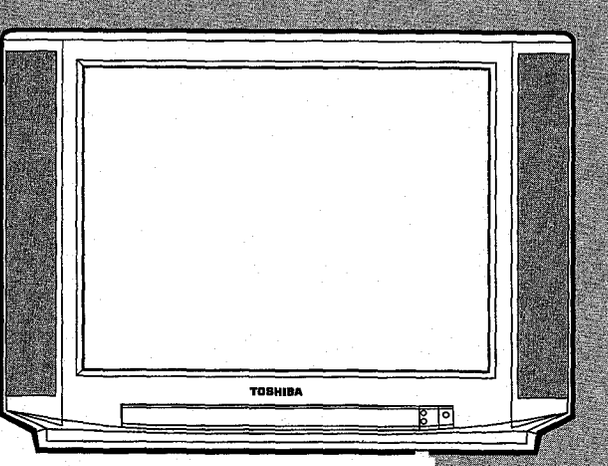

Jun., 1997 (So)

TABLE OF CONTENTS

CHAPTER 1 GENERAL ADJUSTMENTS

SAFETY INSTRUCTIONS 3
SET-UP ADJUSTMENT 4
SERVICE MODE 6
DESIGN MODE 9
ELECTRICAL ADJUSTMENTS 10
CIRCUIT CHECK 15

CHAPTER 2 SPECIFIC INFORMATIONS

SETTING & ADJUSTING DATA 16
LOCATION OF CONTROLS (TV SET) 18
LOCATION OF CONTROLS (REMOTE CONTROL) 19
SERVICE POSITION 20
CIRCUIT BLOCK DIAGRAM 21
CABINET REPLACEMENT PARTS LIST 22
CHASSIS REPLACEMENT PARTS LIST 23
PC BOARDS BOTTOM VIEW 37
TERMINAL VIEW OF TRANSISTORS 45
SPECIFICATIONS 49
APPENDIX:
CIRCUIT DIAGRAM

CHAPTER 1 GENERAL ADJUSTMENTS

SAFETY INSTRUCTIONS

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRECAUTION" AND "PRODUCT SAFETY NOTICE" INSTRUCTIONS BELOW.

X-RAY RADIATION PRECAUTION

1. Excessive high voltage can produce potentially hazardous X-RAY RADIATION. To avoid such hazards, the high voltage must not be above the specified limit. The nominal value of the high voltage of this receiver is Ⓐ kV at zero beam current (minimum brightness) under a Ⓒ V AC power source. The high voltage must not, under any circumstances, exceed Ⓑ kV.

   Refer to table-1 for high voltage Ⓐ, Ⓑ & AC voltage Ⓒ. (See SETTING & ADJUSTING DATA on page 16)

   Each time a receiver requires servicing, the high voltage should be checked following the HIGH VOLTAGE CHECK procedure in this manual. It is recommended that the reading of the high voltage be recorded as a part of the service record. It is important to use an accurate and reliable high voltage meter.
2. The only source of X-RAY RADIATION in this TV receiver is the picture tube. For continued X-RAY RADIATION protection, the replacement tube must be exactly the same type tube as specified in the parts list.
3. Some part in this receiver have special safety-related characteristics for X-RAY RADIATION protection. For continued safety, parts replacement should be undertaken only after referring to the PRODUCT SAFETY NOTICE below.

SAFETY PRECAUTION

WARNING : Service should not be attempted by anyone unfamiliar with the necessary precautions on this receiver. The following are the necessary precautions to be observed before servicing this chassis.

1. An isolation transformer should be connected in the power line between the receiver and the AC line before any service is performed on the receiver.
2. Always discharge the picture tube anode to the CRT conductive coating before handling the picture tube. The picture tube is highly evacuated and if broken, glass fragments will be violently expelled. Use shatter proof goggles and keep picture tube away from the unprotected body while handling.
3. When replacing a chassis in the cabinet, always be certain that all the protective devices are put back in place, such as; nonmetallic control knobs, insulating covers, shields, isolation resistor-capacitor network etc.

PRODUCT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These characteristics are often passed unnoticed by a visual inspection and the protection afforded by them cannot necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in this manual and its supplements; electrical components having such features are identified by the international hazard symbols on the schematic diagram and the parts list.
Before replacing any of these components, read the parts list in this manual carefully. The use of substitute replacement parts which do not have the same safety characteristics as specified in the parts list may create shock, fire, X-ray radiation or other hazards.

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRECAUTION" AND "PRODUCT SAFETY NOTICE" ON PAGE 3 OF THIS MANUAL.

SET-UP ADJUSTMENT

■ The following adjustments should be made when a complete realignment is required or a new picture tube is installed. Perform the adjustments in order as follows :

1. Color Purity
2. Convergence
3. White Balance

Note: The PURITY/CONVERGENCE MAGNET assembly and rubber wedges need mechanical positioning. Refer to figure 1.

* There are no adjustment of purity and convergence in some picture tube (Unified with purity magnet)

COLOR PURITY ADJUSTMENT

NOTE : Before attempting any purity adjustments, the receiver should be operated for at least fifteen minutes.

1. Demagnetize the picture tube and cabinet using a degaussing coil.
2. Set the brightness and contrast to maximum.
3. Use a green raster from among the built-in test signals.
4. Loosen the clamp screw holding the yoke and slide the yoke backward or forward to provide vertical green belt (zone) in the picture screen.
5. Remove the Rubber Wedges.
6. Rotate and spread the tabs of the purity magnet (See figure 2.) around the neck of the picture tube until the green belt is in the center of the screen. At the same time, enter the raster vertically.
7. Slowly move the yoke forward or backward until a uniform green screen is obtained. Tighten the clamp screw of the yoke temporarily.
8. Check the purity of the red and blue raster.

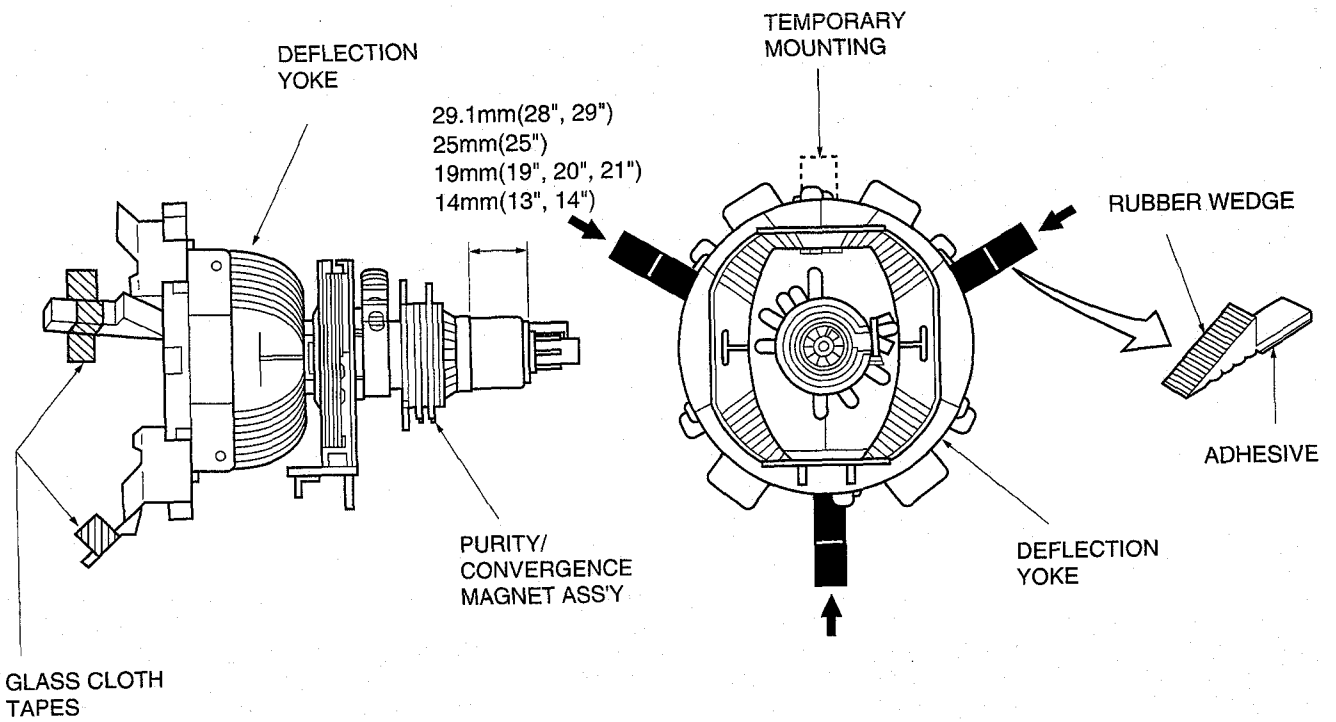

Figure 1.

CONVERGENCE ADJUSTMENTS

NOTE: Before attempting any convergence adjustments, the receiver should be operated for at least fifteen minutes.

■ CENTER CONVERGENCE ADJUSTMENT

1. Use the cross-dot pattern from among the built-in test signals.
2. Set the brightness and contrast for well defined pattern.
3. Adjust two tabs of the 4-Pole Magnets to change the angle between them (See figure 2.) and superimpose red and blue vertical lines in the center area of the picture screen.
4. Turn the both tabs at the same time keeping the angle constant to superimpose red and blue horizontal lines at the center of the screen.
5. Adjust two tabs of 6-Pole Magnets to superimpose red/blue line and green one. Adjusting the angle affects the vertical lines and rotating both magnets affects the horizontal lines.
6. Repeat adjustments 3, 4, 5 keeping in mind red, green and blue movement, because 4-Pole Magnets and 6-Pole Magnets have mutual interaction and make dot movement complex.

■ CIRCUMFERENCE CONVERGENCE ADJUSTMENT

1. Loosen the clamping screw of deflection yoke slightly to allow the yoke to tilt.
2. Temporarily put a wedge as shown in figure 1. (Do not remove cover paper on adhesive part of the wedge.)
3. Tilt front of the deflection yoke up or down to obtain better convergence in circumference. (See figure 3.) Push the mounted wedge into the space between picture tube and the yoke to fix the yoke temporarily.
4. Put other wedge into bottom space and remove the cover paper to stick.
5. Tilt front of the yoke right or left to obtain better convergence in circumference. (See figure 3.)
6. Keep the yoke position and put another wedge in either upper space. Remove cover paper and stick the wedge on picture tube to fix the yoke.
7. Detach the temporarily mounted wedge and put it in another upper space. Stick it on picture tube to fix the yoke.
8. After fixing three wedges, recheck overall convergence. Tighten the screw firmly to fix the yoke and check the yoke is firm.
9. Stick three adhesive tapes on wedges as shown in figure 1.

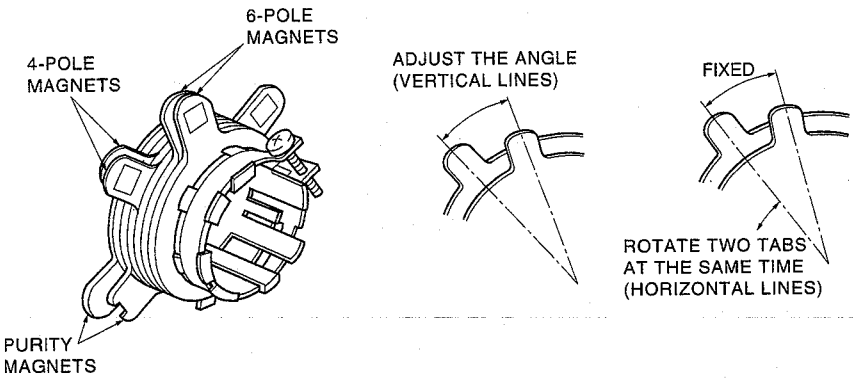

Figure 2.

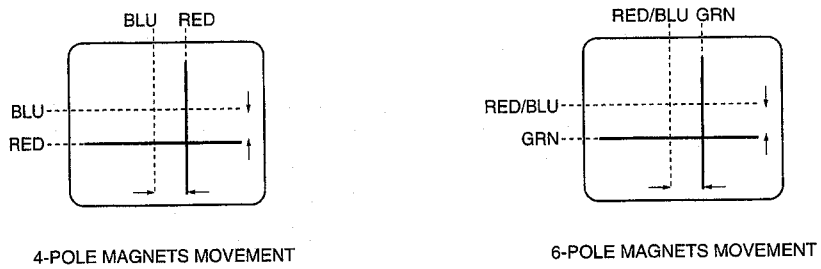

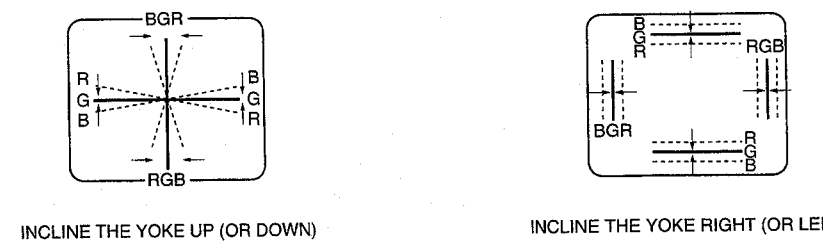

Figure 3. Dot Movement Pattern

SERVICE MODE

1. ENTERING TO SERVICE MODE

1) Press 🔇 button once on Remote Control.

2) Press 🔇 button again to keep pressing.

3) While pressing the 🔇 button, press MENU button on TV set.

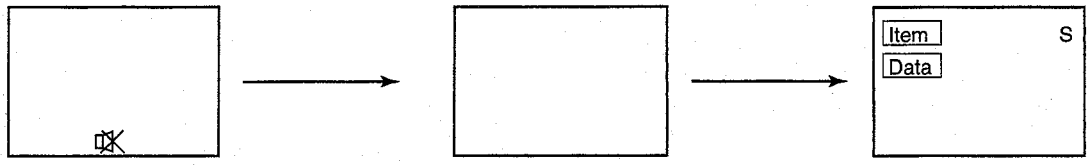

(Service mode display)

2. DISPLAYING THE ADJUSTMENT MENU

1) Press MENU button on TV.

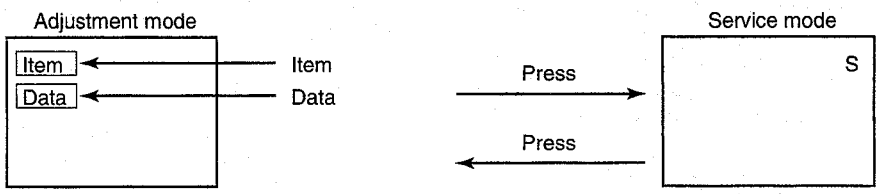

3. KEY FUNCTION IN THE SERVICE MODE

The following key entry during display of adjustment menu provides special functions.

A single horizontal line ON/OFF:	- / - - button (on Remote) or -⊖ button (on TV)
Test signal selection :	-⊖ button (on Remote)
Selection of the adjustment items :	CHANNEL ▲/▼ (on TV & Remote)
Change of the data value :	VOLUME ◿ +/– (on TV & Remote)
Adjustment menu mode ON/OFF :	MENU button on TV
Initialization of the memory (QA02) :	CALL + CHANNEL button on TV (▲)
Reset the count of operating protect circuit to "00":	CALL + CHANNEL button on TV (▼)
"RCUT" selection :	1 button
"GCUT" selection :	2 button
"BCUT" selection :	3 button
"CNTX" (or "SCNT") selection :	4 button
"COLC" selection :	5 button– – – – Color thickness correction
"TNTC" selection :	6 button note: Displayed differently as shown below, depending on the setting of the receiving color system.
Test audio signal ON/OFF (1kHz) :	8 button
Self diagnostic display ON/OFF :	9 button
	COLP (PAL)
	COLC (NTSC)
	COLS (SECAM)

CAUTION : Never try to perform initialization unless you have changed the memory IC.

4. SELECTING THE ADJUSTING ITEMS

1) Every pressing of CHANNEL ▲ button in the service mode changes the adjustment items in the order of table-2. (▼ button for reverse order)

Refer to table-2 for preset data of adjustment mode. (See SETTING & ADJUSTING DATA on page 16)

5. ADJUSTING THE DATA

1) Pressing of VOLUME ◿ +/– button will change the value of data in the range from 00H to FFH. The variable range depends on the adjusting item.

6. EXIT FROM SERVICE MODE

1) Pressing POWER button to turn off the TV once.

■ INITIALIZATION OF MEMORY DATA OF QA02

After replacing QA02, the following initialization is required.

1. Enter the service mode, then select any register item.
2. Press and hold the CALL button on the Remote, then press the CHANNEL ▲ button on the TV. The initialization of QA02 has been complated.
3. Check the picture carefully. If necessary, adjust any adjustment item above. Perform "Auto search Memory" on the owner's manual.

CAUTION: Never attempt to initialize the data unless QA02 has been replaced.

7. TEST SIGNAL SELECTION

Every pressing of ⊖ button on the Remote Control changes the built-in test patterns on screen as described below in SERVICE MODE.

Signal off → NTSC signals (14 patterns) → PAL signals (14 patterns) → Signal off

Signals	Picture
• Red raster • Green raster • Blue raster • All Black • All White	
• Black & White	
• Black cross-bar • White cross-bar • Black cross-bar on green raster	
• Black cross-hatch • White cross-hatch	
• Black cross-dot • White cross-dot	
• H signal (white) • H signal (black)	

* The signals marked with ▒ are not usable to display in the Test signal for some model.

SELF DIAGNOSTIC FUNCTION

1) Press "9" button on Remote Control during display of adjustment menu in the service mode.
   The diagnosis will begin to check if interface among IC's are executed properly.
2) During diagnosis, the following displays are shown.

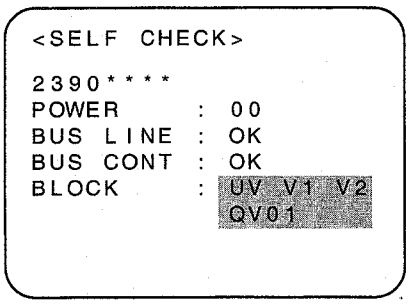

① Part number of microcomputer (QA01)
② Operation number of protecting circuit ----"00" is normal.
When indication is other than "00", overcurrent apts to flow, and circuit parts may possibly be damaged.
③ BUS LINE CHECK ----"OK" is normal.
"SCL(SCL1)-GND" ..... SCL-GND short circuit
"SDA(SDA1)-GND" ..... SDA-GND short circuit
"SCL(SCL1)-SDA (SDA1)" ... SCL-SDA short circuit
④ BUS CONT ----"OK" is normal.
When indication shows "Q ○○○ NG", the device with the number may possibly be damaged.
⑤BLOCK
UV : TV reception mode
V1 : VIDEO 1 input mode (→①1)
V2 : VIDEO 2 input mode (→①2)

Indicated color of mode now selected : Green and Red
Indicated color of other modes : White

Green : Normal
Red : The microcomputer operates to provide judgement of no video signal. The red color is still indicated though the signal is input, failure may exist in input signal line including QV01.
QV01 : In case of indication green ---Normal
In case of indication red with input signal----
Failure may exist in output line including QV01.

NOTE: Component which controls character display on screen is ICF01 (TELETEXT IC.). If this display function fails to operate due to damage in ICF01, self diagnosis procedure is as follows.
(1) In case that power indicator is blinking with interval of 0.5 seconds, it means protecting circuit (Current limiter) is operating, and circuit components may possibly be damaged. Check related components.
(2) In case that power indicator is blinking with interval of 1 second, Protecting circuit does not operate, but a part of Bus line does not operate normally. Check Bus line.

* The items marked with ▩ are not usable to display in the SELF DIAGNOSTIC FUCTION for some model.

DESIGN MODE

1. ENTERING TO DESIGN MODE

1) Select the Service mode. 2) While pressing 🔇 (or CALL) button on Remote and press MENU button on TV. 3) Press MENU button on TV.

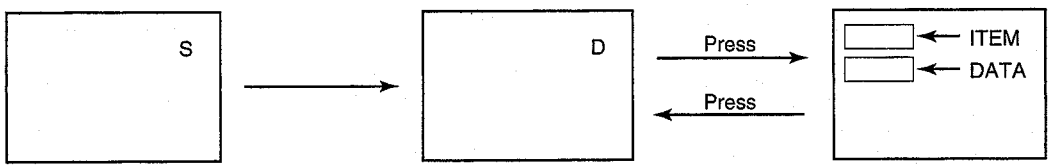

(Design mode) (Adjustment mode)

When QA01 is initialized, items "OPT0" and "OPT1" of DESIGN MODE are set to the data of the representative model of this chassis family.
Therefore, because ON-SCREEN specification remains in the state of the representative of model. This model is required to reset the data of items "OPT0" and "OPT1".

2. SELECTING THE ADJUSTING ITEMS

Every pressing of CHANNEL ▼ button in the design mode changes the adjustment items in the order of table-3.

Refer to table-3 for data of design mode.
(See SETTING & ADJUSTING DATA on page 17)

3. ADJUSTING THE DATA

Pressing of VOLUME ▲ or ▼ (◿ +/–) button will change the value of data.

ELECTRICAL ADJUSTMENTS

ITEM	ADJUSTMENT PROCEDURE
FOCUS VR ADJ.	1. Enter the service mode, then select any register item. 2. Press the TV/VIDEO button on the Remote until the black cross-bar pattern appears on the screen. 3. Adjust the FOCUS control (on T461) for well defined scanning lines on the picture screen.
SUB-BRIGHTNESS (BRTC) Note: Constrict the picture height until the vertical retrace line appears adjusting the item HIT (HEIGHT).	1. Set CONTRAST to minimum, and BRIGHTNESS to center by adjusting user controls. 2. Set the TV in service mode to get white cross-bar of inside pattern. 3. Select BRTC (brightness correction), and adjust the ◿ – /+ button to reduce the value so that white portion of inside pattern slightly light. 4. Adjust ◿ – /+ button to increase the data value of BRTC, and set it just before the difference between the belt of vertical retrace and the border of black portion of inside pattern is visible. After that, return vertical height and contrast.  Belt of vertical retrace
HORIZONTAL POSITION ADJUSTMENT (HPOS) VERTICAL POSITION ADJUSTMENT (VPOS)	1. Set the TV in service mode, and get black or white cross-bar signal with VIDEO button on remote hand unit. 2. Select either HPOS (Horizontal picture phase) or VPOS (Vertical picture phase) with CHANNEL ▲, ▼ buttons, and adjust horizontal or vertical picture position in the center of screen with VOLUME ◿ – /+ buttons. 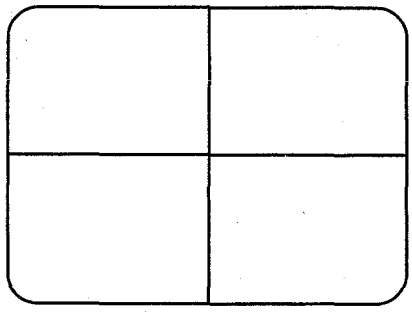
VERTICAL AMPLITUDE ADJUSTMENT (HIT)	1. Set the TV in service mode, and get black or white cross-hatch signal with VIDEO button on remote hand unit. 2. Select HIT (Vertical amplitude) with CHANNEL ▲, ▼ buttons, and adjust vertical amplitude with VOLUME ◿ – /+ buttons so that vertical amplitude lacks a little. 3. Adjust vertical amplitude with VOLUME ◿ – /+ buttons so that the first bar on cross-hatch signal touches edge of screen. The first 

ITEM	ADJUSTMENT PROCEDURE
WHITE BALANCE ADJUSTMENT ● CUTOFF ADJUSTMENT (RCUT) (GCUT) (BCUT) ● DRIVE ADJUSTMENT (GDRV) (BDRV)	1. Set Contrast to 40, and brightness to +20 by picture control. 2. Set the TV in service mode, and get the inside W/B adjusting signal with VIDEO button. 3. Select RCUT, GCUT and BCUT with CHANNEL ▲, ▼ buttons, to set individual values to 32, and to set GDRV and BDRV to 20 with VOLUME ◿ – /+ buttons. 4. Press -/- - button on the remote control and rotate Screen VR to get one slight horizontal line on screen. Note: Every pressing of -/- - button provides Horizontal line picture and Normal picture alternately. 5. Press -/- - button to release horizontal line picture, and select the two other colors which did not light in the above step with CHANNEL ▲, ▼ buttons. Then tap VOLUME ◿ – /+ buttons so that three colors slightly light in the same level. ※ To correct white balance in light area, select GDRV and BDRV with CHANNEL ▲, ▼ buttons to adjust. ※ To correct white balance in dark area, perform fine adjustment of RCUT, GCUT and BCUT. 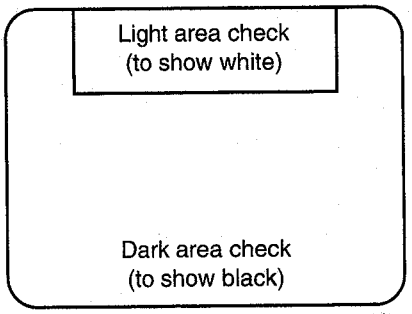

C7SS Series (Reference Factory Adjustments)

Item. [SCNT]
Name. SUB-CONTRAST SETTING. DYNAMIC MODE Input signal. SUB-BRIGHT SIGNAL Measurement place. Q501 #55PIN (TP501) Adjustment method. Adjust the amplitude from pedestal-level to a white peak. Making standard 2.3±0.2Vop
Item. [BRTC]
Name. SUB-BRIGHT CENTER SETTING. DYNAMIC MODE Input signal. SUB-BRIGHT SIGNAL Measurement place. On picture Adjustment method. It is black step of the (*sub-bright*) signal and adjust the number. Making standard 4±1.5 bar
Item. [COLP]
Name. SUB-COLOR CENTER (PAL) SETTING. DYNAMIC MODE Input signal. SUB-BRIGHT SIGNAL (PAL) Measurement place. Q501 #55PIN (TP501) Adjustment method. Adjust the amplitude of B-Y. Making standard 1.40±0.2 Vop
Item. [RCUT], [GCUT], [BCUT], [GDRV], [BDRV], [SCREEN VR]
Name. CUT OFF/DRIVE ADJUST SETTING. [RCUT], [GCUT], [BCUT], [GDRV], [BDRV] each data set = 40h Set to White line mode0 Input signal. White signal Measurement place. On picture. Adjustment method. Raise screen VR gradually and stop in the place where the line of either of R or G or B shines slightly. Decide the position of screen VR there. Raise the color data other than the line which shines by first gradually shine point. Stop in the place which shines in most white. Make clear white line mode. Adjust it repeatedly for both the shade part and discernment to become a correct numerical value by using proofread CA100. Making standard 103cd/m² 8750K –0.002uv 17cd/m² 8750K –0.002uv

Item. [BELL]
Name. BELL FILTER SETTING. NONE Input signal. SECAM COLOR BAR. Measurement place. QQ01 #21 (TPM01) Adjustment method. Adjust with the synchroscope as the display crimp is flat. Making standard 100±10%
Item. [SRY]
Name. SECAM R-Y BLACK LEVEL. SETTING. DYNAMIC MODE Input signal. SECAM COLOR BAR. Measurement place. Q501 #55 (TP501) Adjustment method. Adjust [SRY] the level of the monochrome signal part must be a match to the level of horizontal blanking signal. Making standard 0±40mV
Item. [SBY]
Name. SECAM B-Y BLACK LEVEL. SETTING. DYNAMIC MODE Input signal. SECAM COLOR BAR. Measurement place. Q501 #55 (TP501) Adjustment method. Adjust [SBY] the level of the monochrome signal part must be a mutch to the level of horizontal blanking signal. Making standard 0±40mV
Item. [COLS]
Name. SUB-COLOR CENTER (SECAM). SETTING. DYNAMIC MODE Input signal. SECAM COLOR BAR. Measurement place. Q501 #55 (TP501) Adjustment method. Adjust the amplitude of R-Y. (Mute the picture in adjustment) Making standard 1.90±0.2Vop (Pedestal to peak)
Item. [VERT POSITION]
SETTING. CONTRAST=MAX. BRIGHT=CENTER COLOR=CENTER Input signal. WG Philips Pattern (Do not use French SECAM). Measurement place. On Screen Adjustment method. a:Adjust the height so as to appear the flag of both upper and lower side. b:Adjust the picture to the center of the screen by [VPOS].

Item. [V.HEIGHT]
SETTING. CONTRAST=MAX. BRIGHT=CENTER COLOR=CENTER Input signal. WG Philips Pattern (Do not use French SECAM). Measurement place. On Screen Adjustment method. Adjust the Picture so as to just disappear the flag of both upper and lower side with [HIT].
Item. [HORIZONTAL POSITION]
SETTING. CONTRAST=MAX. BRIGHT=CENTER COLOR=CENTER Input signal. WG Philips Pattern (Do not use French SECAM). Measurement place. On Screen Adjustment method. Adjust the Picture of Philips pattern to the center of the screen with [HPOS]. (Minimize D-C by the CRT adjustment magnetic field)
Item. [HORIZONTAL WIDTH] [SIDE PINCTION] [TRAPEZOID DISTORTION]
SETTING. CONTRAST=MAX. BRIGHT=CENTER COLOR=CENTER After V-HIGHT/V-POSITION adjustment. Input signal. WG Philips Pattern (Do not use French SECAM). Measurement place. On Screen Adjustment method. 1. Width: a: French Model; Adjust the width to just disappear the first line marker inside the flag of left and right side with [WID]. b: Other Model; Adjust the width to just disappear the flag of both left and right side with [WID]. 2. E/W : Adjust the vertical bar of both left and right end to the straightline it with [DPC]. 3. Trapezium : Compensate the trapeqoid distortion with [TRAP]. 4. Width : Adjust the width again. (Turn the direction of CPT to the east or the west when adjusting. adjust the amount offsetting if it is not possible to do.)
Item. [Vertical, synchronous VR adjustment] (R4350)]
SETTING. UNIT ADJUSTMENT Adjustment method. Supply +12V to the terminal HVCC. Adjust the frequency of the terminal Q420#24 with a frequency counter to 80.0(+2.0)(−1.0)Hz. Note: Connect power supply GND with GND of all connectors when you supply the power supply.
Item. [Horizontal, synchronous VR adjustment] (R4450)
SETTING. UNIT ADJUSTMENT Adjustment method. Supply +12V to the terminal HVCC. Adjust the frequency of the terminal Q420#24 with a frequency counter to 31.36±0.15kHz. Note: Connect power supply GND with GND of all connectors when you supply the power supply.

CIRCUIT CHECK

HIGH VOLTAGE CHECK

CAUTION: There is no HIGH VOLTAGE ADJUSTMENT on this chassis. Checking should be done following the steps below.

1. Connect an accurate high voltage meter to the second anode of the picture tube.
2. Turn on the receiver. Set the BRIGHTNESS and CONTRAST controls to minimum (zero beam current).
3. High voltage must be measured below Ⓑ kV.

Refer to table-1 for high voltage Ⓑ.
(See SETTING & ADJUSTING DATA on page 16)

4. Vary the BRIGHTNESS control to both extremes to be sure the high voltage does not exceed the limit under any conditions.

CHAPTER 2 SPECIFIC INFORMATIONS

SETTING & ADJUSTING DATA

【SAFETY INSTRUCTIONS】

		2876DD	2876DF
HIGH VOLTAGE AT ZERO BEAM:	Ⓐ	31.8 kV	31.8 kV
MAX HIGH VOLTAGE:	Ⓑ	32.0 kV	32.0 kV
AV VOLTAGE:	Ⓒ	220 ~ 240 V	

Table-1

【SERVICE MODE】

ADJUSTING ITEMS AND DATAS IN THE SERVICE MODE:

Item	Adjustments	Reference data
RCUT	R CUTOFF (B/W)	40H
GCUT	G CUTOFF (B/W)	40H
BCUT	B CUTOFF (B/W)	40H
GDRV	G DRIVE	40H
BDRV	B DRIVE	40H
CNTX	SUB CONTRAST MAX (4:3 MODE)	7FH
BRTC	SUB BRIGHT CEN	80H
COLC	SUB COLOR CEN NTSC	00H
TNTC	SUB TINT CEN	48H
COLP	SUB COLOR CEN PAL	39H
COLS	SUB COLOR CEN SECAM	00H
SCOL	SUB COLOR	07H
SCNT	SUB CONTRAST	19H
VOLS	VOL SCART	00H
FVOL	FM VOL PRE SCALE	00H
NVOL	NICAM VOL PRE SCALE	00H
NICL	NICAM THRESHOLD LEVEL	00H
NICH	NICAM THRESHOLD LEVEL	00H
IDL	IGR THRESHOLD LEVEL	00H
IDH	IGR THRESHOLD LEVEL	00H
XVOL	EXT PRE. VOLUME	11H
EMX	NICAM ON LEVEL	FCH
EMN	NICAM OFF LEVEL	64H
HPOS	50Hz H-POSITION	05H
VPOS	V-POSITION	0BH
HIT	HEIGHT	58H
VLIN	V-LINEARITY	18H
VSC	V-S CORRECTION	19H
VPS	V-SHIFT	0BH
VCP	V-COMPENSATION	09H
WID	PICTURE WIDTH	2BH
PARA	E-W PARABOLA	29H
CNR	E-W CORNER	07H
TRAP	TRAPEZIUM	27H
HCP	H-COMPENSATION	08H
VFC	V-F CORRECTION	0FH
BELL	SECAM BELL FILTER	80H
SRY	SECAM R-Y	08H
SBY	SECAM B-Y	08H
HVPU	—	00H

This item may require adjustments by models after initialization, when QA02 is replaced.

Table-2

【 DESIGN MODE 】

ADJUSTING ITEMS AND DATAS IN THE DESIGN MODE:

Item	Name of adjustment		Data		Remarks
		Preset Data	2876DD	2876DF	
RCUT					
OPT1	OPTION 1	32H	32H	32H	
OPT0	OPTION 0	86H	46H	00H	
OSD					
・					
・					
・					
・					
・					
RCUT					

Table-3

LOCATION OF CONTROLS (TV SET)

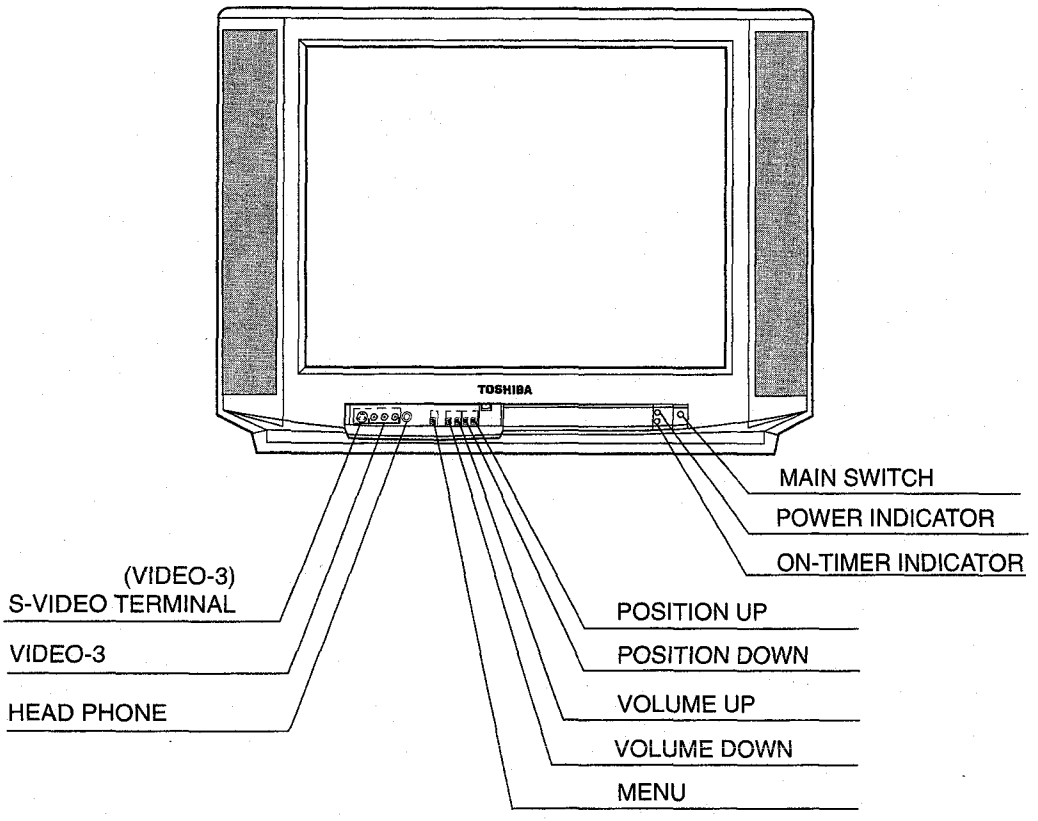

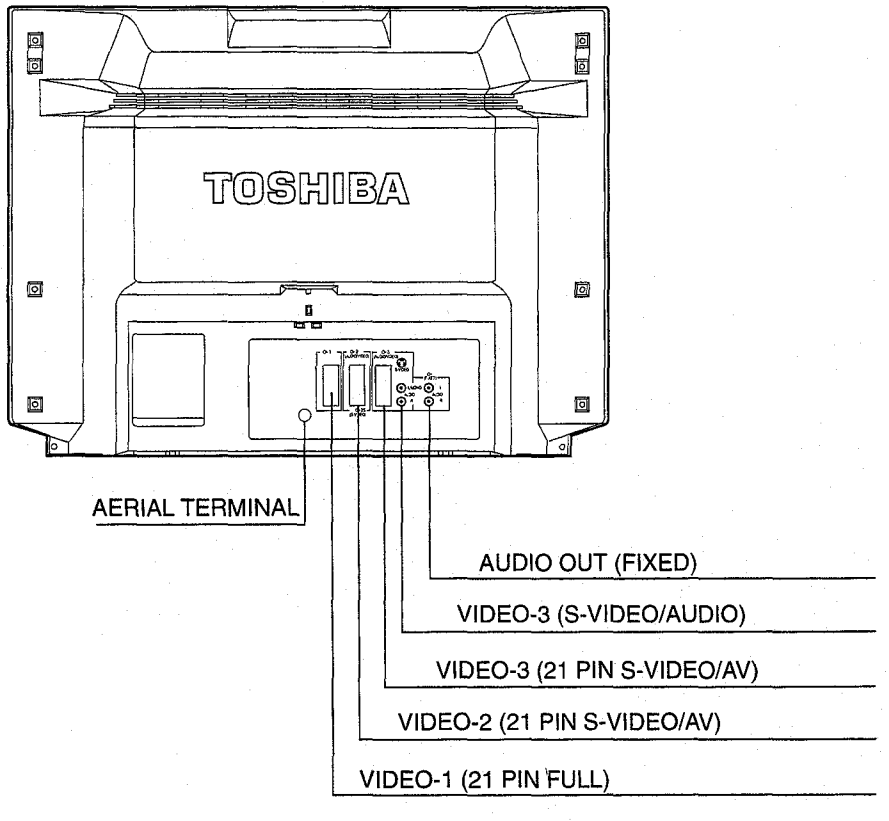

LOCATION OF CONTROLS (REMOTE CONTROL)

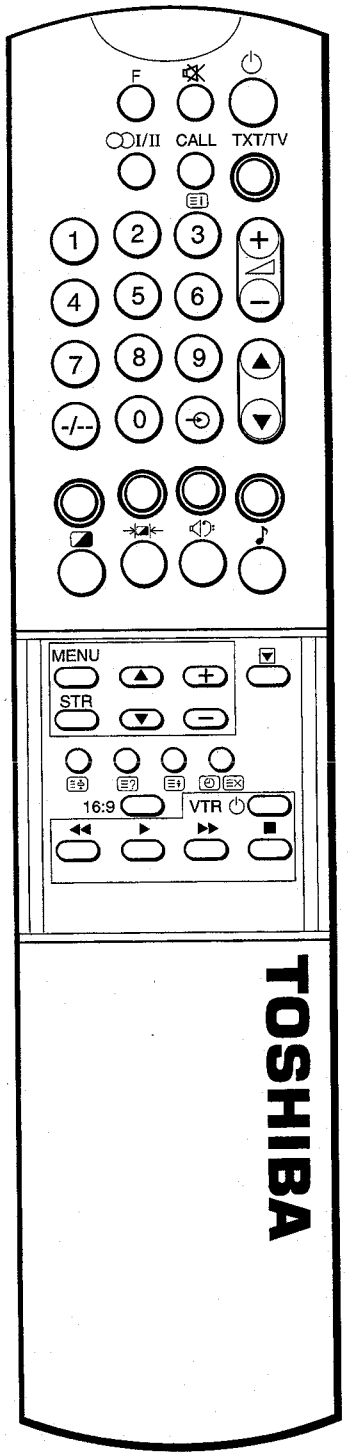

KEY ASSIGNMENT

⏻ ..... ON/STAND-BY
🔇 ..... Sound mute
F ..... (Quick/advanced operation)
CALL (On-screen call)/📖 (index, initial) ..... TELETEXT MODE
◪ ..... PICTURE MENU
♪ ..... SOUND MENU
I/II ..... <TV MODE> ..... STEREO BILINGUAL
1~9, 0 ..... TEN KEY
- / - -..... 1 or 2 place
⊖ ..... VIDEO INPUT (EXTERNAL INPUT SOURCE SW.)
◿..... VOLUME
+ ..... LEVEL PLUS (VOLUME, MENU)
– ..... LEVEL MINUS (VOLUME, MENU)
▲ ..... UP (POSI., CH., TEXT PAGE)
▼ ..... DOWN (POSI., CH., TEXT PAGE)

TELE-TEXT
- TXT/TV ... TEXT, MIX, TV MODE SW.
- ..... HOLD
- ..... <TEXT MODE> ..... REVEAL / CONCEAL
- ..... <TEXT MODE> ..... F-T-B (FULL, TOP, BOTTOM)
- ⏻/EX..... TIME DISPLAY (TV MODE) / TEXT CLEAR (TEXT MODE)
- FLOF COLOUR KEY (4 key used) Red/Green/Yellow/Blue

Super woofer
Selectable picture
MENU..... TUNING & OTHER MENU
STR ..... Store
/ ..... Menu select
/ ..... Level down/up
16:9 ..... PIC SIZE (Picture size select)

VTR control
⏻ Power on/standby
▶ Play
■ Stop
◀◀ Rewind
▶▶ Fast forward

SPECIFIC INFORMATIONS

SERVICE POSITION

1. Disconnect the lead wires for the speaker fixed to the degausser coil with three omega clips. And lifting up slightly, pull out the chassis from the front mask.

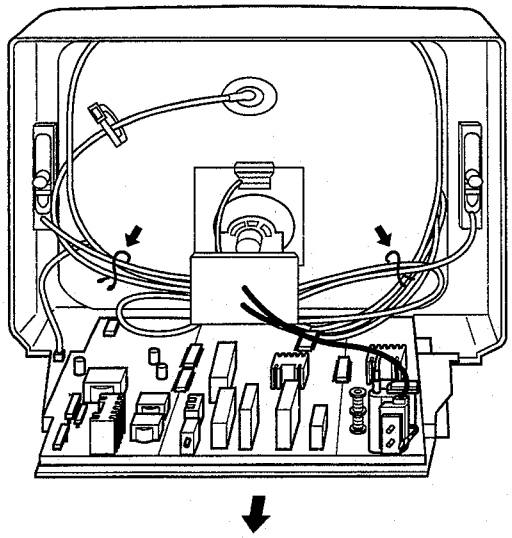

2. There is a slit at the left front of the bottom side of the front mask. Lift up the left side of the chassis and insert the hook at the right side into the slit.

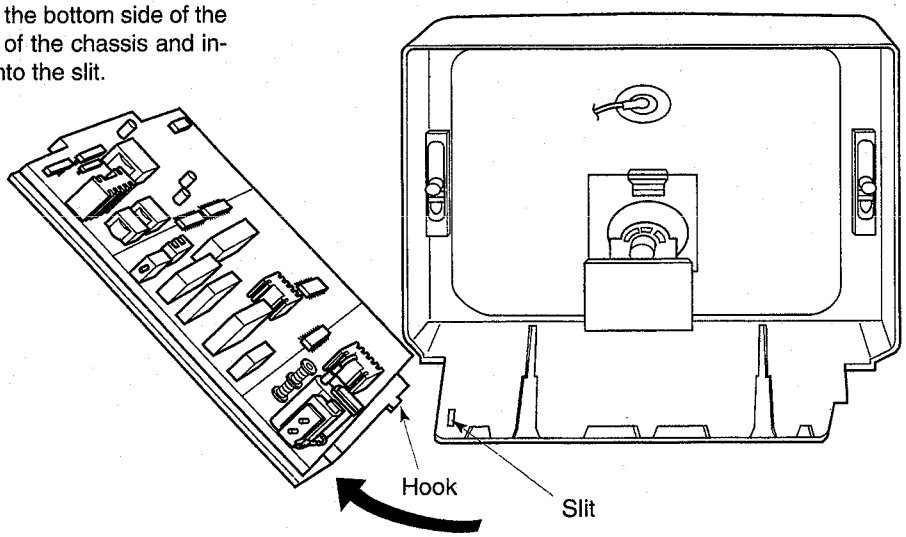

3. To retain the chassis, use the upper left boss (highest boss) which is marked with No. 29. And fix it with screws for back cover fixing.
   Upper hole of the chassis frame.

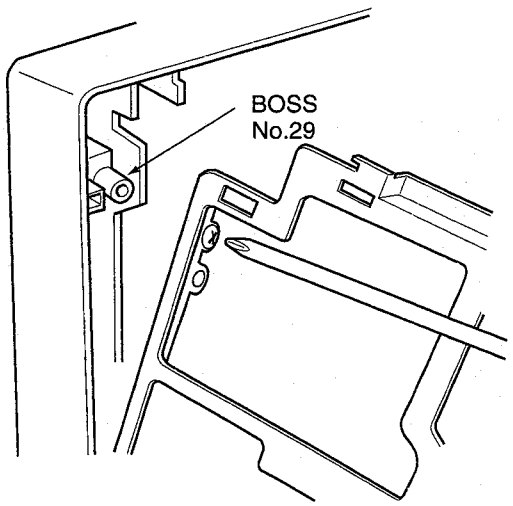

4. After repair works, restore the unit by reversing the above steps.

CIRCUIT BLOCK DIAGRAM

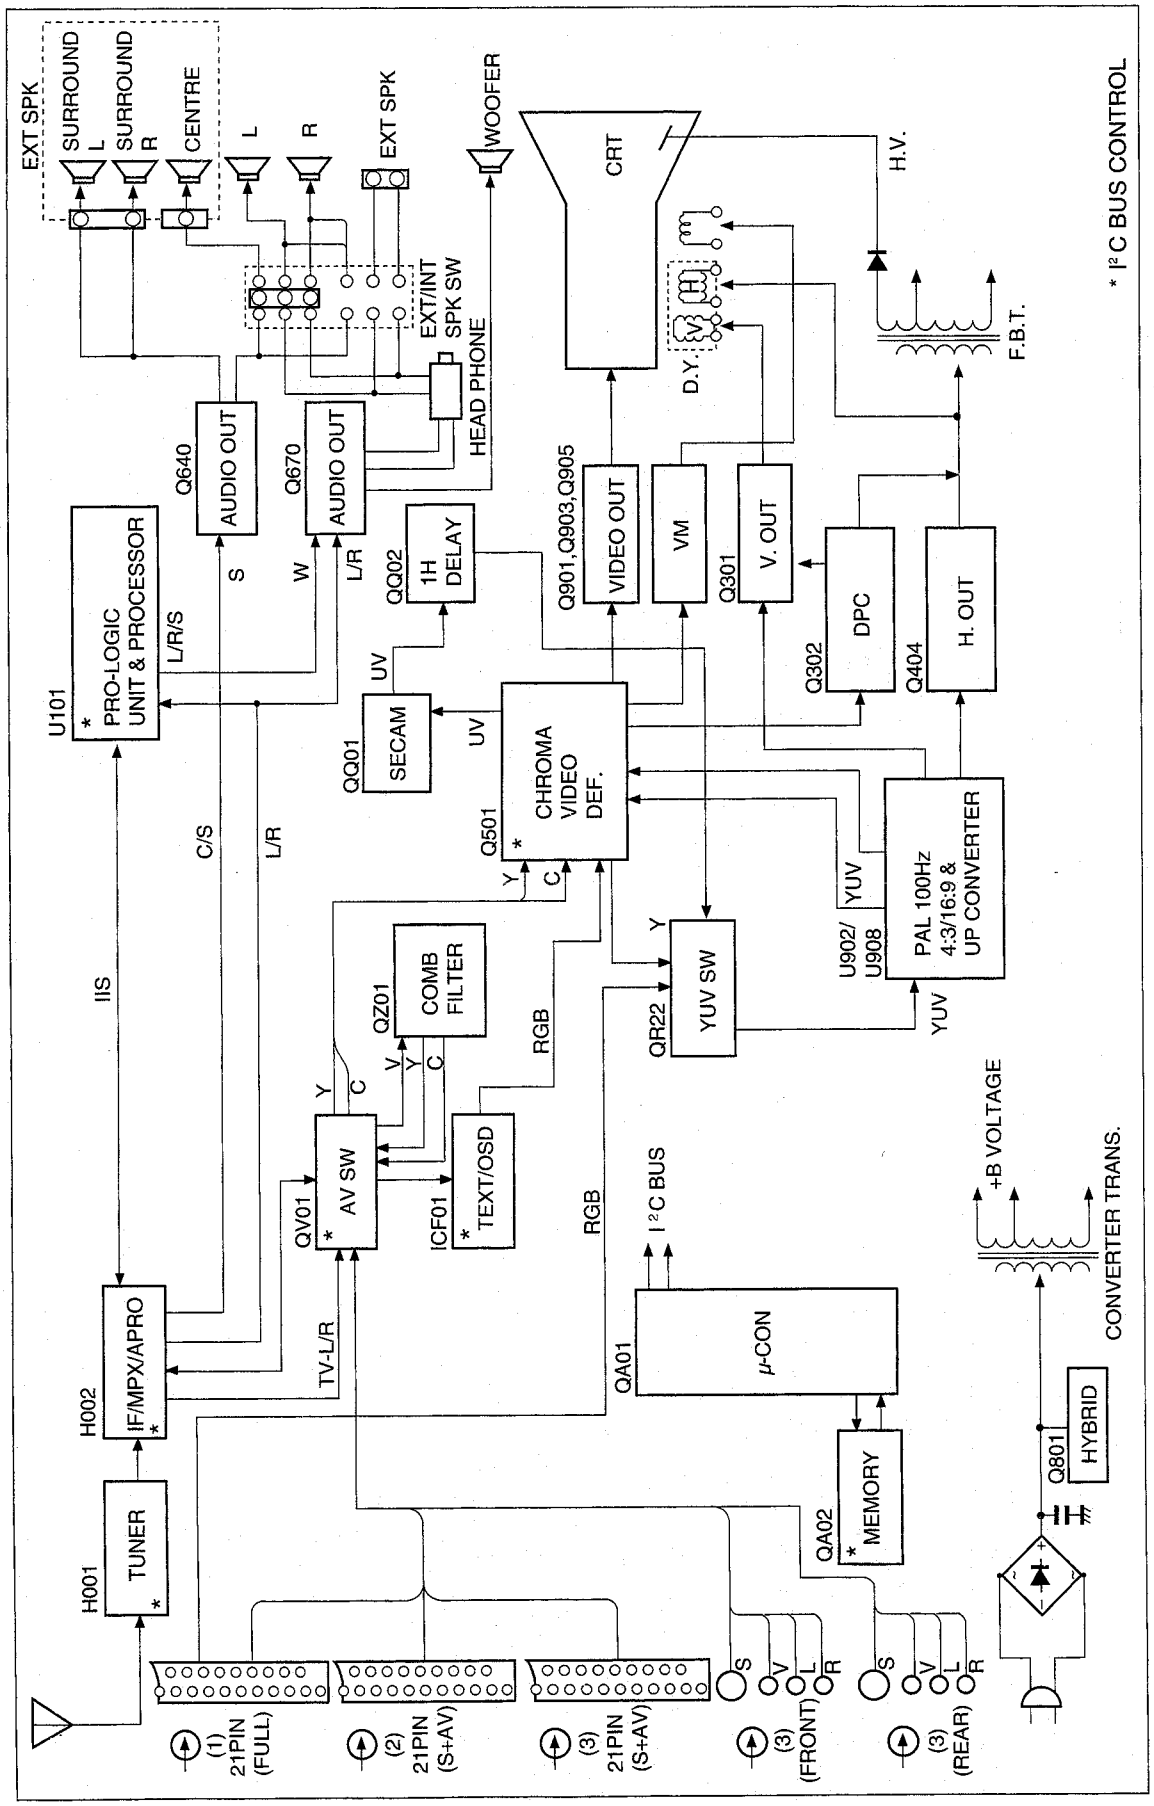

CABINET REPLACEMENT PARTS LIST

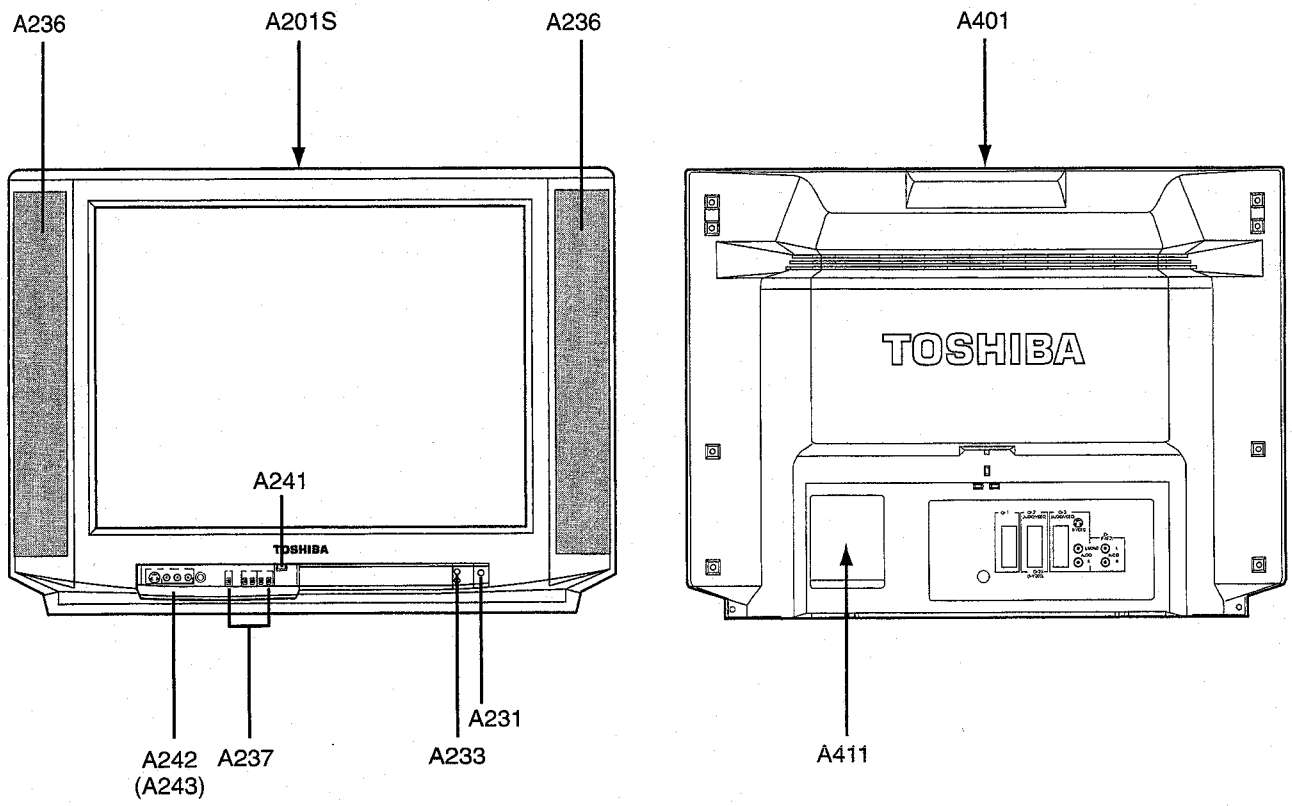

Location No.	Part No.	Description
A201S	23510020	Front Cover
A231	23444902	Button, POWER
A233	23430336	Lens, Remote
A236	23519547	Speaker Grille
A237	23443966	Button, Control
A241	70368125	Push Catch for Door
A242	23426957	Door, Proper
A243	23421759	Piece, Decorative
⚠A401	23426393	Back Cover
A411	23560509	Label, Model No. (2876DD)
A411	23560541	Label, Model No. (2876DF)

CHASSIS REPLACEMENT PARTS LIST

WARNING: BEFORE SERVICING THIS CHASSIS, READ THE "X-RAY RADIATION PRECAUTION", "SAFETY PRECAUTION" AND "PRODUCT SAFETY NOTICE" ON PAGE 3 OF THIS MANUAL.

CAUTION: The international hazard symbols "⚠" in the schematic diagram and the parts list designate components which have special characteristics important for safety and should be replaced only with types identical to those in the original circuit or specified in the parts list. The mounting position of replacements is to be identical with originals. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE on page 3. Do not degrade the safety of the receiver through improper servicing.

NOTICE:
- *The part number must be used when ordering parts, in order to assist in processing, be sure to include the Model number and Description.*
- *The PC board assembly with * mark is no longer available after the end of the production.*

Models : 2876DD, 2876DF

Capacitors	CD	:	Ceramic Disk	PF	:	Plastic Film	EL	: Electrolytic
Resistors	CF	:	Carbon Film	CC	:	Carbon Composition	MF	: Metal Film
	OMF	:	Oxide Metal Film	VR	:	Variable Resistor	FR	: Fusible Resistor

(All CD and PF capacitors are ±5%, 50V and all resistors, ±5%, 1/6W unless otherwise noted.)

Location No.	Part No.	Description
CAPACITORS		
C101	24797229	EL, 2.2μF, ±20%, 50V(2876DF)
C102	24763221	EL, 220μF, ±20%, 16V
C103	24232103	CD, 0.01μF, +80%, −20%
C104	24794470	EL, 47μF, ±20%, 16V
C105	24212102	CD, 1000pF, ±10%
C106	24797100	EL, 10μF, ±20%, 50V
C107	24763221	EL, 220μF, ±20%, 16V
C108	24763101	EL, 100μF, ±20%, 16V
C109	24232103	CD, 0.01μF, +80%, −20%
C115	24232103	CD, 0.01μF, +80%, −20%
C116	24763221	EL, 220μF, ±20%, 16V
C183	24797229	EL, 2.2μF, ±20%, 50V(2876DD)
C183	24797479	EL, 4.7μF, ±20%, 50V(2876DF)
C201	24206100	EL, 10μF, 50V
C203	24538104	PF, 0.1μF
C204	24206010	EL, 1μF, 50V
C205	24206229	EL, 2.2μF, 50V
C206	24797220	EL, 22μF, ±20%, 50V
C207	24436100	CD, 10pF, ±0.25pF
C208	24436100	CD, 10pF, ±0.25pF
C209	24436100	CD, 10pF, ±0.25pF
C211	24353330	CD, 33pF
C212	24794100	EL, 10μF, ±20%, 16V
C214	24591334	PF, 0.33μF
C215	24474101	CD, 100pF, ±10%
C216	24436101	CD, 100pF
C218	24436390	CD, 39pF
C303	24214471	CD, 470pF, ±10%, 500V
C304	24693473	PF, 0.047μF, 100V
C305	24617912	EL, 2.2μF, ±10%, 50V
C306	24073059	EL, 3300μF, ±20%, 25V
C307	24793101	EL, 100μF, ±20%, 10V
C308	24668221	EL, 220μF, ±20%, 35V
C309	24668101	EL, 100μF, ±20%, 35V
C310	24796222	EL, 2200μF, ±20%, 35V
C311	24538473	PF, 0.047μF
C312	24591273	PF, 0.027μF
C313	24082058	PF, 0.27μF, 100V
C315	24797229	EL, 2.2μF, ±20%, 50V
C315	24212102	CD, 1000pF, ±10%

Location No.	Part No.	Description
C316	24538393	PF, 0.039μF
C318	24666101	EL, 100μF, ±20%, 16V
C319	24212102	CD, 1000pF, ±10%
C321	24591203	PF, 0.02μF
C323	24538224	PF, 0.22μF
C324	24538683	PF, 0.068μF
C325	24617912	EL, 2.2μF, ±10%, 50V
C327	24617787	EL, 470μF, ±20%, 16V
C328	24232103	CD, 0.01μF, +80%, −20%
C341	24797478	EL, 0.47μF, ±20%, 50V
C366	24693473	PF, 0.047μF, 100V
C370	24794101	EL, 100μF, ±20%, 16V
C371	24794100	EL, 10μF, ±20%, 16V
C401	24538104	PF, 0.1μF
C403	24591333	PF, 0.033μF
C404	24797229	EL, 2.2μF, ±20%, 50V
C410	24092341	CD, 470pF, ±10%, 2kV
C413	24214332	CD, 3300pF, ±10%, 500V
C416	24668101	EL, 100μF, ±20%, 35V
C417	24214391	CD, 390pF, ±10%, 500V
C419	24212102	CD, 1000pF, ±10%
C420	24763101	EL, 100μF, ±20%, 16V
C421	24539104	PF, 0.1μF
C423	24829473	PF, 0.047μF, 400V
C430	24232103	CD, 0.01μF, +80%, −20%
C431	24212103	CD, 0.01μF, ±10%
C431	24794102	EL, 1000μF, ±20%, 16V
C439	24082830	PF, 3000pF, ±3%, 1800V
C440	24082830	PF, 3000pF, ±3%, 1800V
C442	24082642	PF, 0.16μF, 400V
C443	24082644	PF, 0.2μF, 400V
C444	24082827	PF, 2200pF, ±3%, 1800V
C445	24828473	PF, 0.047μF, 200V
C446	24679330	EL, 33μF, ±20%, 250V
C448	24640908	EL, 33μF, ±20%, 160V
C460	24796331	EL, 330μF, ±20%, 35V
C461	24082827	PF, 2200pF, ±3%, 1800V
C462	24796222	EL, 2200μF, ±20%, 35V
C463	24212392	CD, 3900pF, ±10%
C464	24640900	EL, 4.7μF, 100V
C465	24591683	PF, 0.068μF

Location No.	Part No.	Description
C466	24095884	PF, 0.013μF, ±3%, 630V
C469	24092337	CD, 220pF, ±10%, 2kV
C470	24794220	EL, 22μF, ±20%, 16V
C472	24538474	PF, 0.47μF
C473	24669010	EL, 1μF, ±20%, 50V
C475	24095887	PF, 0.01μF, ±3%, 630V
C477	24590563	PF, 0.056μF
C478	24590563	PF, 0.056μF
C479	24214471	CD, 470pF, ±10%, 500V
C481	24538104	PF, 0.1μF
C484	24591152	PF, 1500pF
C491	24082749	PF, 1.5μF, 250V
C492	24082645	PF, 0.22μF, 400V
C494	24082644	PF, 0.2μF, 400V
C495	24092343	CD, 680pF, ±10%, 2kV
C496	24092343	CD, 680pF, ±10%, 2kV
C501	24212101	CD, 100pF, ±10%
C502	24232103	CD, 0.01μF, +80%, -20%
C503	24763101	EL, 100μF, ±20%, 16V
C504	24591222	PF, 2200pF
C505	24353120	CD, 12pF
C507	24353120	CD, 12pF
C508	24206100	EL, 10μF, 50V
C509	24763101	EL, 100μF, ±20%, 16V
C510	24763101	EL, 100μF, ±20%, 16V
C511	24232103	CD, 0.01μF, +80%, -20%
C512	24206228	EL, 0.22μF, 50V
C513	24092398	CD, 0.1μF, +80%,-20%
C514	24538104	PF, 0.1μF
C515	24538104	PF, 0.1μF
C516	24212102	CD, 1000pF, ±10%
C517	24353010	CD, 1pF
C519	24353010	CD, 1pF
C520	24474102	CD, 1000pF, ±10%
C521	24212102	CD, 1000pF, ±10%
C522	24473470	CD, 47pF
C523	24473470	CD, 47pF
C524	24436561	CD, 560pF
C525	24353181	CD, 180pF
C526	24474101	CD, 100pF, ±10%
C613	24794470	EL, 47μF, ±20%, 16V
C652	24668471	EL, 470μF, ±20%, 35V
C660	24206229	EL, 2.2μF, 50V
C661	24538104	PF, 0.1μF
C664	24203100	EL, 10μF, ±20%, 16V
C665	24206229	EL, 2.2μF, 50V
C666	24206229	EL, 2.2μF, 50V
C667	24232103	CD, 0.01μF, +80%, -20%
C668	24212102	CD, 1000pF, ±10%
C669	24668330	EL, 33μF, ±20%, 35V
C670	24668330	EL, 33μF, ±20%, 35V
C671	24797010	EL, 1μF, ±20%, 50V
C673	24797010	EL, 1μF, ±20%, 50V
C673	24474102	CD, 1000pF, ±10%
C674	24797010	EL, 1μF, ±20%, 50V
C674	24474102	CD, 1000pF, ±10%
C675	24474102	CD, 1000pF, ±10%
C675	24795470	EL, 47μF, ±20%, 25V
C676	24474102	CD, 1000pF, ±10%
C676	24797479	EL, 4.7μF, ±20%, 50V
C677	24591102	PF, 1000pF
C678	24474102	CD, 1000pF, ±10%
C678	24591102	PF, 1000pF
C679	24474102	CD, 1000pF, ±10%

Location No.	Part No.	Description
C679	24538104	PF, 0.1μF
C680	24668102	EL, 1000μF, ±20%, 35V
C681	24668471	EL, 470μF, ±20%, 35V
C681	24474102	CD, 1000pF, ±10%
C682	24668471	EL, 470μF, ±20%, 35V
C682	24474102	CD, 1000pF, ±10%
C683	24668102	EL, 1000μF, ±20%, 35V
C684	24591124	PF, 0.12μF
C685	24591124	PF, 0.12μF
C686	24591124	PF, 0.12μF
C687	24232103	CD, 0.01μF, +80%, -20%
C688	24203220	EL, 22μF, ±20%, 16V
C704	24232103	CD, 0.01μF, +80%, -20%
C705	24797229	EL, 2.2μF, ±20%, 50V
C707	24794470	EL, 47μF, ±20%, 16V
C712	24666470	EL, 47μF, ±20%, 16V
C713	24790100	EL, 10μF, ±20%, 160V
C714	24436101	CD, 100pF
C715	24214472	CD, 4700pF, ±10%, 500V
C716	24436101	CD, 100pF
C717	24214472	CD, 4700pF, ±10%, 500V
C718	24794470	EL, 47μF, ±20%, 16V
C719	24435151	CD, 150pF, 500V
C720	24790100	EL, 10μF, ±20%, 160V
C721	24794470	EL, 47μF, ±20%, 16V
⚠C801	24082927	PF, 0.22μF, AC275V
⚠C802	24082927	PF, 0.22μF, AC275V
⚠C805	24092281	CD, 4700pF, ±20%, AC250V
C806	24092281	CD, 4700pF, ±20%, AC250V
C807	24567474	PF, 0.47μF
C808	24667331	EL, 330μF, ±20%, 25V
C809	24214471	CD, 470pF, ±10%, 500V
C810	24086873	EL, 330μF, ±20%, 400V
⚠C813	24092557	CD, 2200pF, ±20%, AC250V
⚠C814	24092557	CD, 2200pF, ±20%, AC250V
C816	24669221	EL, 220μF, ±20%, 50V
C817	24092341	CD, 470pF, ±10%, 2kV
C818	24095931	PF, 2200pF, 1250V
C819	24676220	EL, 22μF, ±20%, 100V
C820	24092343	CD, 680pF, ±10%, 2kV
C821	24214471	CD, 470pF, ±10%, 500V
C829	24590182	PF, 1800pF
C831	24794470	EL, 47μF, ±20%, 16V
C832	24794470	EL, 47μF, ±20%, 16V
C833	24669100	EL, 10μF, ±20%, 50V
C834	24797100	EL, 10μF, ±20%, 50V
C835	24794470	EL, 47μF, ±20%, 16V
C841	24669100	EL, 10μF, ±20%, 50V
C842	24669100	EL, 10μF, ±20%, 50V
C843	24590104	PF, 0.1μF
C846	24590104	PF, 0.1μF
C884	24086916	EL, 330μF, ±20%, 160V
C885	24214471	CD, 470pF, ±10%, 500V
C887	24214471	CD, 470pF, ±10%, 500V
C889	24668222	EL, 2200μF, ±20%, 35V
C892	24667222	EL, 2200μF, ±20%, 25V
C893	24092337	CD, 220pF, ±10%, 2kV
C895	24669470	EL, 47μF, ±20%, 50V
C896	24214471	CD, 470pF, ±10%, 500V
C897	24666332	EL, 3300μF, ±20%, 16V
C898	24590153	PF, 0.015μF
C899	24214471	CD, 470pF, ±10%, 500V
C902	24092353	CD, 4700pF, ±10%, 2kV
C904	24436471	CD, 470pF

Location No.	Part No.	Description
C905	24436471	CD, 470pF
C907	24436471	CD, 470pF
C909	24679220	EL, 22μF, ±20%, 250V
C910	24797478	EL, 0.47μF, ±20%, 50V
C911	24203100	EL, 10μF, ±20%, 16V
C912	24794102	EL, 1000μF, ±20%, 16V
C913	24763102	EL, 1000μF, ±20%, 16V
C914	24212103	CD, 0.01μF, ±10%
C915	24092398	CD, 0.1μF, +80%,-20%
C920	24591104	PF, 0.1μF
C921	24591104	PF, 0.1μF
C930	24214101	CD, 100pF, ±10%, 500V
C931	24214101	CD, 100pF, ±10%, 500V
C4031	24591562	PF, 5600pF
C4041	24797229	EL, 2.2μF, ±20%, 50V
C4301	24797010	EL, 1μF, ±20%, 50V
C4303	24591433	PF, 0.043μF
C4304	24591153	PF, 0.015μF
C4305	24794101	EL, 100μF, ±20%, 16V
C4306	24232103	CD, 0.01μF, +80%, -20%
C4307	24232103	CD, 0.01μF, +80%, -20%
C4311	24794471	EL, 470μF, ±20%, 16V
C4401	24232103	CD, 0.01μF, +80%, -20%
C4402	24232103	CD, 0.01μF, +80%, -20%
C4403	24501561	PF, 560pF
C4404	24501132	PF, 1300pF
C4405	24797479	EL, 4.7μF, ±20%, 50V
C4406	24232103	CD, 0.01μF, +80%, -20%
C4408	24766229	EL, 2.2μF, ±20%, 50V
C4412	24501132	PF, 1300pF
C4413	24501102	PF, 1000pF
C4414	24232103	CD, 0.01μF, +80%, -20%
C4415	24567474	PF, 0.47μF
C4416	24501161	PF, 160pF
C4417	24590332	PF, 3300pF
C4421	24353330	CD, 33pF
CA13	24212101	CD, 100pF, ±10%
CA30	24212101	CD, 100pF, ±10%
CA33	24232103	CD, 0.01μF, +80%, -20%
CA37	24212101	CD, 100pF, ±10%
CA38	24212101	CD, 100pF, ±10%
CA42	24794100	EL, 10μF, ±20%, 16V
CA43	24232103	CD, 0.01μF, +80%, -20%
CA44	24232103	CD, 0.01μF, +80%, -20%
CA68	24794100	EL, 10μF, ±20%, 16V
CA69	24232103	CD, 0.01μF, +80%, -20%
CB01	24794470	EL, 47μF, ±20%, 16V
CC10	24474101	CD, 100pF, ±10%
CC20	24212102	CD, 1000pF, ±10%
CC21	24436470	CD, 47pF
CC22	24436470	CD, 47pF
CF03	24567104	PF, 0.1μF
CF04	24766101	PF, 0.1μF
CF05	24766101	PF, 0.1μF
CF06	24353220	CD, 22pF
CF07	24353220	CD, 22pF
CF08	24567104	PF, 0.1μF
CF09	24567104	PF, 0.1μF
CF10	24206100	EL, 10μF, 50V
CF11	24567104	PF, 0.1μF
CF12	24232103	CD, 0.01μF, +80%, -20%
CF14	24232103	CD, 0.01μF, +80%, -20%
CG01	24591124	PF, 0.12μF
CG02	24567104	PF, 0.1μF

Location No.	Part No.	Description
CG03	24590823	PF, 0.082μF
CG04	24669010	EL, 1μF, ±20%, 50V
CG05	24666220	EL, 22μF, ±20%, 16V
CG07	24669010	EL, 1μF, ±20%, 50V
CG08	24669010	EL, 1μF, ±20%, 50V
CG09	24669010	EL, 1μF, ±20%, 50V
CG12	24591273	PF, 0.027μF (2876DD)
CG13	24232103	CD, 0.01μF, +80%, -20%
CG14	24666101	EL, 100μF, ±20%, 16V
CG15	24591822	PF, 8200pF (2876DD)
CG16	24669010	EL, 1μF, ±20%, 50V (2876DD)
CG17	24591273	PF, 0.027μF (2876DD)
CG18	24591822	PF, 8200pF (2876DD)
CG24	24669100	EL, 10μF, ±20%, 50V
CG25	24212102	CD, 1000pF, ±10%
CG26	24669100	EL, 10μF, ±20%, 50V
CG27	24669229	EL, 2.2μF, ±20%, 50V(2876DD)
CG28	24669229	EL, 2.2μF, ±20%, 50V(2876DD)
CG29	24232103	CD, 0.01μF, +80%, -20%
CG30	24232103	CD, 0.01μF, +80%, -20%
CQ02	24353820	CD, 82pF
CQ03	24212102	CD, 1000pF, ±10%
CQ04	24794100	EL, 10μF, ±20%, 16V
CQ05	24590563	PF, 0.056μF
CQ07	24590203	PF, 0.02μF
CQ08	24590683	PF, 0.068μF
CQ09	24797229	EL, 2.2μF, ±20%, 50V
CQ10	24590223	PF, 0.022μF
CQ11	24797229	EL, 2.2μF, ±20%, 50V
CQ12	24436910	CD, 91pF
CQ13	24797010	EL, 1μF, ±20%, 50V
CQ14	24797010	EL, 1μF, ±20%, 50V
CQ15	24794101	EL, 100μF, ±20%, 16V
CQ16	24232103	CD, 0.01μF, +80%, -20%
CQ17	24353150	CD, 15pF
CQ18	24436910	CD, 91pF
CQ19	24590103	PF, 0.01μF
CQ20	24590104	PF, 0.1μF
CQ21	24794470	EL, 47μF, ±20%, 16V
CQ22	24232103	CD, 0.01μF, +80%, -20%
CQ23	24590104	PF, 0.1μF
CQ24	24590104	PF, 0.1μF
CQ25	24797100	EL, 10μF, ±20%, 50V
CQ26	24590104	PF, 0.1μF
CQ27	24590104	PF, 0.1μF
CQ28	24797478	EL, 0.47μF, ±20%, 50V
CQ29	24794101	EL, 100μF, ±20%, 16V
CQ30	24232103	CD, 0.01μF, +80%, -20%
CQ31	24797478	EL, 0.47μF, ±20%, 50V
CQ32	24590103	PF, 0.01μF
CQ33	24590104	PF, 0.1μF
CQ34	24590104	PF, 0.1μF
CQ35	24206478	EL, 0.47μF, 50V
CQ36	24206478	EL, 0.47μF, 50V
CQ37	24797010	EL, 1μF, ±20%, 50V
CQ38	24797010	EL, 1μF, ±20%, 50V
CQ39	24797010	EL, 1μF, ±20%, 50V
CQ40	24436910	CD, 91pF
CQ45	24212102	CD, 1000pF, ±10%
CQ46	24212102	CD, 1000pF, ±10%
CR12	24538104	PF, 0.1μF
CR13	24538104	PF, 0.1μF
CR14	24538104	PF, 0.1μF
CR21	24232103	CD, 0.01μF, +80%, -20%

Location No.	Part No.	Description
CR22	24203470	EL, 47μF, ±20%, 16V
CR23	24794101	EL, 100μF, ±20%, 16V
CR24	24794101	EL, 100μF, ±20%, 16V
CR25	24794101	EL, 100μF, ±20%, 16V
CR26	24591223	PF, 0.022μF
CR27	24591223	PF, 0.022μF
CR28	24591223	PF, 0.022μF
CR29	24794100	EL, 10μF, ±20%, 16V
CR30	24591223	PF, 0.022μF
CR31	24797229	EL, 2.2μF, ±20%, 50V
CR32	24591223	PF, 0.022μF
CR33	24232103	CD, 0.01μF, +80%, –20%
CR35	24794470	EL, 47μF, ±20%, 16V
CR36	24232103	CD, 0.01μF, +80%, –20%
CR40	24794470	EL, 47μF, ±20%, 16V
CR41	24232103	CD, 0.01μF, +80%, –20%
CR42	24203101	EL, 100μF, ±20%, 16V
CR43	24794101	EL, 100μF, ±20%, 16V
CR44	24794101	EL, 100μF, ±20%, 16V
CS01	24085944	EL, 2.2μF, ±20%, 50V, Non-Polar
CS02	24085944	EL, 2.2μF, ±20%, 50V, Non-Polar
CS03	24206229	EL, 2.2μF, 50V
CS04	24206229	EL, 2.2μF, 50V
CS05	24206229	EL, 2.2μF, 50V
CS06	24206229	EL, 2.2μF, 50V
CS07	24206229	EL, 2.2μF, 50V
CS08	24206229	EL, 2.2μF, 50V
CS09	24206010	EL, 1μF, 50V
CS12	24474102	CD, 1000pF, ±10%
CS13	24474102	CD, 1000pF, ±10%
CS14	24206100	EL, 10μF, 50V
CS15	24206100	EL, 10μF, 50V
CS17	24666100	EL, 10μF, ±20%, 16V
CS18	24666100	EL, 10μF, ±20%, 16V
CS19	24206478	EL, 0.47μF, 50V
CS22	24666100	EL, 10μF, ±20%, 16V
CS23	24666100	EL, 10μF, ±20%, 16V
CV01	24590103	PF, 0.01μF
CV02	24085970	EL, 10μF, ±20%, 16V, Non-Polar
CV03	24666100	EL, 10μF, ±20%, 16V
CV04	24666100	EL, 10μF, ±20%, 16V
CV05	24232103	CD, 0.01μF, +80%, –20%
CV06	24666100	EL, 10μF, ±20%, 16V
CV07	24232103	CD, 0.01μF, +80%, –20%
CV08	24763102	EL, 1000μF, ±20%, 16V
CV09	24666100	EL, 10μF, ±20%, 16V
CV10	24085970	EL, 10μF, ±20%, 16V, Non-Polar
CV11	24436331	CD, 330pF
CV12	24092398	CD, 0.1μF, +80%,–20%
CV13	24232103	CD, 0.01μF, +80%, –20%
CV14	24474102	CD, 1000pF, ±10%
CV15	24474102	CD, 1000pF, ±10%
CV16	24474102	CD, 1000pF, ±10%
CV17	24474102	CD, 1000pF, ±10%
CV18	24474102	CD, 1000pF, ±10%
CV19	24474102	CD, 1000pF, ±10%
CV20	24353330	CD, 33pF
CV23	24666101	EL, 100μF, ±20%, 16V
CV24	24232103	CD, 0.01μF, +80%, –20%
CV25	24763471	EL, 470μF, ±20%, 16V

Location No.	Part No.	Description
CV34	24474102	CD, 1000pF, ±10%
CV35	24212102	CD, 1000pF, ±10%
CV37	24474102	CD, 1000pF, ±10%
CV39	24666101	EL, 100μF, ±20%, 16V
CV40	24232103	CD, 0.01μF, +80%, –20%
CV42	24085944	EL, 2.2μF, ±20%, 50V, Non-Polar
CV46	24212332	CD, 3300pF, ±10%
CV47	24212332	CD, 3300pF, ±10%
CV48	24212102	CD, 1000pF, ±10%
CV65	24203101	EL, 100μF, ±20%, 16V
CV66	24203101	EL, 100μF, ±20%, 16V
CV67	24763471	EL, 470μF, ±20%, 16V
CV68	24763471	EL, 470μF, ±20%, 16V
CV77	24666100	EL, 10μF, ±20%, 16V
CV80	24232103	CD, 0.01μF, +80%, –20%
CX102	24085939	EL, 4.7μF, ±20%, 25V, Non-Polar
CX103	24092399	EL, 4.7μF, ±20%, 25V
CX104	24092399	EL, 4.7μF, ±20%, 25V
CX105	24105330	Chip, 33pF
CX106	24105680	Chip, 68pF
CX107	24105330	Chip, 33pF
CX108	24092399	EL, 4.7μF, ±20%, 25V
CX109	24085945	EL, 2.2μF, ±20%, 50V, Non-Polar
CX110	24665471	EL, 470μF, 20%, 10v
CX111	24092399	EL, 4.7μF, ±20%, 25V
CX112	24092399	EL, 4.7μF, ±20%, 25V
CX113	24092399	EL, 4.7μF, ±20%, 25V
CX114	24092399	EL, 4.7μF, ±20%, 25V
CX115	24203470	EL, 47μF, ±20%, 16V
CX116	24092399	EL, 4.7μF, ±20%, 25V
CX117	24092399	EL, 4.7μF, ±20%, 25V
CX118	24794101	EL, 100μF, ±20%, 16V
CX119	24092399	EL, 4.7μF, ±20%, 25V
CX120	24105470	CD, 47pF
CX125	24105101	CD, 100pF
CX126	24105271	CD, 270pF
CX127	24092399	EL, 4.7μF, ±20%, 25V
CX128	24085971	EL, 3.3μF, ±20%, NP
CX129	24092399	EL, 4.7μF, ±20%, 25V
CX130	24794101	EL, 100μF, ±20%, 16V
CX131	24092399	EL, 4.7μF, ±20%, 25V
CX132	24794101	EL, 100μF, ±20%, 16V
CX133	24092399	EL, 4.7μF, ±20%, 25V
CX134	24092399	EL, 4.7μF, ±20%, 25V
CX136	24092399	EL, 4.7μF, ±20%, 25V
CX137	24665101	EL, 100μF, ±20%, 10V
CX138	24092399	EL, 4.7μF, ±20%, 25V
CX139	24092399	EL, 4.7μF, ±20%, 25V
CX140	24092399	EL, 4.7μF, ±20%, 25V
CX141	24092399	EL, 4.7μF, ±20%, 25V
CX146	24105470	CD, 47pF
CX147	24105101	CD, 100pF
CX148	24105271	CD, 270pF
CX149	24092399	EL, 4.7μF, ±20%, 25V
CX150	24085971	EL, 3.3μF, ±20%, NP
CX151	24092399	EL, 4.7μF, ±20%, 25V
CX152	24203470	EL, 47μF, ±20%, 16V
CX153	24092399	EL, 4.7μF, ±20%, 25V
CX154	24794101	EL, 100μF, ±20%, 16V
CX155	24092399	EL, 4.7μF, ±20%, 25V
CX156	24092399	EL, 4.7μF, ±20%, 25V

Location No.	Part No.	Description
CX157	24105150	Chip, 15pF
CX158	24105330	Chip, 33pF
CX201	24203470	EL, 47μF, ±20%, 16V
CX202	24092399	EL, 4.7μF, ±20%, 25V
CX203	24092399	EL, 4.7μF, ±20%, 25V
CX204	24203220	EL, 22μF, ±20%, 16V
CX205	24665101	EL, 100μF, ±20%, 10V
CX206	24203101	EL, 100μF, ±20%, 16V
CX207	24665101	EL, 100μF, ±20%, 10V
CX208	24092399	EL, 4.7μF, ±20%, 25V
CX209	24092399	EL, 4.7μF, ±20%, 25V
CX210	24092399	EL, 4.7μF, ±20%, 25V
CX211	24203100	EL, 10μF, ±20%, 16V
CX212	24665101	EL, 100μF, ±20%, 10V
CX220	24092399	EL, 4.7μF, ±20%, 25V
CX221	24092399	EL, 4.7μF, ±20%, 25V
CX222	24092399	EL, 4.7μF, ±20%, 25V
CX223	24092399	EL, 4.7μF, ±20%, 25V
CX224	24092399	EL, 4.7μF, ±20%, 25V
CX226	24092399	EL, 4.7μF, ±20%, 25V
CX227	24092399	EL, 4.7μF, ±20%, 25V
CX228	24092441	Chip, 1μF, +80%,–20%, 16V
CX229	24092441	Chip, 1μF, +80%,–20%, 16V
CX230	24092399	EL, 4.7μF, ±20%, 25V
CX232	24092399	EL, 4.7μF, ±20%, 25V
CX233	24762102	EL, 1000μF, ±20%, 10V
CX234	24762102	EL, 1000μF, ±20%, 10V
CX301	24665101	EL, 100μF, ±20%, 10V
CX302	24092399	EL, 4.7μF, ±20%, 25V
CX303	24665101	EL, 100μF, ±20%, 10V
CX304	24092399	EL, 4.7μF, ±20%, 25V
CX305	24092441	Chip, 1μF, +80%,–20%, 16V
CX306	24105330	Chip, 33pF
CX307	24105330	Chip, 33pF
CX308	24105101	CD, 100pF
CX309	24105680	Chip, 68pF
CX310	24105101	CD, 100pF
CX311	24105680	Chip, 68pF
CX312	24105100	Chip, 10pF
CX313	24105100	Chip, 10pF
CX314	24105100	Chip, 10pF
CX400	24108221	Chip, 220pF
CX401	24108330	Chip, 33pF
CX402	24108330	Chip, 33pF
CX403	24108221	Chip, 220pF
CX404	24108221	Chip, 220pF
CX405	24108221	Chip, 220pF
CX406	24108221	Chip, 220pF
CX407	24109102	Chip, 1000pF, ±10%
CX408	24108221	Chip, 220pF
CX409	24105120	Chip, 12pF
CX410	24105220	Chip, 22pF
CX411	24105220	Chip, 22pF
CX412	24105220	Chip, 22pF
CX413	24105220	Chip, 22pF
CX414	24105220	Chip, 22pF
CX415	24108221	Chip, 220pF
CX801	24763471	EL, 470μF, ±20%, 16V
CX802	24092399	EL, 4.7μF, ±20%, 25V
CX803	24665471	EL, 470μF, 20%, 10v
CX804	24092399	EL, 4.7μF, ±20%, 25V
CX805	24092399	EL, 4.7μF, ±20%, 25V
CX806	24092399	EL, 4.7μF, ±20%, 25V
CZ08	24203100	EL, 10μF, ±20%, 16V

Location No.	Part No.	Description
CZ09	24436220	CD, 22pF
CZ10	24473180	CD, 18pF
CZ11	24473100	CD, 10pF
CZ12	24232103	CD, 0.01μF, +80%, –20%
CZ13	24092398	CD, 0.1μF, +80%,–20%
CZ14	24617816	EL, 10μF, ±20%, 50V
CZ15	24232103	CD, 0.01μF, +80%, –20%
CZ16	24206478	EL, 0.47μF, 50V
CZ17	24232103	CD, 0.01μF, +80%, –20%
CZ19	24436181	CD, 180pF
CZ20	24538103	PF, 0.01μF
CZ21	24436390	CD, 39pF
CZ22	24617816	EL, 10μF, ±20%, 50V
CZ23	24092398	CD, 0.1μF, +80%,–20%
CZ24	24092398	CD, 0.1μF, +80%,–20%
CZ25	24203101	EL, 100μF, ±20%, 16V
CZ26	24232103	CD, 0.01μF, +80%, –20%
CZ28	24232103	CD, 0.01μF, +80%, –20%
CZ29	24092398	CD, 0.1μF, +80%,–20%
CZ30	24617816	EL, 10μF, ±20%, 50V
CZ32	24436120	CD, 12pF
CZ33	24436120	CD, 12pF
CZ34	24473120	CD, 12pF
CZ35	24473120	CD, 12pF
CZ37	24092398	CD, 0.1μF, +80%,–20%
CZ38	24092398	CD, 0.1μF, +80%,–20%
CZ45	24436100	CD, 10pF, ±0.25pF
CZ48	24203470	EL, 47μF, ±20%, 16V
RESISTORS		
R101	24382223	OMF, 22k ohm, 1W
R201	24366681	CF, 680 ohm
R202	24366821	CF, 820 ohm
R203	24366100	CF, 10 ohm
R204	24366104	CF, 100k ohm
R205	24366101	CF, 100 ohm
R206	24366222	CF, 2200 ohm
R207	24366101	CF, 100 ohm
R208	24366103	CF, 10k ohm
R208	24366101	CF, 100 ohm
R209	24366103	CF, 10k ohm
R209	24366101	CF, 100 ohm
R211	24366563	CF, 56k ohm
R215	24366102	CF, 1k ohm
R216	24366103	CF, 10k ohm
R217	24366332	CF, 3300 ohm
R217	24366101	CF, 100 ohm
R218	24366513	CF, 51k ohm
R220	24366102	CF, 1k ohm
R221	24366102	CF, 1k ohm
R223	24366102	CF, 1k ohm
R226	24366101	CF, 100 ohm
R227	24367223	CF, 22k ohm, ±2%
R229	24366472	CF, 4700 ohm
R232	24366103	CF, 10k ohm
R233	24366104	CF, 100k ohm
R234	24366271	CF, 270 ohm
R235	24366472	CF, 4700 ohm
R236	24366102	CF, 1k ohm
R237	24366103	CF, 10k ohm
R299	24366103	CF, 10k ohm
R303	24321109	MF, 1 ohm, 1/2W
R304	24366153	CF, 15k ohm
R305	24322129	MF, 1.2 ohm, 1W

Location No.	Part No.	Description
R306	24366222	CF, 2200 ohm
R307	24366621	CF, 620 ohm
R308	24366472	CF, 4700 ohm
R309	24366333	CF, 33k ohm
R310	24366102	CF, 1k ohm
R312	24366163	CF, 16k ohm
R313	24366303	CF, 30k ohm
R314	24366105	CF, 1M ohm
R315	24366684	CF, 680k ohm
R316	24366154	CF, 150k ohm
R317	24366472	CF, 4700 ohm
R318	24366471	CF, 470 ohm
R319	24366471	CF, 470 ohm
R320	24366101	CF, 100 ohm
R321	24366103	CF, 10k ohm
R322	24366102	CF, 1k ohm
R323	24366103	CF, 10k ohm
R324	24366122	CF, 1200 ohm
R325	24366103	CF, 10k ohm
R325	24366103	CF, 10k ohm
R327	24339339	MF, 3.3 ohm, 2W
R328	24366102	CF, 1k ohm
R329	24366103	CF, 10k ohm
R330	24366113	CF, 11k ohm
R331	24366104	CF, 100k ohm
R336	24383271	OMF, 270 ohm, 2W
R341	24366822	CF, 8200 ohm
R343	24366153	CF, 15k ohm
R344	24383821	OMF, 820 ohm, 2W
R360	24366103	CF, 10k ohm
R370	24322159	OMF, 1.5 ohm, 1W
R371	24366562	CF, 5600 ohm
R372	24366392	CF, 3900 ohm
R373	24366182	CF, 1800 ohm
R374	24366153	CF, 15k ohm
R399	24366684	CF, 680k ohm
R401	24366391	CF, 390 ohm
R402	24366103	CF, 10k ohm
R403	24366242	CF, 2400 ohm
R405	24553682	OMF, 6800 ohm, 1W
R407	24366103	CF, 10k ohm
R411	24366560	CF, 56 ohm
R414	24383220	OMF, 22 ohm, 2W
R415	24553561	OMF, 560 ohm, 1W
R416	24381563	OMF, 56k ohm, 1/2W
R417	24510101	Cement, 100 ohm, 5W
R424	24366152	CF, 1500 ohm
R425	24366182	CF, 1800 ohm
R426	24366751	CF, 750 ohm
R427	24366392	CF, 3900 ohm
R428	24366561	CF, 560 ohm
R429	24552560	OMF, 56 ohm, 1/2W
R441	24383561	OMF, 560 ohm, 2W
R460	24552332	OMF, 3300 ohm, 1/2W
R461	24552182	OMF, 1800 ohm, 1/2W
R463	24323229	MF, 2.2 ohm, 2W
R464	24366273	CF, 27k ohm
R465	24366114	CF, 110k ohm
R466	24366562	CF, 5600 ohm
R469	24531150	FR, 15 ohm, 1/2W
R470	24339568	OMF, 0.56 ohm, 2W
R471	24531271	FR, 270 ohm, 1/2W
R473	24366473	CF, 47k ohm
R474	24366473	CF, 47k ohm

Location No.	Part No.	Description
R478	24376333	CF, 33k ohm, 1/2W
R479	24531680	FR, 68 ohm, 1/2W
R480	24552222	OMF, 2200 ohm, 1/2W
R481	24366223	CF, 22k ohm
R482	24366103	CF, 10k ohm
R487	24366474	CF, 470k ohm
R488	24366154	CF, 150k ohm
R490	24366101	CF, 100 ohm
R491	24366101	CF, 100 ohm
R492	24366272	CF, 2700 ohm
R499	24366182	CF, 1800 ohm
R501	24366223	CF, 22k ohm
R502	24366101	CF, 100 ohm
R503	24366101	CF, 100 ohm
R505	24366102	CF, 1k ohm
R506	24366103	CF, 10k ohm
R508	24366102	CF, 1k ohm
R509	24366102	CF, 1k ohm
R510	24366102	CF, 1k ohm
R511	24366101	CF, 100 ohm
R512	24366101	CF, 100 ohm
R513	24366472	CF, 4700 ohm
R514	24366472	CF, 4700 ohm
R518	24366472	CF, 4700 ohm
R519	24366101	CF, 100 ohm
R520	24366103	CF, 10k ohm
R521	24366223	CF, 22k ohm
R522	24366473	CF, 47k ohm
R609	24366563	CF, 56k ohm
R610	24366103	CF, 10k ohm
R611	24366103	CF, 10k ohm
R612	24366103	CF, 10k ohm
R661	24552221	OMF, 220 ohm, 1/2W
R662	24552221	OMF, 220 ohm, 1/2W
R670	24366272	CF, 2700 ohm
R671	24366392	CF, 3900 ohm
R672	24366272	CF, 2700 ohm
R673	24366392	CF, 3900 ohm
R674	24366332	CF, 3300 ohm
R675	24366392	CF, 3900 ohm (2876DD)
R675	24366472	CF, 4700 ohm (2876DF)
R676	24366223	CF, 22k ohm
R676	24366223	CF, 22k ohm
R677	24366223	CF, 22k ohm
R677	24366223	CF, 22k ohm
R678	24366223	CF, 22k ohm
R679	24366223	CF, 22k ohm
R680	24366223	CF, 22k ohm
R680	24366473	CF, 47k ohm
R681	24366223	CF, 22k ohm
R682	24366104	CF, 100k ohm
R683	24366273	CF, 27k ohm
R684	24366229	CF, 2.2 ohm
R685	24366229	CF, 2.2 ohm
R686	24366229	CF, 2.2 ohm
R688	24366222	CF, 2200 ohm
R690	24366681	CF, 680 ohm
R691	24366681	CF, 680 ohm
R692	24366681	CF, 680 ohm
R693	24366681	CF, 680 ohm
R702	24552221	OMF, 220 ohm, 1/2W
R712	24366101	CF, 100 ohm
R715	24366393	CF, 39k ohm
R716	24366273	CF, 27k ohm

Location No.	Part No.	Description
R717	24366333	CF, 33k ohm
R718	24366102	CF, 1k ohm
R722	24552471	OMF, 470 ohm, 1/2W
R723	24366151	CF, 150 ohm
R724	24366121	CF, 120 ohm
R725	24366182	CF, 1800 ohm
R730	24552100	OMF, 10 ohm, 1/2W
R731	24553331	OMF, 330 ohm, 1W
R732	24366220	CF, 22 ohm
R733	24366683	CF, 68k ohm
R734	24366220	CF, 22 ohm
R735	24366683	CF, 68k ohm
R736	24366560	CF, 56 ohm
R737	24366152	CF, 1500 ohm
R738	24366123	CF, 12k ohm
R739	24366152	CF, 1500 ohm
R740	24366560	CF, 56 ohm
R741	24366279	CF, 2.7 ohm
R742	24366279	CF, 2.7 ohm
R743	24554101	OMF, 100 ohm, 2W
R744	24366122	CF, 1200 ohm
R745	24366122	CF, 1200 ohm
R801	24009954	Metal-Glazed Resistor, 2.2M ohm, 1/2W
R802	24321568	MF, 0.56 ohm, 1/2W
R803	24382683	OMF, 68k ohm, 1W
R805	24552101	OMF, 100 ohm, 1/2W
R806	24552392	OMF, 3900 ohm, 1/2W
R808	24019340	PTC Thermistor, 18 ohm, 290V
R810	24007492	Cement, 2.2 ohm, 20W
R811	24568271	Cement, 270 ohm, 7W
R814	24366122	CF, 1200 ohm
R815	24552102	OMF, 1k ohm, 1/2W
R816	24323759	OMF, 7.5 ohm, 2W
R818	24322228	MF, 0.22 ohm, 1W
R819	24321279	MF, 2.7 ohm, 1/2W
R821	24366101	CF, 100 ohm
R822	24552103	OMF, 10k ohm, 1/2W
R823	24366272	CF, 2700 ohm
R824	24569101	Cement, 100 ohm, 10W
R825	24569100	Cement, 10 ohm, 10W
R827	24366681	CF, 680 ohm
R828	24366821	CF, 820 ohm
R829	24322228	MF, 0.22 ohm, 1W
R830	24366471	CF, 470 ohm
R831	24366471	CF, 470 ohm
R832	24366472	CF, 4700 ohm
R833	24366222	CF, 2200 ohm
R841	24531120	FR, 12 ohm, 1/2W
R842	24552392	OMF, 3900 ohm, 1/2W
R846	24366561	CF, 560 ohm
R847	24366472	CF, 4700 ohm
R890	24553333	OMF, 33k ohm, 1W
⚠R899	24005007	Metal-Glazed Resistor, 8.2M ohm, 1W
R901	24376821	CF, 820 ohm, 1/2W
R902	24376821	CF, 820 ohm, 1/2W
R903	24376821	CF, 820 ohm, 1/2W
R904	24366472	CF, 4700 ohm
R905	24366150	CF, 15 ohm
R906	24366102	CF, 1k ohm
R907	24366102	CF, 1k ohm
R908	24366102	CF, 1k ohm

Location No.	Part No.	Description
R909	24366222	CF, 2200 ohm
R914	24366101	CF, 100 ohm
R915	24366101	CF, 100 ohm
R916	24366330	CF, 33 ohm
R917	24366181	CF, 180 ohm
R918	24366100	CF, 10 ohm
R920	24000568	FR, 4.7 ohm, 1W
R921	24366101	CF, 100 ohm
R922	24366101	CF, 100 ohm
R924	24366100	CF, 10 ohm
R925	24366181	CF, 180 ohm
R928	24366101	CF, 100 ohm
R929	24366101	CF, 100 ohm
R930	24366100	CF, 10 ohm
R932	24366332	CF, 3300 ohm
R933	24366750	CF, 75 ohm
R934	24366391	CF, 390 ohm
R935	24366821	CF, 820 ohm
R936	24366750	CF, 75 ohm
R937	24366181	CF, 180 ohm
R939	24366101	CF, 100 ohm
R942	24366392	CF, 3900 ohm
R943	24366392	CF, 3900 ohm
R944	24366392	CF, 3900 ohm
R945	24366330	CF, 33 ohm
R946	24366330	CF, 33 ohm
R960	24383153	OMF, 15k ohm, 2W
R961	24383153	OMF, 15k ohm, 2W
R962	24383153	OMF, 15k ohm, 2W
R963	24383153	OMF, 15k ohm, 2W
R964	24383153	OMF, 15k ohm, 2W
R965	24383153	OMF, 15k ohm, 2W
R966	24383153	OMF, 15k ohm, 2W
R967	24383153	OMF, 15k ohm, 2W
R968	24383153	OMF, 15k ohm, 2W
R969	24366101	CF, 100 ohm
R970	24366101	CF, 100 ohm
R971	24366101	CF, 100 ohm
R977	24366681	CF, 680 ohm
R980	24366471	CF, 470 ohm
R981	24366821	CF, 820 ohm
R982	24366103	CF, 10k ohm
R983	24366222	CF, 2200 ohm
R984	24366152	CF, 1500 ohm
R985	24366471	CF, 470 ohm
R986	24366681	CF, 680 ohm
R987	24366681	CF, 680 ohm
R988	24366472	CF, 4700 ohm
R989	24366332	CF, 3300 ohm
R990	24366222	CF, 2200 ohm
R991	24366681	CF, 680 ohm
R992	24366150	CF, 15 ohm
R4034	24366332	CF, 3300 ohm
R4301	24366222	CF, 2200 ohm
R4302	24366103	CF, 10k ohm
R4303	24019090	MF, 330k ohm, ±1%, 1/4W
R4305	24366471	CF, 470 ohm
R4306	24366472	CF, 4700 ohm
R4350	24066873	VR, 100k ohm, 0.3W
R4401	24366103	CF, 10k ohm
R4402	24366222	CF, 2200 ohm
R4403	24000639	MF, 22k ohm, ±1%, 1/4W
R4404	24000364	MF, 1800 ohm, ±1%, 1/4W
R4405	24000247	MF, 39k ohm, ±1%, 1/4W

Location No.	Part No.	Description
R4406	24000220	MF, 390 ohm, ±1%, 1/4W
R4408	24000637	MF, 15k ohm, ±1%, 1/4W
R4409	24000361	MF, 1300 ohm, ±1%, 1/4W
R4410	24552470	OMF, 47 ohm, 1/2W
R4411	24366472	CF, 4700 ohm
R4412	24366103	CF, 10k ohm
R4413	24366751	CF, 750 ohm
R4420	24000639	MF, 22k ohm, ±1%, 1/4W
R4421	24366103	CF, 10k ohm
R4422	24366473	CF, 47k ohm
R4423	24366223	CF, 22k ohm
R4424	24366103	CF, 10k ohm
R4450	24066878	VR, 2k ohm, 0.3W
RA04	24366102	CF, 1k ohm
RA05	24366102	CF, 1k ohm
RA07	24366102	CF, 1k ohm
RA08	24366102	CF, 1k ohm
RA09	24366102	CF, 1k ohm
RA10	24366102	CF, 1k ohm
RA11	24366102	CF, 1k ohm
RA12	24366473	CF, 47k ohm
RA13	24366153	CF, 15k ohm
RA16	24366102	CF, 1k ohm
RA17	24366102	CF, 1k ohm
RA18	24366102	CF, 1k ohm
RA27	24366102	CF, 1k ohm
RA33	24366102	CF, 1k ohm
RA35	24366102	CF, 1k ohm
RA36	24366472	CF, 4700 ohm
RA37	24366101	CF, 100 ohm
RA38	24366101	CF, 100 ohm
RA49	24366470	CF, 47 ohm
RA61	24366103	CF, 10k ohm
RA62	24366103	CF, 10k ohm
RA63	24366103	CF, 10k ohm
RA64	24366103	CF, 10k ohm
RA67	24366472	CF, 4700 ohm
RA68	24366472	CF, 4700 ohm
RA70	24366333	CF, 33k ohm
RA71	24366683	CF, 68k ohm
RA72	24366223	CF, 22k ohm
RA73	24366103	CF, 10k ohm
RA74	24366103	CF, 10k ohm
RA75	24366333	CF, 33k ohm
RA76	24366103	CF, 10k ohm
RA77	24366472	CF, 4700 ohm
RA78	24366472	CF, 4700 ohm
RA79	24366103	CF, 10k ohm
RB01	24366271	CF, 270 ohm
RB02	24366271	CF, 270 ohm
RB09	24366470	CF, 47 ohm
RB10	24366101	CF, 100 ohm
RB11	24366103	CF, 10k ohm
RB30	24366103	CF, 10k ohm
RB40	24366103	CF, 10k ohm
RB41	24366182	CF, 1800 ohm
RB42	24366102	CF, 1k ohm
RB43	24366103	CF, 10k ohm
RB44	24366103	CF, 10k ohm
RB45	24366101	CF, 100 ohm
RF01	24366222	CF, 2200 ohm
RF03	24366472	CF, 4700 ohm
RF04	24366472	CF, 4700 ohm
RF06	24366102	CF, 1k ohm

Location No.	Part No.	Description
RF08	24366100	CF, 10 ohm
RF09	24366100	CF, 10 ohm
RF10	24366100	CF, 10 ohm
RF11	24366103	CF, 10k ohm
RF12	24366101	CF, 100 ohm
RF13	24366101	CF, 100 ohm
RF14	24366101	CF, 100 ohm
RF15	24366103	CF, 10k ohm
RF16	24366471	CF, 470 ohm
RF20	24366472	CF, 4700 ohm
RF21	24366102	CF, 1k ohm
RF22	24366102	CF, 1k ohm
RF26	24366102	CF, 1k ohm
RG01	24366223	CF, 22k ohm
RG02	24366223	CF, 22k ohm
RG03	24366101	CF, 100 ohm
RG04	24366101	CF, 100 ohm
RG05	24366101	CF, 100 ohm
RG07	24366101	CF, 100 ohm (2876DD)
RG08	24366101	CF, 100 ohm (2876DD)
RG09	24366103	CF, 10k ohm (2876DD)
RG10	24366103	CF, 10k ohm (2876DD)
RG11	24366103	CF, 10k ohm (2876DD)
RG12	24366103	CF, 10k ohm (2876DD)
RQ01	24366102	CF, 1k ohm
RQ03	24366102	CF, 1k ohm
RQ04	24366511	CF, 510 ohm
RQ05	24366471	CF, 470 ohm
RQ06	24366471	CF, 470 ohm
RQ07	24366103	CF, 10k ohm
RQ08	24366102	CF, 1k ohm
RQ09	24366102	CF, 1k ohm
RQ10	24366102	CF, 1k ohm
RQ11	24366561	CF, 560 ohm
RQ12	24366561	CF, 560 ohm
RQ13	24366203	CF, 20k ohm
RQ14	24366273	CF, 27k ohm
RQ20	24366563	CF, 56k ohm
RR12	24366151	CF, 150 ohm
RR13	24366151	CF, 150 ohm
RR14	24366151	CF, 150 ohm
RR21	24366102	CF, 1k ohm
RR22	24366102	CF, 1k ohm
RR23	24366562	CF, 5600 ohm
RR24	24366332	CF, 3300 ohm
RR25	24366302	CF, 3k ohm
RR27	24366162	CF, 1600 ohm
RR29	24366101	CF, 100 ohm
RR30	24366101	CF, 100 ohm
RR33	24366101	CF, 100 ohm
RR34	24366102	CF, 1k ohm
RR35	24366102	CF, 1k ohm
RR36	24366103	CF, 10k ohm
RR38	24366222	CF, 2200 ohm
RR39	24366222	CF, 2200 ohm
RR40	24366471	CF, 470 ohm
RR41	24366473	CF, 47k ohm
RR42	24366101	CF, 100 ohm
RR43	24366101	CF, 100 ohm
RR44	24366101	CF, 100 ohm
RR50	24366101	CF, 100 ohm
RR51	24366101	CF, 100 ohm
RR52	24366101	CF, 100 ohm
RR60	24366472	CF, 4700 ohm

Location No.	Part No.	Description
RR61	24366392	CF, 3900 ohm
RR62	24366302	CF, 3k ohm
RR63	24366102	CF, 1k ohm
RR64	24366162	CF, 1600 ohm
RR65	24366102	CF, 1k ohm
RR66	24366101	CF, 100 ohm
RR67	24366101	CF, 100 ohm
RS01	24366681	CF, 680 ohm
RS02	24366681	CF, 680 ohm
RS03	24366101	CF, 100 ohm
RS04	24366101	CF, 100 ohm
RS05	24366472	CF, 4700 ohm
RS06	24366472	CF, 4700 ohm
RS07	24366472	CF, 4700 ohm
RS08	24366472	CF, 4700 ohm
RS09	24366472	CF, 4700 ohm
RS10	24366472	CF, 4700 ohm
RS11	24366101	CF, 100 ohm
RS13	24366101	CF, 100 ohm
RS14	24366101	CF, 100 ohm
RS15	24366104	CF, 100k ohm
RS16	24366104	CF, 100k ohm
RS17	24366223	CF, 22k ohm
RS18	24366223	CF, 22k ohm
RS19	24366102	CF, 1k ohm
RS20	24366102	CF, 1k ohm
RS21	24366222	CF, 2200 ohm
RS22	24366222	CF, 2200 ohm
RS23	24366101	CF, 100 ohm
RS24	24366101	CF, 100 ohm
RS27	24366104	CF, 100k ohm
RS28	24366104	CF, 100k ohm
RS29	24366223	CF, 22k ohm
RS30	24366223	CF, 22k ohm
RS31	24366103	CF, 10k ohm
RS32	24366104	CF, 100k ohm
RS35	24366223	CF, 22k ohm
RS36	24366223	CF, 22k ohm
RS37	24366104	CF, 100k ohm
RS38	24366104	CF, 100k ohm
RS43	24366681	CF, 680 ohm
RS44	24366681	CF, 680 ohm
RS45	24366681	CF, 680 ohm
RS46	24366681	CF, 680 ohm
RV01	24366101	CF, 100 ohm
RV02	24366101	CF, 100 ohm
RV03	24366101	CF, 100 ohm
RV04	24366101	CF, 100 ohm
RV05	24366101	CF, 100 ohm
RV06	24366101	CF, 100 ohm
RV07	24366162	CF, 1600 ohm
RV08	24366162	CF, 1600 ohm
RV09	24366101	CF, 100 ohm
RV10	24366101	CF, 100 ohm
RV12	24366681	CF, 680 ohm
RV13	24366681	CF, 680 ohm
RV16	24366471	CF, 470 ohm
RV18	24366123	CF, 12k ohm
RV19	24366101	CF, 100 ohm
RV22	24366102	CF, 1k ohm
RV23	24552101	OMF, 100 ohm, 1/2W
RV25	24366101	CF, 100 ohm
RV26	24366181	CF, 180 ohm
RV27	24366750	CF, 75 ohm

Location No.	Part No.	Description
RV28	24366683	CF, 68k ohm
RV29	24366273	CF, 27k ohm
RV30	24366750	CF, 75 ohm
RV32	24366750	CF, 75 ohm
RV33	24366123	CF, 12k ohm
RV34	24366123	CF, 12k ohm
RV35	24366103	CF, 10k ohm
RV36	24366101	CF, 100 ohm
RV38	24366750	CF, 75 ohm
RV40	24366471	CF, 470 ohm
RV41	24366104	CF, 100k ohm
RV42	24366471	CF, 470 ohm
RV43	24366471	CF, 470 ohm
RV44	24366471	CF, 470 ohm
RV45	24366100	CF, 10 ohm
RV46	24366112	CF, 1100 ohm
RV47	24366102	CF, 1k ohm
RV48	24366102	CF, 1k ohm
RV49	24366102	CF, 1k ohm
RV60	24366471	CF, 470 ohm
RV61	24552101	OMF, 100 ohm, 1/2W
RV62	24366101	CF, 100 ohm
RV63	24552820	OMF, 82 ohm, 1/2W
RV64	24366750	CF, 75 ohm
RV65	24552101	OMF, 100 ohm, 1/2W
RV66	24366101	CF, 100 ohm
RV67	24552820	OMF, 82 ohm, 1/2W
RV68	24366750	CF, 75 ohm
RV69	24366101	CF, 100 ohm
RV70	24366101	CF, 100 ohm
RV71	24366472	CF, 4700 ohm
RV75	24366332	CF, 3300 ohm
RV76	24366220	CF, 22 ohm
RV77	24366182	CF, 1800 ohm
RV78	24366221	CF, 220 ohm
RV79	24366680	CF, 68 ohm
RV80	24366102	CF, 1k ohm
RV81	24366472	CF, 4700 ohm
RV81	24366750	CF, 75 ohm
RV82	24366153	CF, 15k ohm
RV83	24366103	CF, 10k ohm
RV85	24366750	CF, 75 ohm
RV86	24366750	CF, 75 ohm
RV87	24366750	CF, 75 ohm
RV89	24366750	CF, 75 ohm
RV90	24366681	CF, 680 ohm
RV91	24366681	CF, 680 ohm
RV92	24366100	CF, 10 ohm
RV93	24366104	CF, 100k ohm
RV94	24366103	CF, 10k ohm
RV95	24366222	CF, 2200 ohm
RV96	24366391	CF, 390 ohm
RV97	24366101	CF, 100 ohm
RV98	24366750	CF, 75 ohm
RX103	24871471	Chip, 470 ohm, 1/8W
RX104	24011105	Chip, 1M ohm, 1/20W
RX105	24011271	Chip, 270 ohm, 1/20W
RX106	24011102	Chip, 1k ohm, 1/20W
RX108	24011331	Chip, 330 ohm, 1/20W
RX109	24871221	Chip, 220 ohm, 1/8W
RX110	24011680	Chip, 68 ohm, 1/20W
RX111	24011561	Chip, 560 ohm, 1/20W
RX112	24871221	Chip, 220 ohm, 1/8W
RX120	24011470	Chip, 47 ohm, 1/20W

Location No.	Part No.	Description
RX121	24011152	Chip, 1500 ohm, 1/20W
RX123	24011331	Chip, 330 ohm, 1/20W
RX125	24011102	Chip, 1k ohm, 1/20W
RX126	24871471	Chip, 470 ohm, 1/8W
RX127	24011471	Chip, 470 ohm, 1/20W
RX128	24871471	Chip, 470 ohm, 1/8W
RX136	24011470	Chip, 47 ohm, 1/20W
RX137	24011152	Chip, 1500 ohm, 1/20W
RX140	24011102	Chip, 1k ohm, 1/20W
RX141	24871471	Chip, 470 ohm, 1/8W
RX142	24011470	Chip, 47 ohm, 1/20W
RX143	24011561	Chip, 560 ohm, 1/20W
RX144	24871221	Chip, 220 ohm, 1/8W
RX145	24011331	Chip, 330 ohm, 1/20W
RX146	24011470	Chip, 47 ohm, 1/20W
RX201	24011103	Chip, 10k ohm, 1/20W
RX202	24011681	Chip, 680 ohm, 1/20W
RX203	24011151	Chip, 150 ohm, 1/20W
RX204	24011472	ChIP, 4700 ohm, 1/20W
RX205	24011332	Chip, 3300 ohm, 1/20W
RX206	24011331	Chip, 330 ohm, 1/20W
RX207	24011102	Chip, 1k ohm, 1/20W
RX208	24011332	Chip, 3300 ohm, 1/20W
RX209	24011681	Chip, 680 ohm, 1/20W
RX223	24011220	Chip, 22 ohm, 1/20W
RX225	24011220	Chip, 22 ohm, 1/20W
RX301	24011151	Chip, 150 ohm, 1/20W
RX301	24011151	Chip, 150 ohm, 1/20W
RX302	24011102	Chip, 1k ohm, 1/20W
RX303	24011220	Chip, 22 ohm, 1/20W
RX304	24871331	Chip, 330 ohm, 1/8W
RX305	24011221	Chip, 220 ohm, 1/20W
RX306	24011821	Chip, 820 ohm, 1/20W
RX307	24011220	Chip, 22 ohm, 1/20W
RX308	24871331	Chip, 330 ohm, 1/8W
RX309	24011221	Chip, 220 ohm, 1/20W
RX310	24011821	Chip, 820 ohm, 1/20W
RX311	24011220	Chip, 22 ohm, 1/20W
RX312	24871331	Chip, 330 ohm, 1/8W
RX313	24871331	Chip, 330 ohm, 1/8W
RX314	24871331	Chip, 330 ohm, 1/8W
RX315	24871471	Chip, 470 ohm, 1/8W
RX400	24011102	Chip, 1k ohm, 1/20W
RX401	24011471	Chip, 470 ohm, 1/20W
RX402	24011471	Chip, 470 ohm, 1/20W
RX403	24011471	Chip, 470 ohm, 1/20W
RX404	24011102	Chip, 1k ohm, 1/20W
RX405	24011221	Chip, 220 ohm, 1/20W
RX406	24011221	Chip, 220 ohm, 1/20W
RX407	24011221	Chip, 220 ohm, 1/20W
RX408	24011221	Chip, 220 ohm, 1/20W
RX409	24011121	Chip, 120 ohm, 1/20W
RZ01	24366471	CF, 470 ohm
RZ02	24366152	CF, 1500 ohm
RZ04	24366332	CF, 3300 ohm
RZ05	24366332	CF, 3300 ohm
RZ06	24366821	CF, 820 ohm
RZ07	24366272	CF, 2700 ohm
RZ08	24366302	CF, 3k ohm
RZ12	24366471	CF, 470 ohm
RZ18	24366821	CF, 820 ohm
RZ19	24366471	CF, 470 ohm
RZ20	24366122	CF, 1200 ohm
RZ21	24366680	CF, 68 ohm

Location No.	Part No.	Description
RZ22	24366101	CF, 100 ohm
RZ23	24366821	CF, 820 ohm
RZ24	24366821	CF, 820 ohm
RZ25	24366101	CF, 100 ohm
RZ26	24366101	CF, 100 ohm
RZ28	24366821	CF, 820 ohm
RZ29	24366331	CF, 330 ohm
RZ30	24366331	CF, 330 ohm
RZ31	24366102	CF, 1k ohm

COILS & TRANSFORMERS

L101	23221803	Coil, Choke, TLN3040D
L201	23238710	Coil, Peaking, TRF4220AJ
L203	23238708	Coil, Peaking, TRF4330AJ
L301	23103859	Coil (Ferrite Bead), TEM2011
L302	23289101	Coil, Peaking, TRF4101AF
L400	23289101	Coil, Peaking, TRF4101AF
L410	23103859	Coil (Ferrite Bead), TEM2011
L441	23233966	Coil, Linearity, TLN2158AY
L442	23248164	Coil, Choke, TLN3437AD
L443	23248165	Coil, Choke, TLN3438AD
L449	23103859	Coil (Ferrite Bead), TEM2011
L461	23248111	Coil, Choke, TLN3349D
L462	----------	Supplied with V901.
L470	23103859	Coil (Ferrite Bead), TEM2011
L491	23211923	Coil, Choke, AT4043/100
L501	23289479	Coil, Peaking, TRF44R7AF
L503	23289470	Coil, Peaking, TRF4470AF
L507	23103824	Coil, TEM2028K
L508	23103824	Coil, TEM2028K
L509	23103824	Coil, TEM2028K
L510	23238718	Coil, Peaking, TRF4479AJ
L676	23238562	Coil, Peaking, TRF4109AJ
L677	23238720	Coil, Peaking, TRF4339AJ
L682	23289109	Coil, Peaking, TRF41R0AF
L683	23289339	Coil, Peaking, TRF43R3AF
L684	23238562	Coil, Peaking, TRF4109AJ
L685	23238562	Coil, Peaking, TRF4109AJ
L701	23289100	Coil, Peaking, TRF4100AF
L702	23261974	Coil, Choke, HC5-035
L704	23103859	Coil (Ferrite Bead), TEM2011
L705	23103859	Coil (Ferrite Bead), TEM2011
L811	23103859	Coil (Ferrite Bead), TEM2011
L814	23221747	Coil, Choke, TRF9253D
L875	23280016	Coil, Peaking, TRF4100AZ
L883	23221747	Coil, Choke, TRF9253D
L885	23248073	Coil, Choke, TLN3299D
L886	23103859	Coil (Ferrite Bead), TEM2011
L889	23280016	Coil, Peaking, TRF4100AZ
L891	23103859	Coil (Ferrite Bead), TEM2011
L892	23103859	Coil (Ferrite Bead), TEM2011
L893	23222694	Coil, Width, TLN2026
L896	23103859	Coil (Ferrite Bead), TEM2011
L897	23222694	Coil, Width, TLN2026
⚠L901	23200276	Coil, Degaussing, TSB-2330BR
L902	23289101	Coil, Peaking, TRF4101AF
L903	23289101	Coil, Peaking, TRF4101AF
L904	23289101	Coil, Peaking, TRF4101AF
L905	23289220	Coil, Peaking, TRF4220AF
L906	23289220	Coil, Peaking, TRF4220AF
L907	23289220	Coil, Peaking, TRF4220AF
L908	23289100	Coil, Peaking, TRF4100AF
L910	23289109	Coil, Peaking, TRF41R0AF
L911	23289101	Coil, Peaking, TRF4101AF

Location No.	Part No.	Description
L912	23289150	Coil, Peaking, TRF4150AF
L913	23289150	Coil, Peaking, TRF4150AF
L914	23289150	Coil, Peaking, TRF4150AF
L4400	23221886	Coil, Choke, TLN3073
L4430	23289680	Coil, Peaking, TRF4680AF
LA01	23289100	Coil, Peaking, TRF4100AF
LC05	23238562	Coil, Peaking, TRF4109AJ
LC06	23103859	Coil (Ferrite Bead), TEM2011
LC07	23238562	Coil, Peaking, TRF4109AJ
LC08	23238562	Coil, Peaking, TRF4109AJ
LC30	23238562	Coil, Peaking, TRF4109AJ
LC31	23238562	Coil, Peaking, TRF4109AJ
LF01	23238506	Coil, Peaking, TRF4229AJ
LF02	23238506	Coil, Peaking, TRF4229AJ
LF03	23238506	Coil, Peaking, TRF4229AJ
LF04	23238506	Coil, Peaking, TRF4229AJ
LF06	23238562	Coil, Peaking, TRF4109AJ
LF07	23238562	Coil, Peaking, TRF4109AJ
LF08	23238714	Coil, Peaking, TRF4100AJ
LF09	23238714	Coil, Peaking, TRF4100AJ
LF10	23238562	Coil, Peaking, TRF4109AJ
LF11	23289109	Coil, Peaking, TRF41R0AF
LF13	23289100	Coil, Peaking, TRF4100AF
LQ01	23238709	Coil, Peaking, TRF4270AJ
LQ02	23238718	Coil, Peaking, TRF4479AJ
LQ03	23238718	Coil, Peaking, TRF4479AJ
LQ04	23238718	Coil, Peaking, TRF4479AJ
LV03	23103824	Coil, TEM2028K
LV06	23289109	Coil, Peaking, TRF41R0AF
LV07	23289109	Coil, Peaking, TRF41R0AF
LV08	23289330	Coil, Peaking, TRF4330AF
LV09	23289100	Coil, Peaking, TRF4100AF
LV42	23289100	Coil, Peaking, TRF4100AF
LV43	23289100	Coil, Peaking, TRF4100AF
LV49	23103824	Coil, TEM2028K
LX101	23103822	Chip (Ferrite Bead), TEM2117T
LX102	23103822	Chip (Ferrite Bead), TEM2117T
LX103	23103822	Chip (Ferrite Bead), TEM2117T
LX104	23237989	Coil, Peaking, TRF4689AC
LX105	23103822	Chip (Ferrite Bead), TEM2117T
LX106	23103822	Chip (Ferrite Bead), TEM2117T
LX107	23289270	Coil, Peaking, TRF4270AF
LX108	23103822	Chip (Ferrite Bead), TEM2117T
LX109	23103822	Chip (Ferrite Bead), TEM2117T
LX110	23103822	Chip (Ferrite Bead), TEM2117T
LX111	23289270	Coil, Peaking, TRF4270AF
LX113	23103822	Chip (Ferrite Bead), TEM2117T
LX201	23103822	Chip (Ferrite Bead), TEM2117T
LX202	23103822	Chip (Ferrite Bead), TEM2117T
LX203	23103822	Chip (Ferrite Bead), TEM2117T
LX204	23103822	Chip (Ferrite Bead), TEM2117T
LX209	23103822	Chip (Ferrite Bead), TEM2117T
LX210	23103822	Chip (Ferrite Bead), TEM2117T
LX212	23103822	Chip (Ferrite Bead), TEM2117T
LX214	23103822	Chip (Ferrite Bead), TEM2117T
LX215	23103822	Chip (Ferrite Bead), TEM2117T
LX216	23103822	Chip (Ferrite Bead), TEM2117T
LX217	23103822	Chip (Ferrite Bead), TEM2117T
LX218	23103822	Chip (Ferrite Bead), TEM2117T
LX301	23103822	Chip (Ferrite Bead), TEM2117T
LX302	23103822	Chip (Ferrite Bead), TEM2117T
LX303	24000824	Chip, Jumper, 2125 type
LX306	23103822	Chip (Ferrite Bead), TEM2117T
LX307	23289229	Coil, Peaking, TRF42R2AF

Location No.	Part No.	Description
LX308	23289100	Coil, Peaking, TRF4100AF
LX309	23289100	Coil, Peaking, TRF4100AF
LX400	23289109	Coil, Peaking, TRF41R0AF
LX401	23289109	Coil, Peaking, TRF41R0AF
LX402	23289109	Coil, Peaking, TRF41R0AF
LX403	23289109	Coil, Peaking, TRF41R0AF
LX404	23289109	Coil, Peaking, TRF41R0AF
LX405	23289109	Coil, Peaking, TRF41R0AF
LX406	23289109	Coil, Peaking, TRF41R0AF
LX407	23289109	Coil, Peaking, TRF41R0AF
LX408	23289109	Coil, Peaking, TRF41R0AF
LX409	23289109	Coil, Peaking, TRF41R0AF
LZ01	23238712	Coil, Peaking, TRF4150AJ
LZ02	23238716	Coil, Peaking, TRF4689AJ
LZ03	23238716	Coil, Peaking, TRF4689AJ
LZ04	23238709	Coil, Peaking, TRF4270AJ
LZ05	23238716	Coil, Peaking, TRF4689AJ
LZ06	23238709	Coil, Peaking, TRF4270AJ
LZ07	23238709	Coil, Peaking, TRF4270AJ
LZ08	23238707	Coil, Peaking, TRF4390AJ
LZ09	70131060	Filter, ZBF253D-00
LZ10	70131060	Filter, ZBF253D-00
LZ11	23289270	Coil, Peaking, TRF4270AF
T401	23224333	Transformer, Horiz. Drive, TLN1080
⚠T461	23236513	Transformer, Flyback, TFB4137AR
T801	23211670	Line Filter, TRF3164G
⚠T803	23217350	Transformer, Converter, TPW3367AR
T804	23211670	Line Filter, TRF3164G

SEMICONDUCTORS

Q200	A6330059	Transistor, 2SC2482(C)
Q201	A6534053	Transistor, 2SA1015-Y(TE
Q204	A6317440	Transistor, 2SC1815-Y
Q205	A6317440	Transistor, 2SC1815-Y
Q207	A6342206	Transistor, 2SC2878-A(TE
Q301	23905610	IC, LA7846N
Q302	B0384625	IC, TA8859CP
Q303	A6534053	Transistor, 2SA1015-Y(TE
Q304	A6317440	Transistor, 2SC1815-Y
Q360	A6002040	Transistor, RN1204
Q361	A6002040	Transistor, RN1204
Q362	A6002050	Transistor, RN1205
Q370	A6534053	Transistor, 2SA1015-Y(TE
Q402	A6325419	Transistor, 2SC2235-O(FA
Q404	A6371775	Transistor, 2SC5144
Q418	23314141	Transistor, 2SC3852
Q420	23314141	Transistor, 2SC3852
Q421	A6317440	Transistor, 2SC1815-Y
Q430	23314141	Transistor, 2SC3852
Q460	23314850	Transistor, 2SA1788-E
Q461	A6317440	Transistor, 2SC1815-Y
Q462	A6317440	Transistor, 2SC1815-Y
Q470	A6317440	Transistor, 2SC1815-Y
Q501	B0385990	IC, TA1259N
Q502	A6317440	Transistor, 2SC1815-Y
Q503	A6317440	Transistor, 2SC1815-Y
Q510	A6317440	Transistor, 2SC1815-Y
Q518	A6317440	Transistor, 2SC1815-Y
Q611	A6534053	Transistor, 2SA1015-Y(TE
Q612	A6534053	Transistor, 2SA1015-Y(TE
Q670	B0377341	IC, TA8256H(V31

Location No.	Part No.	Description
Q671	A6342206	Transistor, 2SC2878-A(TE
Q672	A6342206	Transistor, 2SC2878-A(TE
Q673	A6342206	Transistor, 2SC2878-A(TE
Q688	A6002040	Transistor, RN1204
Q705	A6317440	Transistor, 2SC1815-Y
Q706	A6317440	Transistor, 2SC1815-Y
Q707	A6734590	Transistor, 2SC752(G)TM-Y
Q709	A6317440	Transistor, 2SC1815-Y
Q710	A6534053	Transistor, 2SA1015-Y(TE
Q711	23314911	Transistor, 2SB1569A
Q712	23314914	Transistor, 2SD2400A
Q719	A6319311	Transistor, 2SC1959-Y(TE
Q801	23905084	IC, STR-S6709
Q802	23314141	Transistor, 2SC3852
⚠Q826	A8643108	Photo Coupler, TLP621(GR-LF
Q830	23314141	Transistor, 2SC3852
Q831	23314141	Transistor, 2SC3852
Q832	23905977	IC, PQ09RD11
Q840	23318299	IC, L78MR05
Q901	A6368700	Transistor, 2SC4544
Q902	A6317440	Transistor, 2SC1815-Y
Q903	A6368700	Transistor, 2SC4544
Q904	A6317440	Transistor, 2SC1815-Y
Q905	A6368700	Transistor, 2SC4544
Q906	A6317440	Transistor, 2SC1815-Y
Q907	A6509154	Transistor, 2SA562TM-Y(T)
Q908	A6321265	Transistor, 2SC2120-Y(TE)
Q910	A6317440	Transistor, 2SC1815-Y
Q911	A6317440	Transistor, 2SC1815-Y
Q912	A6534053	Transistor, 2SA1015-Y(TE
Q913	A6534053	Transistor, 2SA1015-Y(TE
Q914	A6317440	Transistor, 2SC1815-Y
Q4321	A6002040	Transistor, RN1204
Q4420	23316816	IC, LA7860
Q4421	A6002040	Transistor, RN1204
Q4423	A6325419	Transistor, 2SC2235-O(FA
QA01	23906172	IC, TMP87CS38N-3476
QA02	23904666	IC, NM24C08EN
QA04	A6002040	Transistor, RN1204
QA05	A6734590	Transistor, 2SC752(G)TM-Y
QB01	A6317440	Transistor, 2SC1815-Y
QB30	A6317440	Transistor, 2SC1815-Y
QF01	23905948	IC, SDA5273SC134
QF03	A6317440	Transistor, 2SC1815-Y
QF04	A6734590	Transistor, 2SC752(G)TM-Y
QG01	B0385643	IC, TA1216AN
QQ01	B0385755	IC, TA1229N
QQ02	B0383881	IC, TA8772AN
QQ03	23314794	Transistor, 2PC1815Y
QQ04	23314794	Transistor, 2PC1815Y
QR21	23904807	IC, MC14577CP
QR22	23905603	IC, TDA8443B
QR23	A6534053	Transistor, 2SA1015-Y(TE
QR24	A6534053	Transistor, 2SA1015-Y(TE
QR25	23904807	IC, MC14577CP
QS01	A6342206	Transistor, 2SC2878-A(TE
QS02	A6342206	Transistor, 2SC2878-A(TE
QS03	A6342206	Transistor, 2SC2878-A(TE
QS04	A6342206	Transistor, 2SC2878-A(TE
QS05	A6342206	Transistor, 2SC2878-A(TE
QS06	A6342206	Transistor, 2SC2878-A(TE
QS07	A6010040	Transistor, RN2004
QS08	A6342206	Transistor, 2SC2878-A(TE
QS09	A6342206	Transistor, 2SC2878-A(TE

Location No.	Part No.	Description
QV01	B0385650	IC, TA1218N
QV02	A6317440	Transistor, 2SC1815-Y
QV03	A6317440	Transistor, 2SC1815-Y
QV04	A6317440	Transistor, 2SC1815-Y
QV05	A6534053	Transistor, 2SA1015-Y(TE
QV06	A6534053	Transistor, 2SA1015-Y(TE
QV07	A6342206	Transistor, 2SC2878-A(TE
QV08	A6317440	Transistor, 2SC1815-Y
QV09	A6317440	Transistor, 2SC1815-Y
QV10	A6317440	Transistor, 2SC1815-Y
QV11	A6534053	Transistor, 2SA1015-Y(TE
QV12	A6317440	Transistor, 2SC1815-Y
QV14	A6317440	Transistor, 2SC1815-Y
QV80	A6534053	Transistor, 2SA1015-Y(TE
QX10	70128490	IC, MM1031XMR
QX20	B0370000	IC, TA78L05F
QX21	B0488966	IC, TC74AC74F
QX21	A6030640	IC, TC7S32F
QX30	23319052	IC, MB40978PFQ
QX101	23314204	Transistor, 2SC2412K,Q
QX103	23314345	Transistor, IMZ1
QX104	23314204	Transistor, 2SC2412K,Q
QX105	A6030670	IC, TC7S66F
QX106	23905190	IC, TLC5510INS
QX108	23314204	Transistor, 2SC2412K,Q
QX109	23314344	Transistor, IMX1
QX110	A6030670	IC, TC7S66F
QX111	23314204	Transistor, 2SC2412K,Q
QX112	A6030670	IC, TC7S66F
QX114	23905190	IC, TLC5510INS
QX116	23314204	Transistor, 2SC2412K,Q
QX117	23314344	Transistor, IMX1
QX118	A6030670	IC, TC7S66F
QX119	23314204	Transistor, 2SC2412K,Q
QX120	A6030670	IC, TC7S66F
QX201	A6361770	Transistor, 2SC3437-Y
QX202	A6030871	IC, TC7W04F(BRA)
QX203	23905013	IC, TLC2932IPW
QX205	23905013	IC, TLC2932IPW
QX211	B0508717	IC, TC190G04AF-0
QX212	23904272	IC, M518221-30ZS
QX213	23904272	IC, M518221-30ZS
QX302	23314204	Transistor, 2SC2412K,Q
QX303	23314204	Transistor, 2SC2412K,Q
QX304	23314204	Transistor, 2SC2412K,Q
QX305	23314204	Transistor, 2SC2412K,Q
QX306	23314204	Transistor, 2SC2412K,Q
QX307	23314204	Transistor, 2SC2412K,Q
QZ01	B0410688	IC, TC9090AN
QZ02	A6317440	Transistor, 2SC1815-Y
QZ03	A6317440	Transistor, 2SC1815-Y
QZ04	A6317440	Transistor, 2SC1815-Y
QZ06	A6317440	Transistor, 2SC1815-Y
D101	23316411	Diode, 1SS184
D201	23115599	Diode, 1N4148
D240	23316554	Diode, 1SS146
D301	23118479	Diode, BYD33J
D302	23118479	Diode, BYD33J
D303	23316794	Diode, SC570A
D306	23115599	Diode, 1N4148
D312	23115599	Diode, 1N4148
D370	23316658	Diode, Zener, MTZJ3.6A
D371	23115599	Diode, 1N4148
D372	23115599	Diode, 1N4148

Location No.	Part No.	Description
D404	A7680591	Diode, 5VUZ52
D406	23118479	Diode, BYD33J
D418	23316749	Diode, Zener, MTZJ30A
D419	23316716	Diode, Zener, MTZJ11B
D420	23316716	Diode, Zener, MTZJ11B
D421	23316680	Diode, Zener, MTZJ7.5A
D422	23316726	Diode, Zener, MTZJ15C
D4301	23316726	Diode, Zener, MTZJ15C
D431	23316678	Diode, Zener, MTZJ6.8B
D432	23316678	Diode, Zener, MTZJ6.8B
D436	23115599	Diode, 1N4148
D441	23316687	Diode, Zener, MTZJ9.1B
D460	23118479	Diode, BYD33J
D461	23316582	Diode, ERC20-06
D463	23115599	Diode, 1N4148
D464	23316718	Diode, Zener, MTZJ12A
D466	23316672	Diode, Zener, MTZJ5.6B
D467	23118479	Diode, BYD33J
D468	23316718	Diode, Zener, MTZJ12A
D474	23316719	Diode, Zener, MTZJ12B
D490	23115599	Diode, 1N4148
D491	A7568460	Diode, TVR-1B
D498	23316719	Diode, Zener, MTZJ12B
D499	23115599	Diode, 1N4148
D501	23115599	Diode, 1N4148
D502	23115599	Diode, 1N4148
D611	23115599	Diode, 1N4148
D612	23115599	Diode, 1N4148
D613	23115599	Diode, 1N4148
D615	23115599	Diode, 1N4148
D617	23115599	Diode, 1N4148
D618	23115599	Diode, 1N4148
D670	23115599	Diode, 1N4148
D671	23115599	Diode, 1N4148
D674	23115599	Diode, 1N4148
D675	23115599	Diode, 1N4148
D704	23115599	Diode, 1N4148
D705	23115599	Diode, 1N4148
D715	23115599	Diode, 1N4148
D721	23115599	Diode, 1N4148
D801	23316795	Diode, D6SB60L, F05
D803	23118479	Diode, BYD33J
D804	23316678	Diode, Zener, MTZJ6.8B
D805	23115599	Diode, 1N4148
D806	23118479	Diode, BYD33J
D808	23118479	Diode, BYD33J
D809	23316672	Diode, Zener, MTZJ5.6B
D810	23115599	Diode, 1N4148
D811	23115599	Diode, 1N4148
D812	23118451	Diode, RU-4A
D815	23316725	Diode, Zener, MTZJ15B
D828	23115599	Diode, 1N4148
D883	23316406	Diode, FML-G16S
D885	23316184	Diode, FML-G12S
D891	23316184	Diode, FML-G12S
D892	23316673	Diode, Zener, MTZJ5,6C
D892	23316184	Diode, FML-G12S
D893	23316672	Diode, Zener, MTZJ5.6B
D896	23118479	Diode, BYD33J
D901	23115599	Diode, 1N4148
D903	23115599	Diode, 1N4148
D904	23115599	Diode, 1N4148
D905	23115599	Diode, 1N4148
D906	23115599	Diode, 1N4148

Location No.	Part No.	Description
D907	23115599	Diode, 1N4148
D908	23115599	Diode, 1N4148
D909	23115599	Diode, 1N4148
D910	23115599	Diode, 1N4148
D911	23118479	Diode, BYD33J
DB01	23358505	LED, SLR56VC196F
DB02	23358503	LED, SCL003MC3FX
DB30	23115599	Diode, 1N4148
DF01	23316654	Diode, Zener, MTZJ3.0A
DR01	23316719	Diode, Zener, MTZJ12B
DR02	23316719	Diode, Zener, MTZJ12B
DR03	23316719	Diode, Zener, MTZJ12B
DR04	23316719	Diode, Zener, MTZJ12B
DV01	23316687	Diode, Zener, MTZJ9.1B
DV02	23316687	Diode, Zener, MTZJ9.1B
DV03	23316687	Diode, Zener, MTZJ9.1B
DV04	23316687	Diode, Zener, MTZJ9.1B
DV05	23316687	Diode, Zener, MTZJ9.1B
DV06	23316687	Diode, Zener, MTZJ9.1B
DV07	23316687	Diode, Zener, MTZJ9.1B
DV09	23115599	Diode, 1N4148
DV10	23115599	Diode, 1N4148
DV11	23115599	Diode, 1N4148
DV12	23316687	Diode, Zener, MTZJ9.1B
DV80	23115599	Diode, 1N4148
DZ01	23316690	Diode, Zener, MTZJ10B

MISCELLANEOUS

B202	23470427	Frame, Terminal
⚠F470	23144502	Fuse, 1.0A
F470A	23165433	Holder, Fuse
F470B	23165433	Holder, Fuse
⚠F801	23144507	Fuse, 3.15A
F801A	23165433	Holder, Fuse
⚠F802	23144506	Fuse, 2.5A 250V
F802A	23165433	Holder, Fuse
G224	24366271	CF, 270 ohm
G311	24366332	CF, 3300 ohm
G333	23238702	Coil, Peaking, TRF4101AJ
G401	23103859	Ferrite Choke, TEM2011
G402	23103859	Ferrite Choke, TEM2011
G403	23103859	Ferrite Choke, TEM2011
G404	23103859	Ferrite Choke, TEM2011
G430	A7568460	Diode, TVR-1B
G510	23289470	Coil, Peaking, TRF4470AF
G516	24366101	CF, 100 ohm
G517	24366101	CF, 100 ohm
G601	23238714	Coil, Peaking, TRF4100AJ
G602	23238714	Coil, Peaking, TRF4100AJ
G812	23103859	Ferrite Choke, TEM2011
GV05	23289109	Coil, Peaking, TRF41R0AF
GV13	24366681	CF, 680 ohm
GV80	24366681	CF, 680 ohm
GV81	24366681	CF, 680 ohm
H002	23148250	Module, MVGS44A, IGR BG/DK (2876DD)
H002	23148276	Module, MVGS49 (2876DF)
KB01	23904946	Remote Sensor, RPM-676CBR-S
P661	23363607	Headphone Jack, 3.5mm
⚠P801	23372014	Power Cord
PV03	23365546	Jack, 2C-2P
PV04	23363252	Pin Jack, Yellow
PV05	23365508	Jack, Phono

Location No.	Part No.	Description
⚠S801	23344395	Switch, Power
SA01	23145430	Switch, Push, 1C1P
SA02	23145430	Switch, Push, 1C1P
SA03	23145430	Switch, Push, 1C1P
SA04	23145430	Switch, Push, 1C1P
SA06	23145430	Switch, Push, 1C1P
⚠V901A	23902891	Socket, CRT, 10P
W661	23351116	Speaker, SPK-1382, 60x120mm, 8 ohm
W662	23351116	Speaker, SPK-1382, 60x120mm, 8 ohm
W665	23351080	Speaker, SPK-1352, 100x100mm, 6 ohm
X401	23153721	Ceramic Resonator, 503kHz, TCR1023
X501	23153961	Crystal, 3.58MHz
X503	23153979	Crystal, 4.43MHz
XA01	23153325	Ceramic Resonator, 8.00M, TCR1056
XF01	23153421	Crystal, 20.48MHz
XQ01	23153969	Crystal, 4MHz
Z201	23107519	Ceramic Video Trap, 4.43MHz, TCF1066
Z420	23144539	Protector, PRF20005491, 125V, 2A
⚠Z430	23144536	Protector, PRF10005491, 125V, 1A
Z801	23904998	IC, HIC1016
⚠Z889	23144543	Protector, PRF50005491, 125V, 5A
⚠Z890	23144543	Protector, PRF50005491, 125V, 5A
⚠Z891	23144543	Protector, PRF50005491, 125V, 5A
⚠Z896	23144539	Protector, PRF20005491, 125V, 2A
⚠Z897	23144450	Protector, PRF2000, 125V, 2A
ZX101	23103823	Filter, TEM2027D
ZX102	23103823	Filter, TEM2027D
ZX103	23103823	Filter, TEM2027D
ZX104	23103823	Filter, TEM2027D
ZX201	23103823	Filter, TEM2027D
ZX202	23103823	Filter, TEM2027D
ZX203	23103823	Filter, TEM2027D
ZX801	23303181	Filter, TEM1012N
ZX802	23303181	Filter, TEM1012N

PC BOARD ASSEMBLIES

*U902A	23706594	Signal Board, PB7208N-1 (2876DD)
*U902A	23706780	Signal Board, PB7208C-1 (2876DF)
*U902B	23706597	A-PRO Board, PB7208N-2 (2876DD)
*U902B	23706783	A-PRO Board, PB7208C-2 (2876DF)
*U903A	23706598	Power Board, PB7209Z-1
*U903B	23706599	Def Board, PB7209Z-2
*U904	23706629	Back Terminal Board, PB7211Y
*U905	23706505	CRT Drive Board, PB7212X
*U906A	23706600	SECAM Board, PB7213X-1
*U906B	23706601	Comb Board, PB7213X-2
*U906C	23706508	YUV SW Board, PB7213X-3
*U906D	23706507	E/W Board, PB7213X-4
*U907	23706855	Text Board, PB6513Y
*U908A	23706825	UP Conver Board, PB7366X

PICTURE TUBE

⚠V901	23312716	Picture Tube, A66EAK552X54

TUNER

H001	23321227	Tuner, EGA12LX1

ACCESSORIES

K902	23306175	Remote Hand Unit, CT-9867
Y102	23563049	Owner's Manual, French, 2876DF
Y103	23563015	Owner's Manual, German, 2876DD
Y104	23563016	Owner's Manual, Italian, 2876DD

SIGNAL BOARD PB7208N-1/PB7208C-1

BOTTOM (FOIL) SIDE

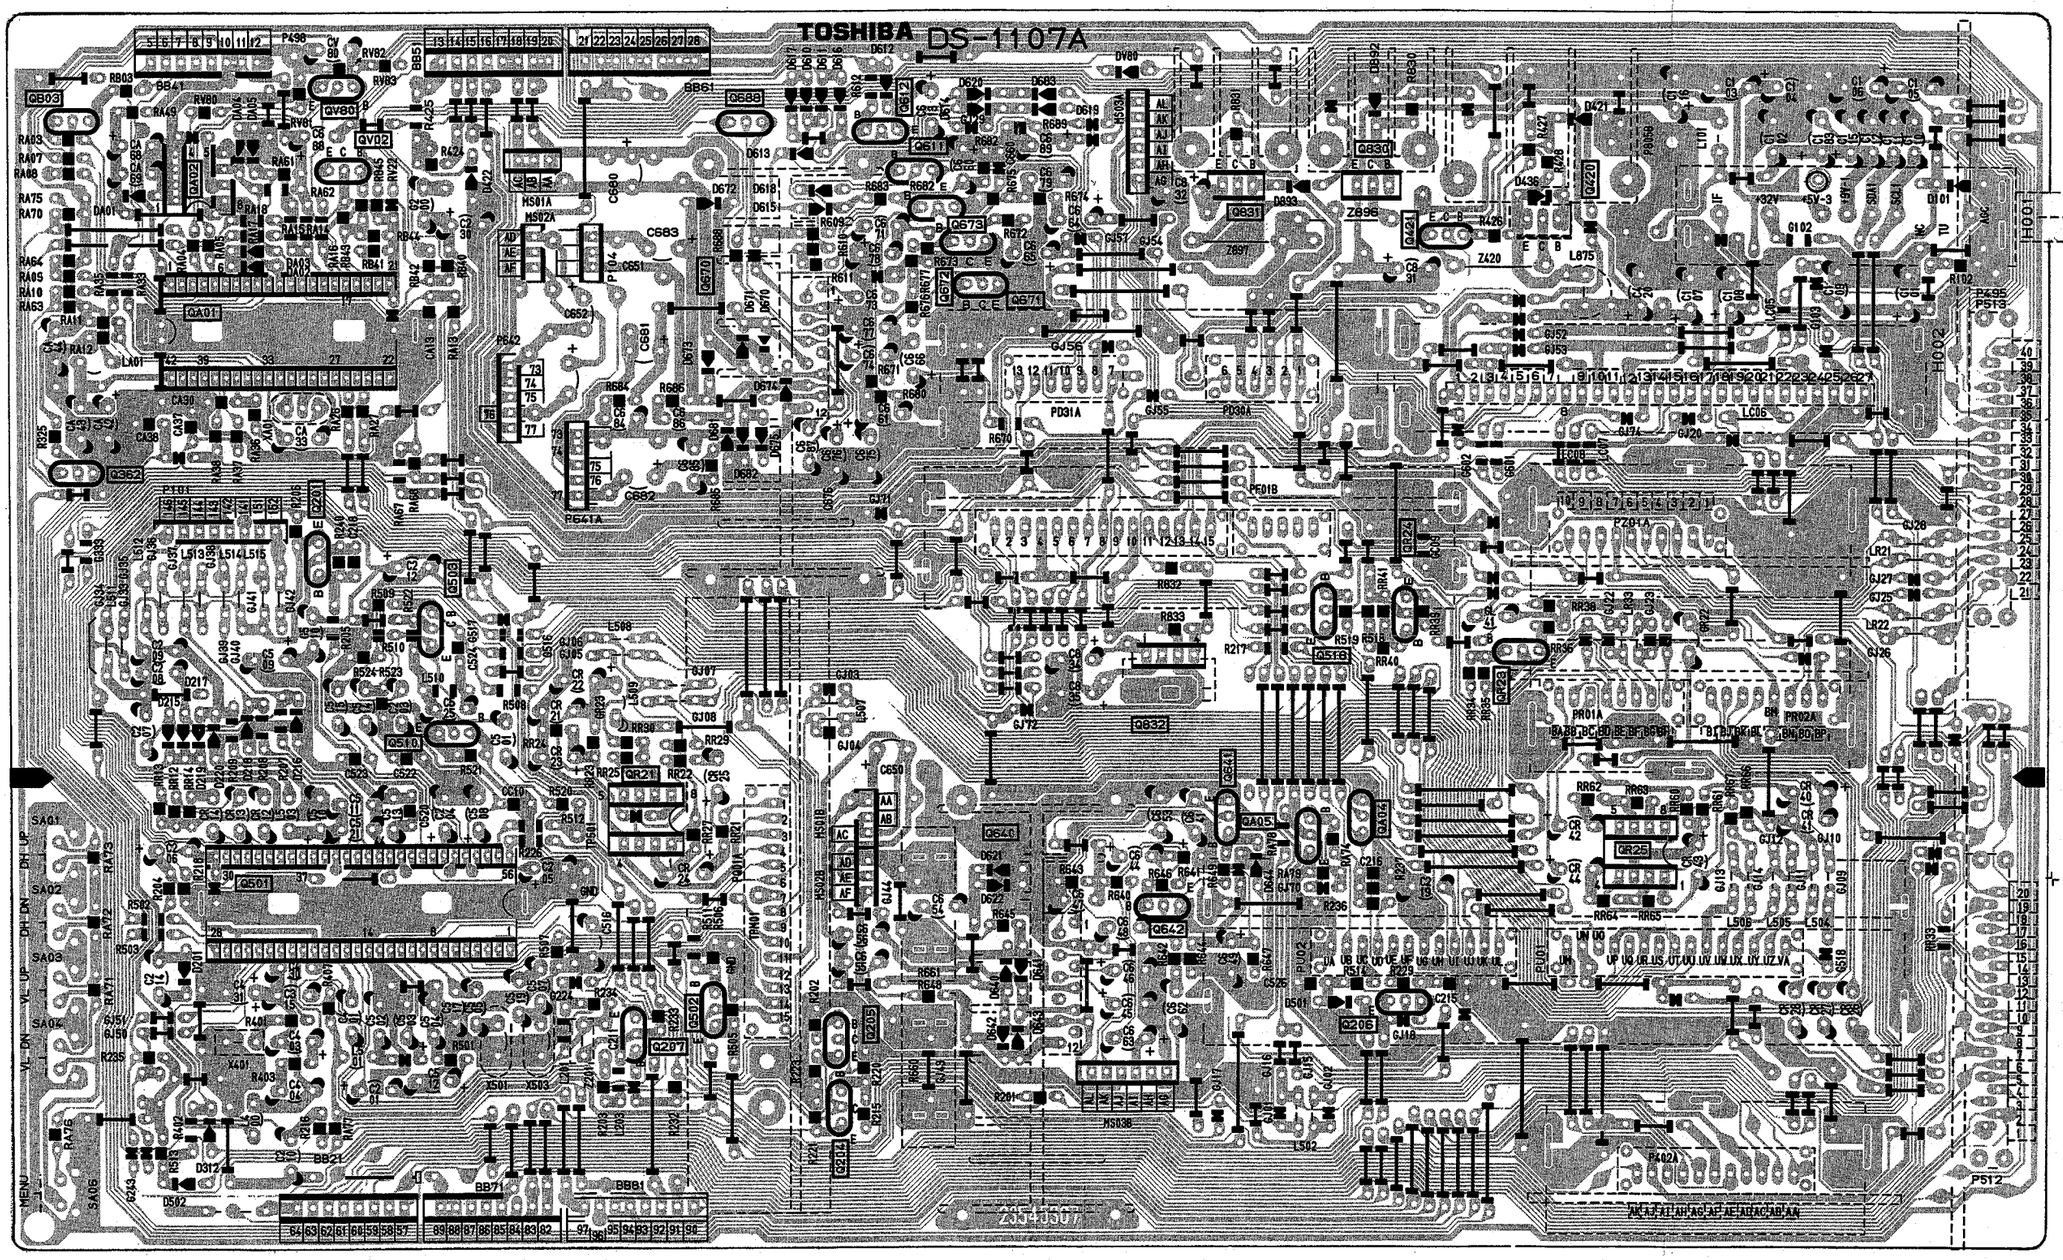

POWER BOARD PB7209Z-1/DEF BOARD PB7209Z-2

BOTTOM (FOIL) SIDE

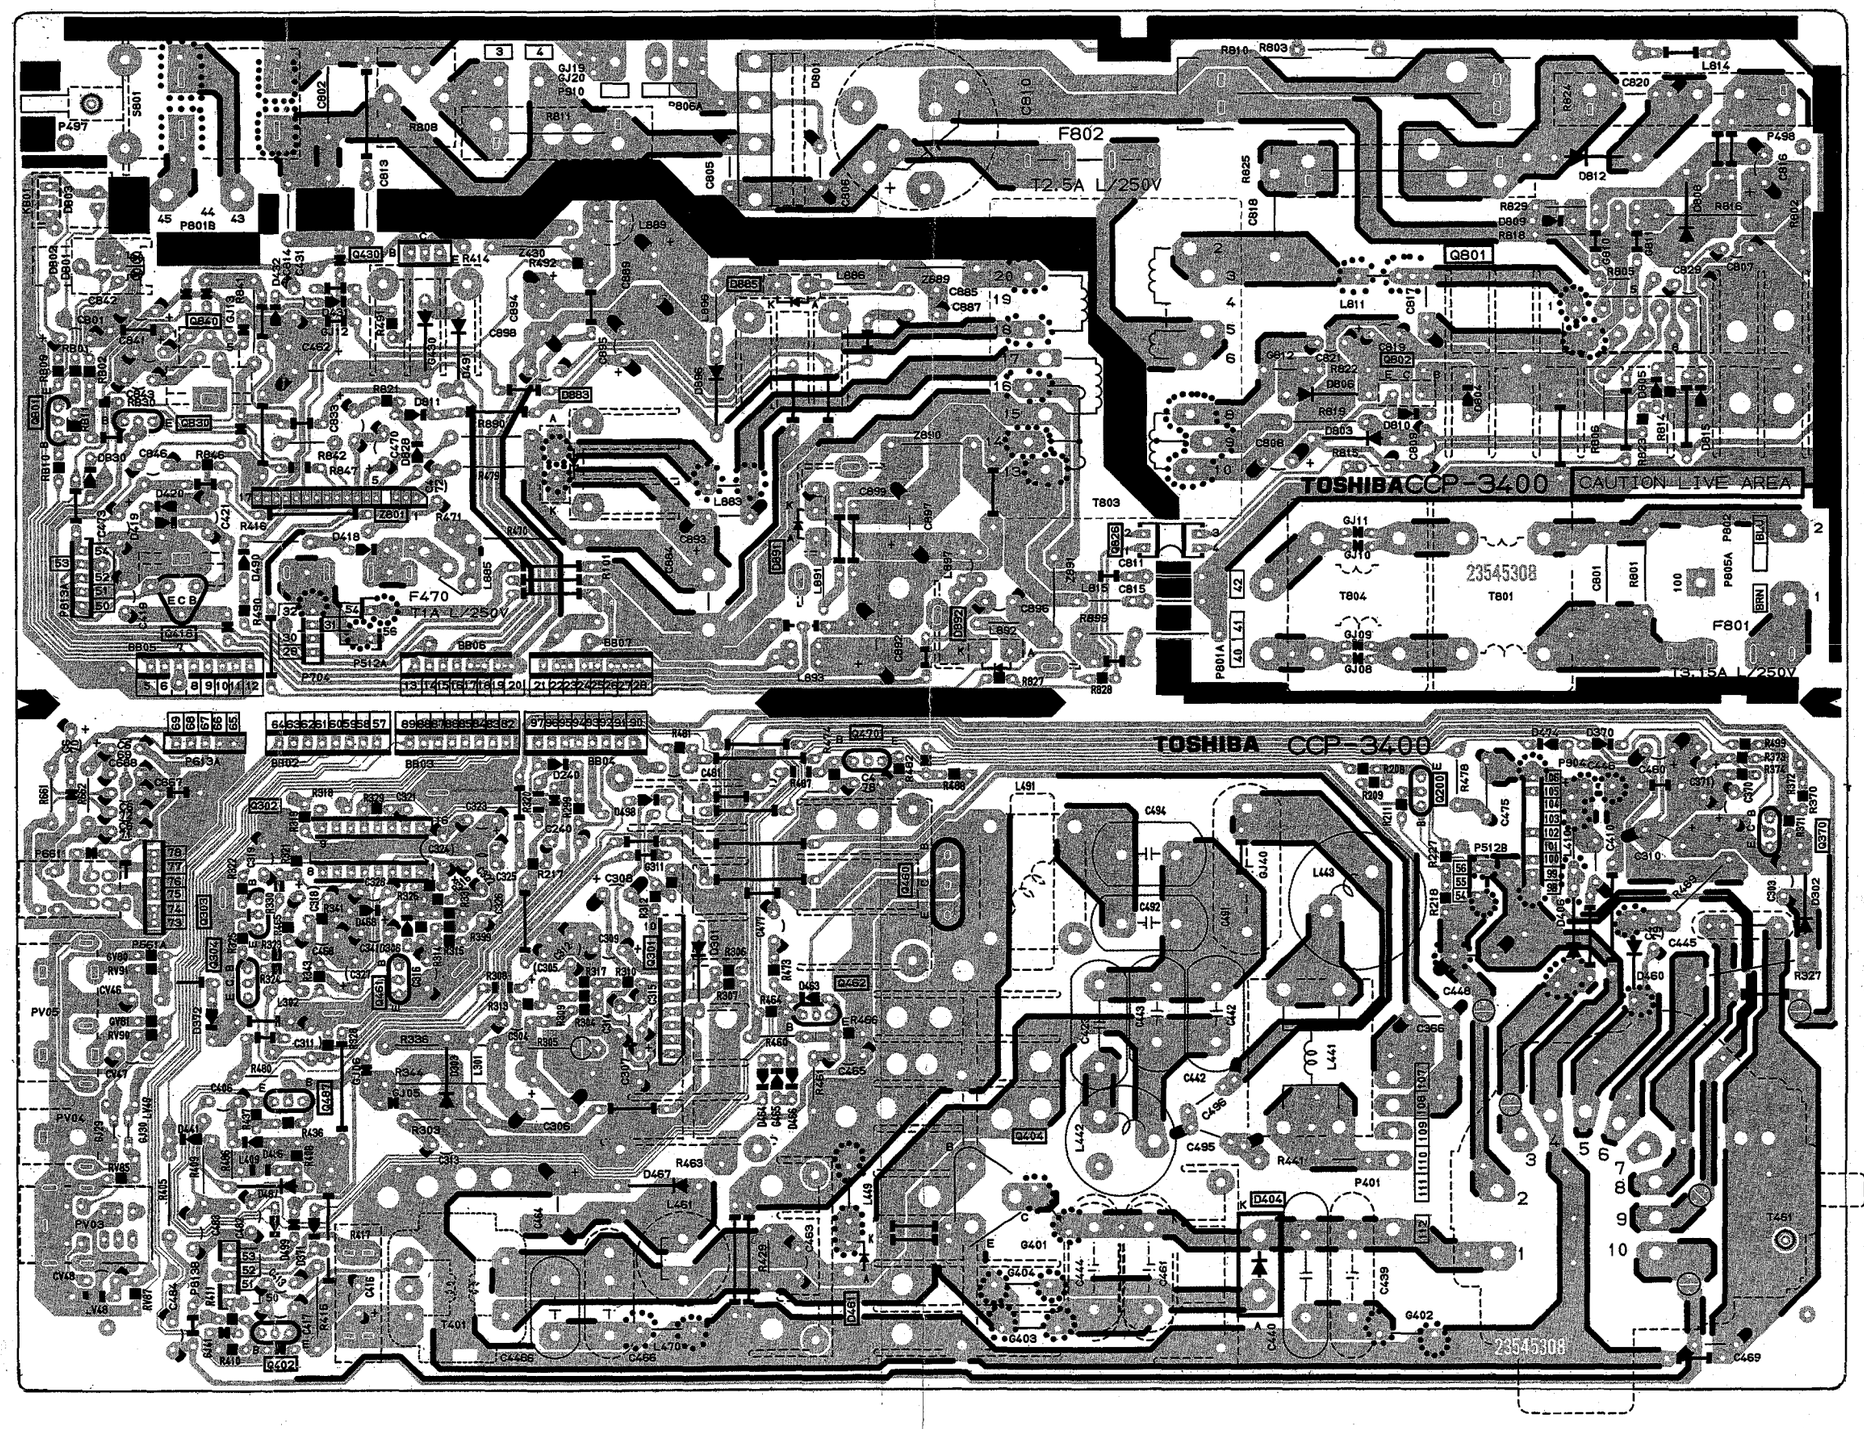

BACK TERMINAL/AV BOARD PB7211Y

BOTTOM (FOIL) SIDE

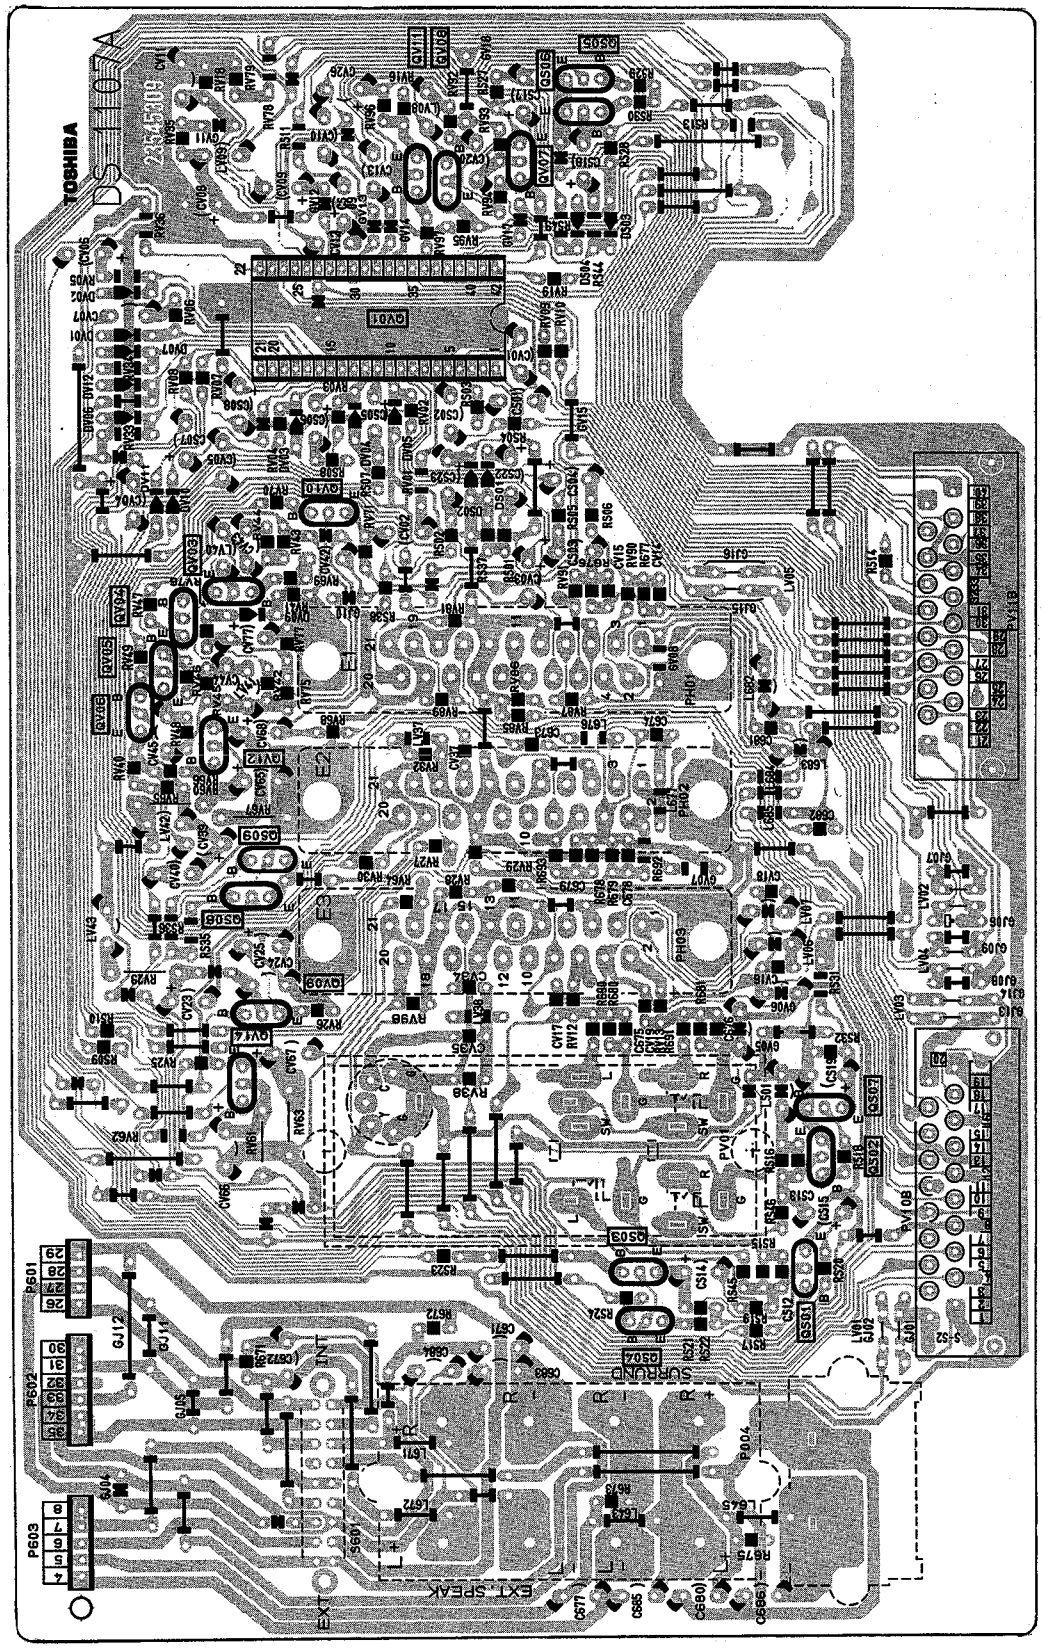

CRT DRIVE/DSM BOARD PB7212X

BOTTOM (FOIL) SIDE

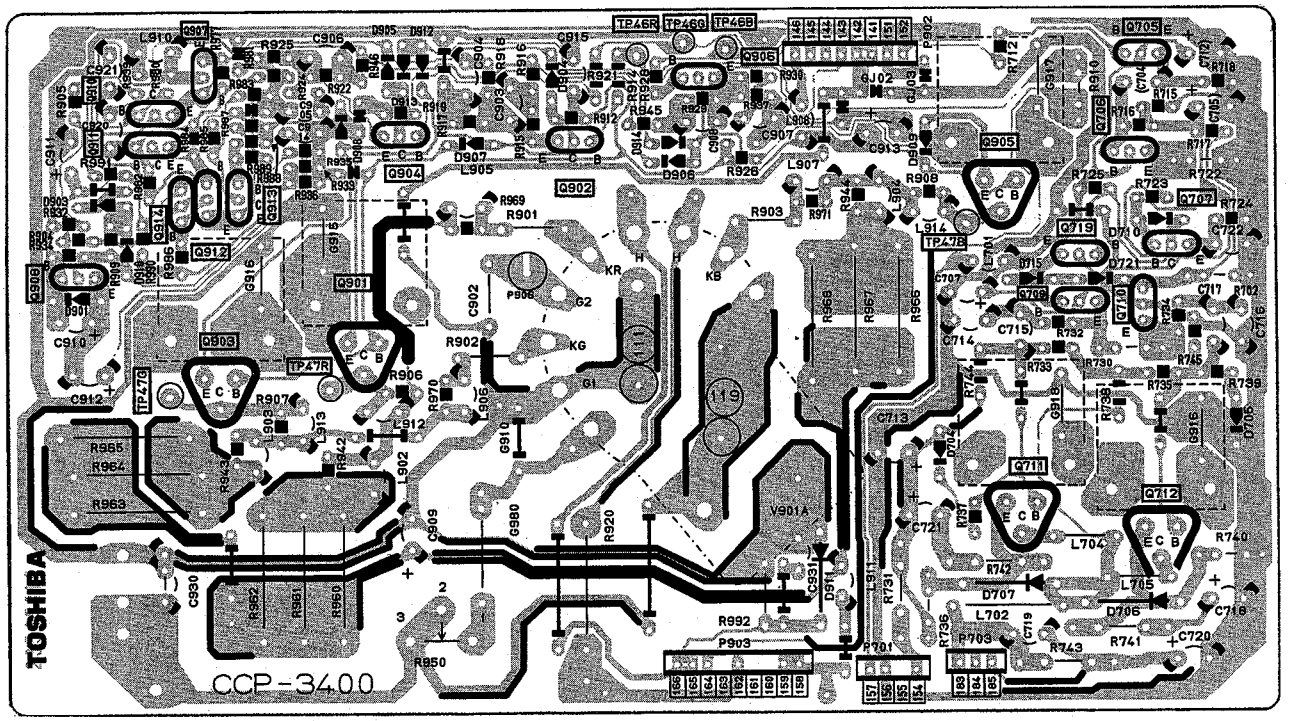

A-PRO BOARD PB7208N-2/PB7208C-2

BOTTOM (FOIL) SIDE

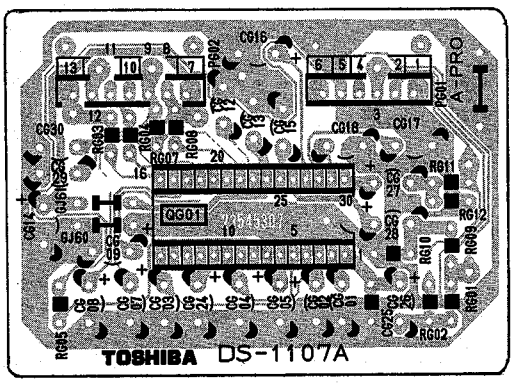

SECAM BOARD PB7213X-1

BOTTOM (FOIL) SIDE

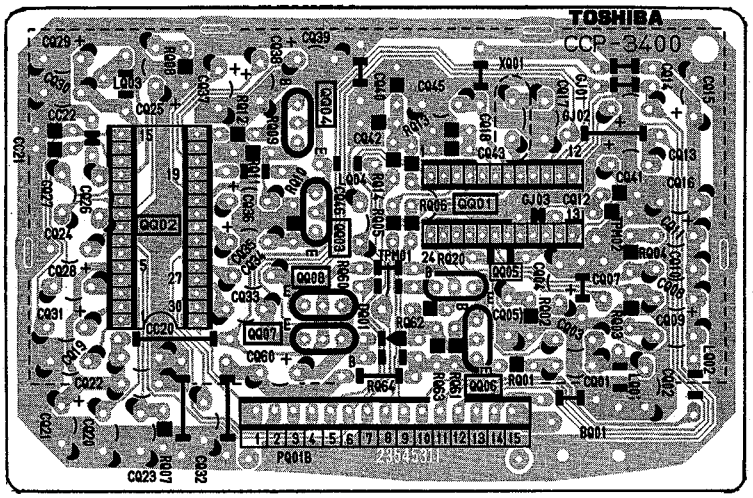

COMB BOARD PB7213X-2

BOTTOM (FOIL) SIDE

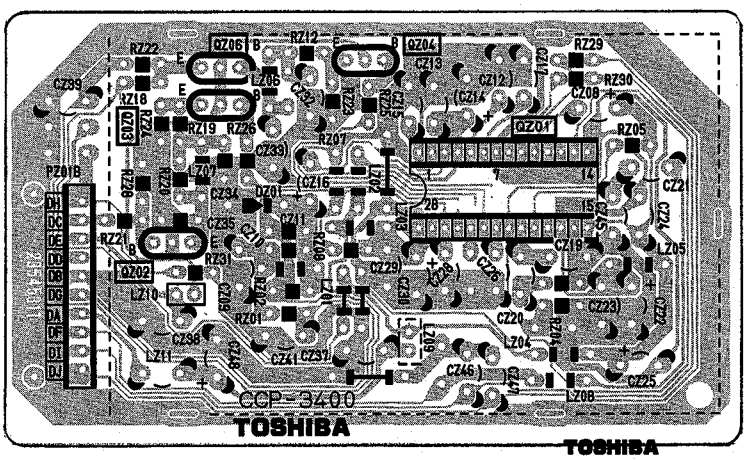

YUV S/W BOARD PB7213X-3

BOTTOM (FOIL) SIDE

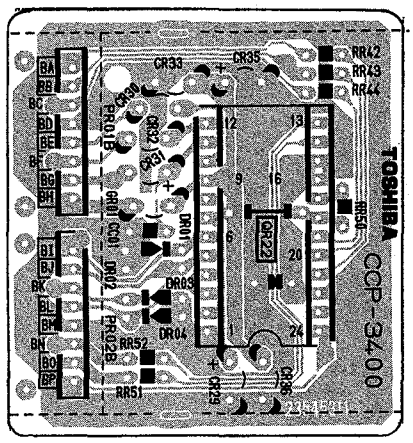

PAL/100Hz BOARD PB7213X-4

BOTTOM (FOIL) SIDE

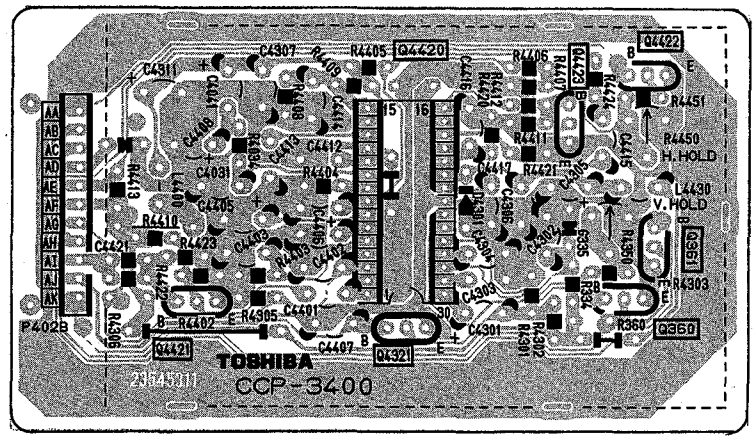

TEXT BOARD PB6513Y

BOTTOM (FOIL) SIDE

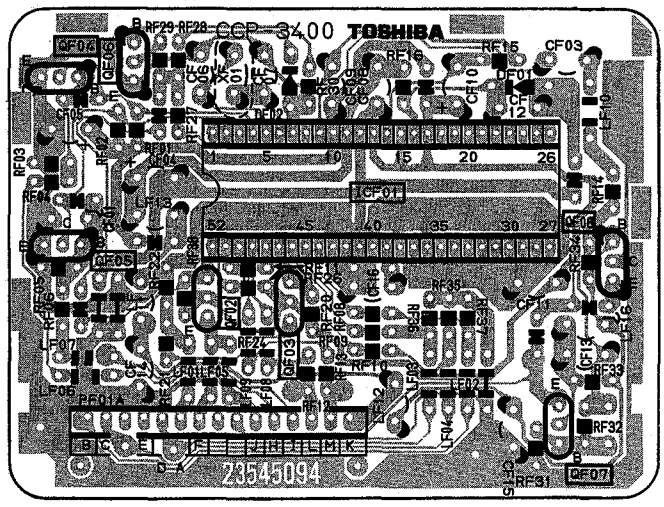

TERMINAL VIEW OF TRANSISTORS

① 2SD2253



② 2SC3852
2SD1763A
2SC1569
2SC4544
2SA1788
2SA1306
2SA1186A



③ 2SC752GTM
2SC2482
2SC2655
2SC4721P



④ 2SC752
2SA562TM
2SA1015
2SC1815
2SC2878
2SC1740S
2SC2120
2SA9335

⑤ 2SA1788



⑥ RN2203
RN2201
RN2004
RN1203
RN1204
RN2204
RN1205

⑦ 2SD1554



MEMO

MEMO

MEMO

SPECIFICATIONS (2876DD)

Input Power Rating: 150 Watts (Normal), AC 220 ~ 240 Volts, 50 Hz

Aerial Input Impedance: 75 ohm unbalanced type for VHF, UHF and CATV

Receiving Channels:

System		VHF	UHF	CATV	
PAL B/G	CCIR	2 ~ 12	21 ~ 69	S1 ~ S41	X ~ Z + 2,
SECAM B/G	CCIR	2 ~ 12	21 ~ 69	S1 ~ S41	X ~ Z + 2,
PAL D/K	CHINA	1 ~ 12	13 ~ 57	Z-1 ~ Z-35	
SECAM D/K	OIRT	1 ~ 12	21 ~ 69	X-1 ~ X-19	

PAL, SECAM 50 Hz/60 Hz (For Video Disk playback)
4.43 NTSC (For VCR playback), 3.58 NTSC (For VCR playback)

Intermediate Frequencies:
Picture I-F carrier frequency ..... 38.9 MHz (L VL)
Sound I-F carrier frequency
- L System ..... 32.4 MHz (L VH, U)/40.97 MHz (L VL)
- B/G System ..... 33.4 MHz
- D/K System ..... 32.4 MHz

Picture Tube: 28 inches, A66EAK552X54, 660 mm (measured on diagonal of viewable picture area)
110° deflection

Sound Output: 10 W + 10W (at 10% Distortion, Main)
13W (at 10% Distortion, Woofer)

Speakers: 60 mm x 120 mm oval, 2 pcs (Main)
100 mm, round, 1 pc (Woofer)

Aux. Terminals: 21 pin socket (FULL), 21 pin socket (S-VIDEO/AV), MONITOR OUTPUT, STEREO HEADPHONE JACK (3.5mm).

Cabinet: Table type

Dimensions:
Height ..... 569 mm
Width ..... 760 mm
Depth ..... 480 mm

Mass: 36.3 kg

Specifications are subject to change without notice.

SPECIFICATIONS (2876DF)

Input Power Rating: 150 Watts (Normal), , AC 220 ~ 240 Volts, 50 Hz

Aerial Input Impedance: 75 ohm unbalanced type for VHF, UHF and CATV

Receiving Channels:

System		VHF	UHF	CATV	
PAL B/G	CCIR	2 ~ 12	21 ~ 69	S1 ~ S41	X ~ Z + 2,
SECAM B/G	CCIR	2 ~ 12	21 ~ 69	S1 ~ S41	X ~ Z + 2,
PAL D/K	CHINA	1 ~ 12	13 ~ 57	Z-1 ~ Z-35	
SECAM D/K	OIRT	1 ~ 12	21 ~ 69	X-1 ~ X-19	
PAL I	UK	–	21 ~ 69	–	
SECAM L	FRANCE /CCIR	FB ~ F6	21 ~ 69	S1 ~ S41	X ~ Z + 2,

PAL, SECAM 50 Hz/60 Hz (For VCR playback)
4.43 NTSC (For VCR playback), 3.58 NTSC (For VCR playback)

Intermediate Frequencies:
Picture I-F carrier frequency ..... 38.9/33.95 MHz (L VL)
Sound I-F carrier frequency
- L System ..... 32.4 MHz (L VH, U)/40.97 MHz (L VL)
- B/G System ..... 32.9 MHz
- I System ..... 33.4 MHz
- D/K System ..... 40.45 MHz

Picture Tube: 28 inches, A66EAK552X54, 660 mm (measured on diagonal of viewable picture area)
110° deflection

Sound Output: 10 W + 10 W (at 10% Distortion, Main)
13 W (at 10% Distortion, Woofer)

Speakers: 60 mm x 120 mm oval, 2 pcs (Main)
100 mm, round, 1 pc (Woofer)

Aux. Terminals: 21 pin socket (FULL), 21 pin socket (S-VIDEO/AV), MONITOR OUTPUT, STEREO HEADPHONE JACK (3.5mm).

Cabinet: Table type

Dimensions:
Height ..... 569 mm
Width ..... 760 mm
Depth ..... 480 mm

Mass: 36.3 kg

Specifications are subject to change without notice.

SCHEMATIC DIAGRAM MODEL : 2876DD / 2876DF (1/4)

CAUTION: The international hazard symbols "⚠" in the schematic diagram and the parts list designate components which have special characteristics important for safety and should be replaced only with types identical to those in the original circuit or specified in the parts list. The mounting position of replacements is to be identical with originals. Before replacing any of these components, read carefully the PRODUCT SAFETY NOTICE on page 3. Do not degrade the safety of the receiver through improper servicing.

OBSERVATION OF VOLTAGES AND WAVEFORMS

1. Voltages read with VTVM from point shown to chassis ground, line voltage 220 volts, colour bar signal. Voltages reading may vary ±20%.
2. All waveforms are taken using a wide band oscilloscope and a low capacity probe.
3. Waveforms are taken using a standard colour bar signal.
4. Make sure that CONTRAST and COLOUR controls are in mid position and BRIGHTNESS control is almost in maximum position. Set other controls for best picture.

NOTES:

1. D.C. resistance value of a principal
   gram. These are measured for separa
2. The circuits are subject to change wi
3. ● : Solder links.

U902 SIGNAL BOARD
2876DD PB7208N-1
2876DF PB7208C-1

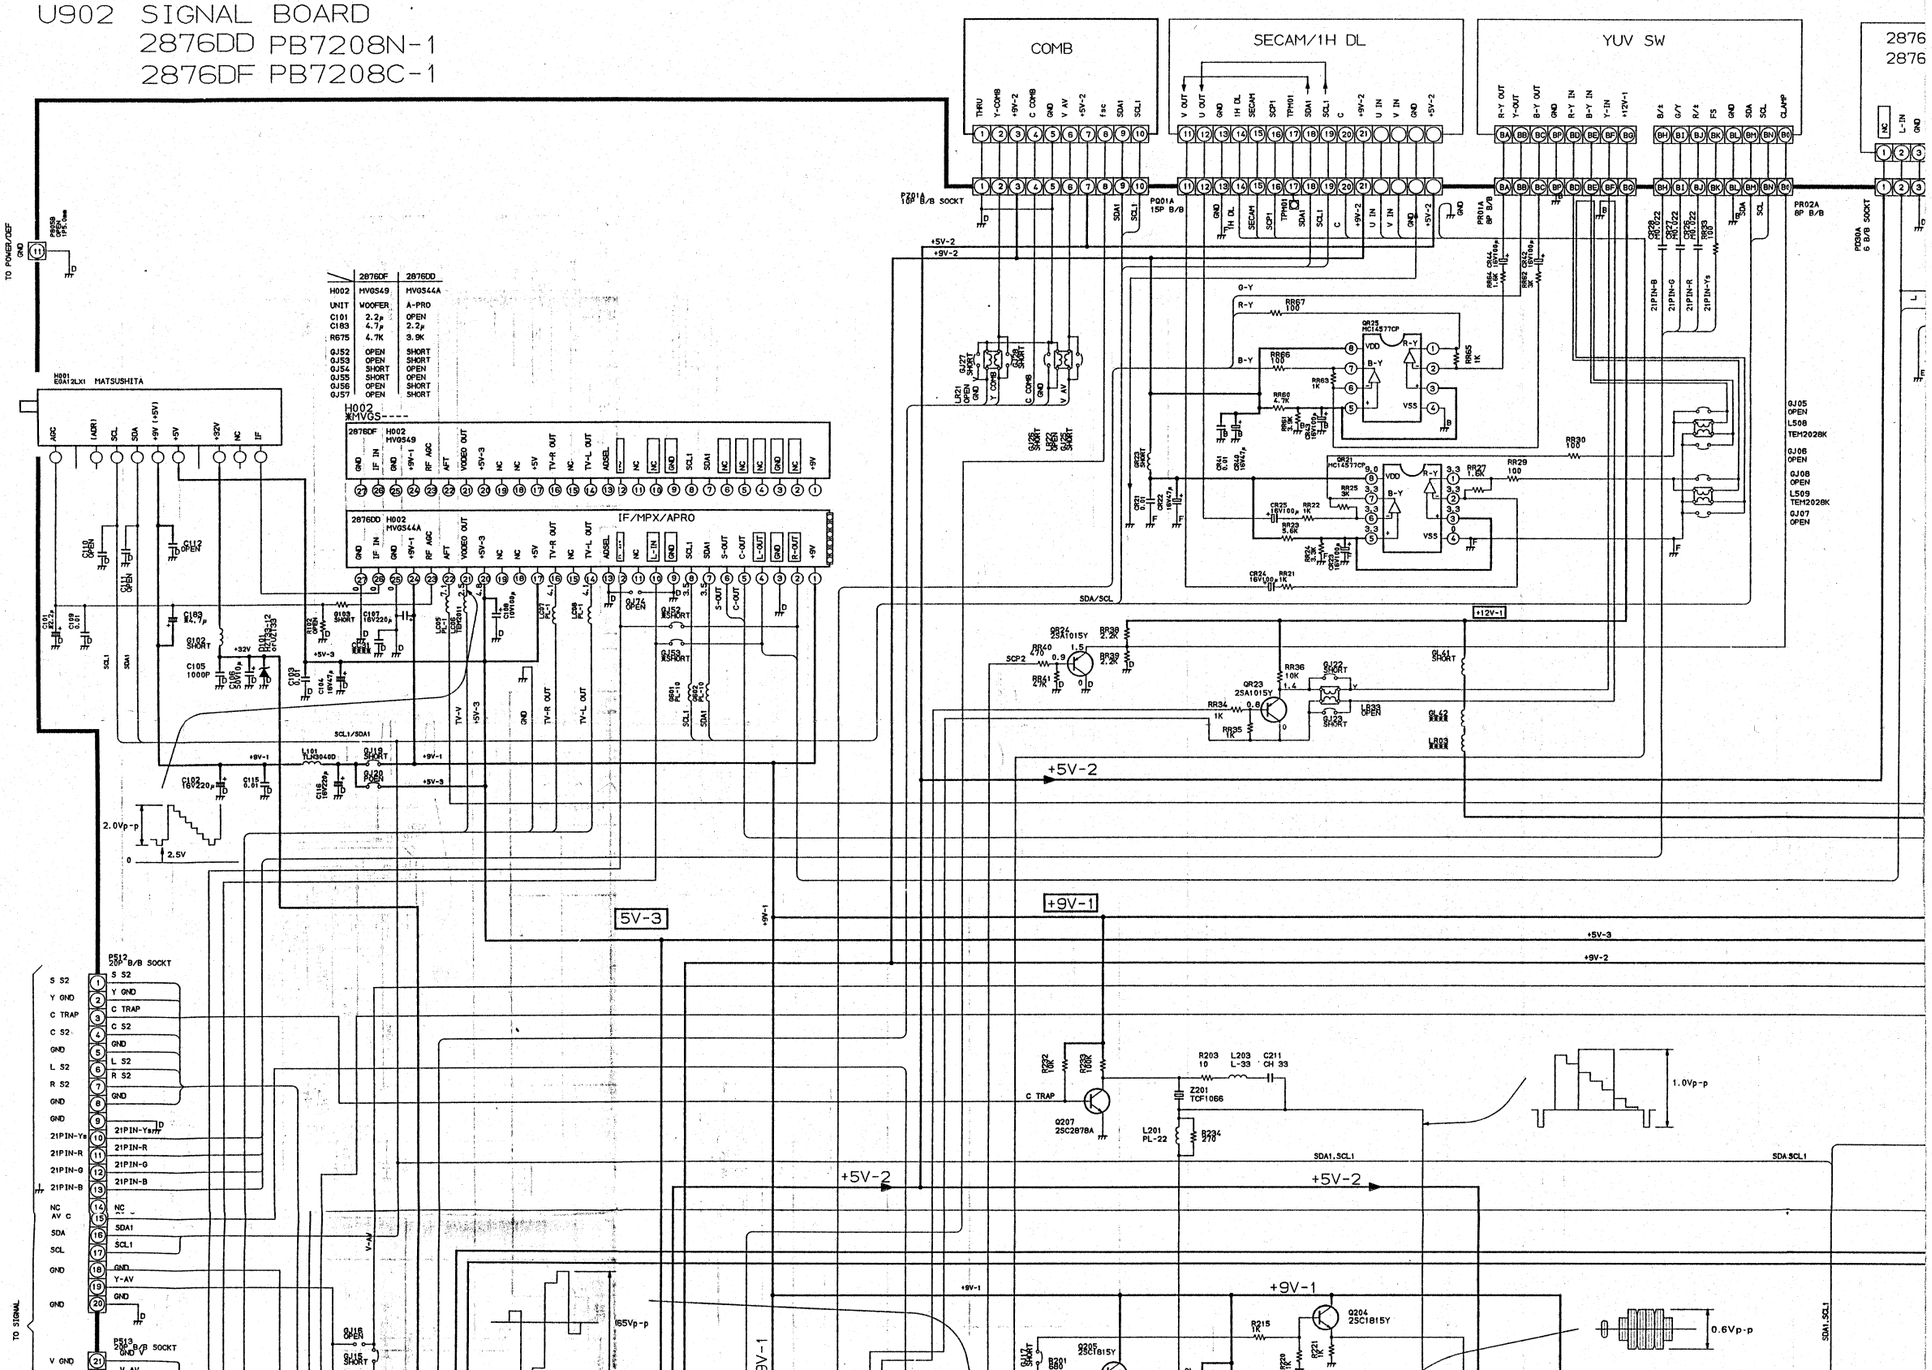

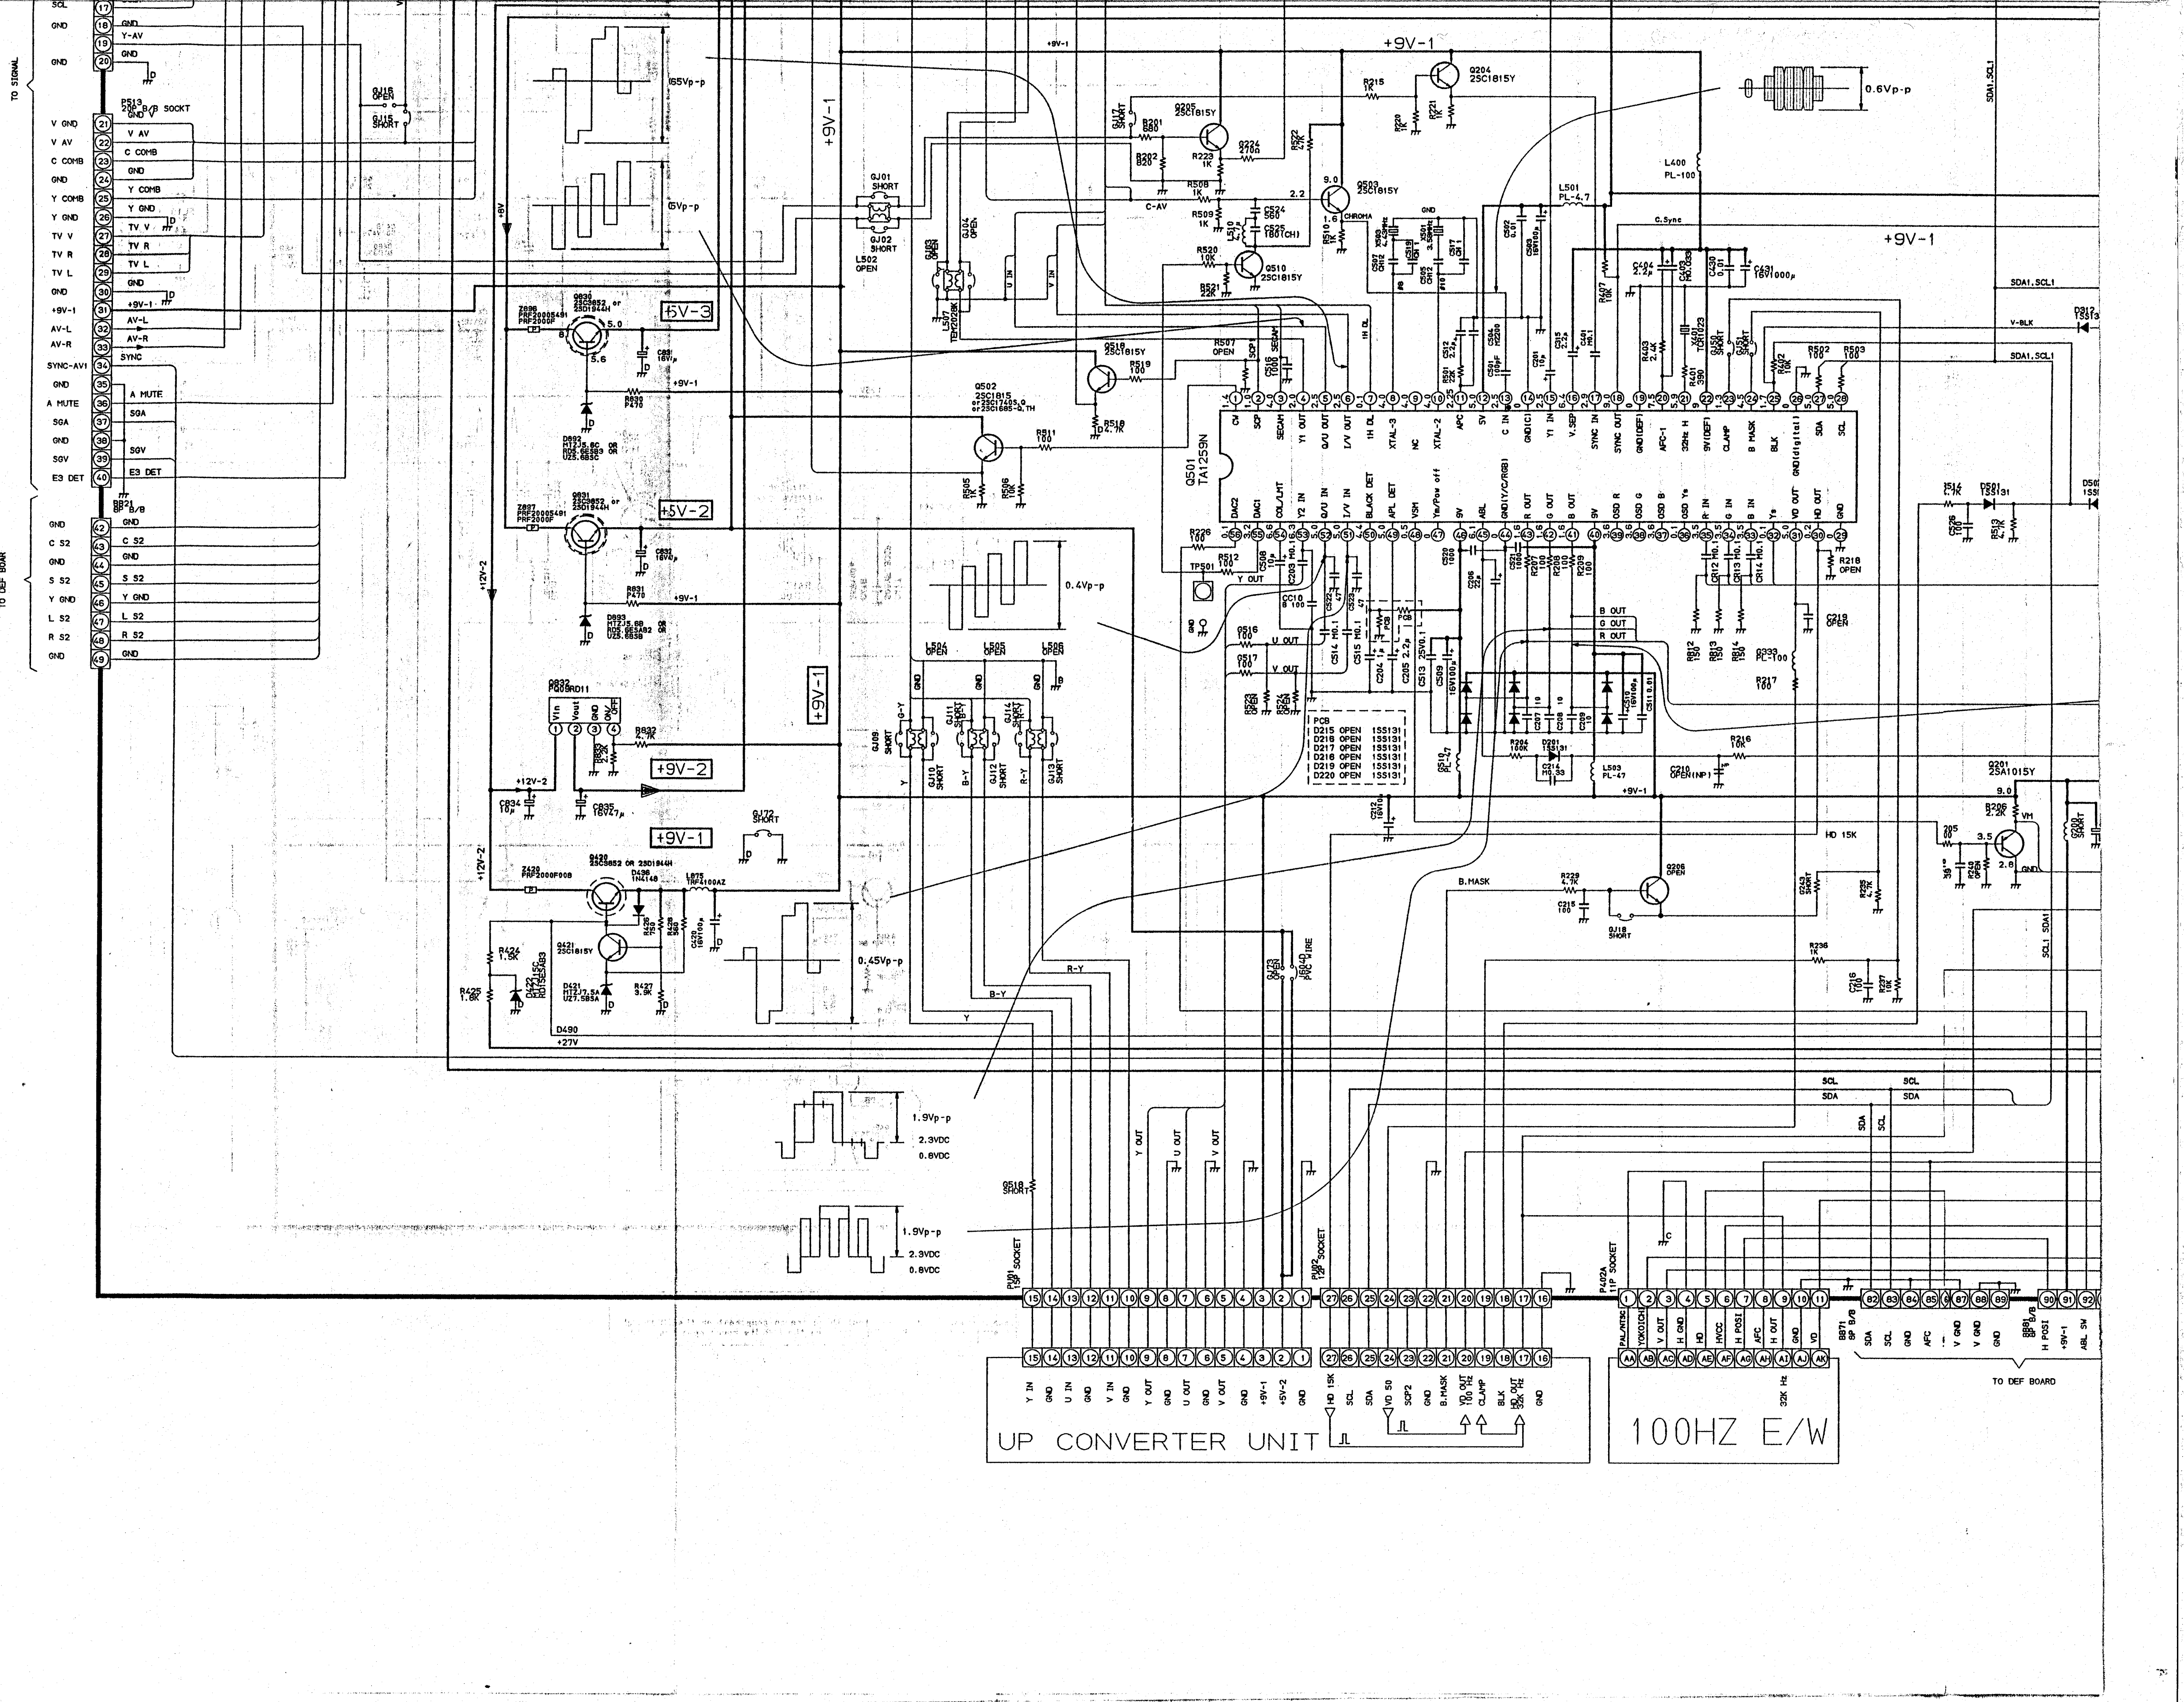
TO SIGNAL
TO DEF BOAR
P513 20P B/B SOCKT
BB21 8P B/B
Q501 TA1259N
+9V-1
+9V-2
+5V-2
+5V-3
+12V-2
+27V
0.6Vp-p
0.4Vp-p
0.45Vp-p
1.9Vp-p
2.3VDC
0.8VDC
PU01 15P SOCKET
PU02 12P SOCKET
P402A 11P SOCKET
BB71 8P B/B
BB81 8P B/B
TO DEF BOARD
UP CONVERTER UNIT
100HZ E/W

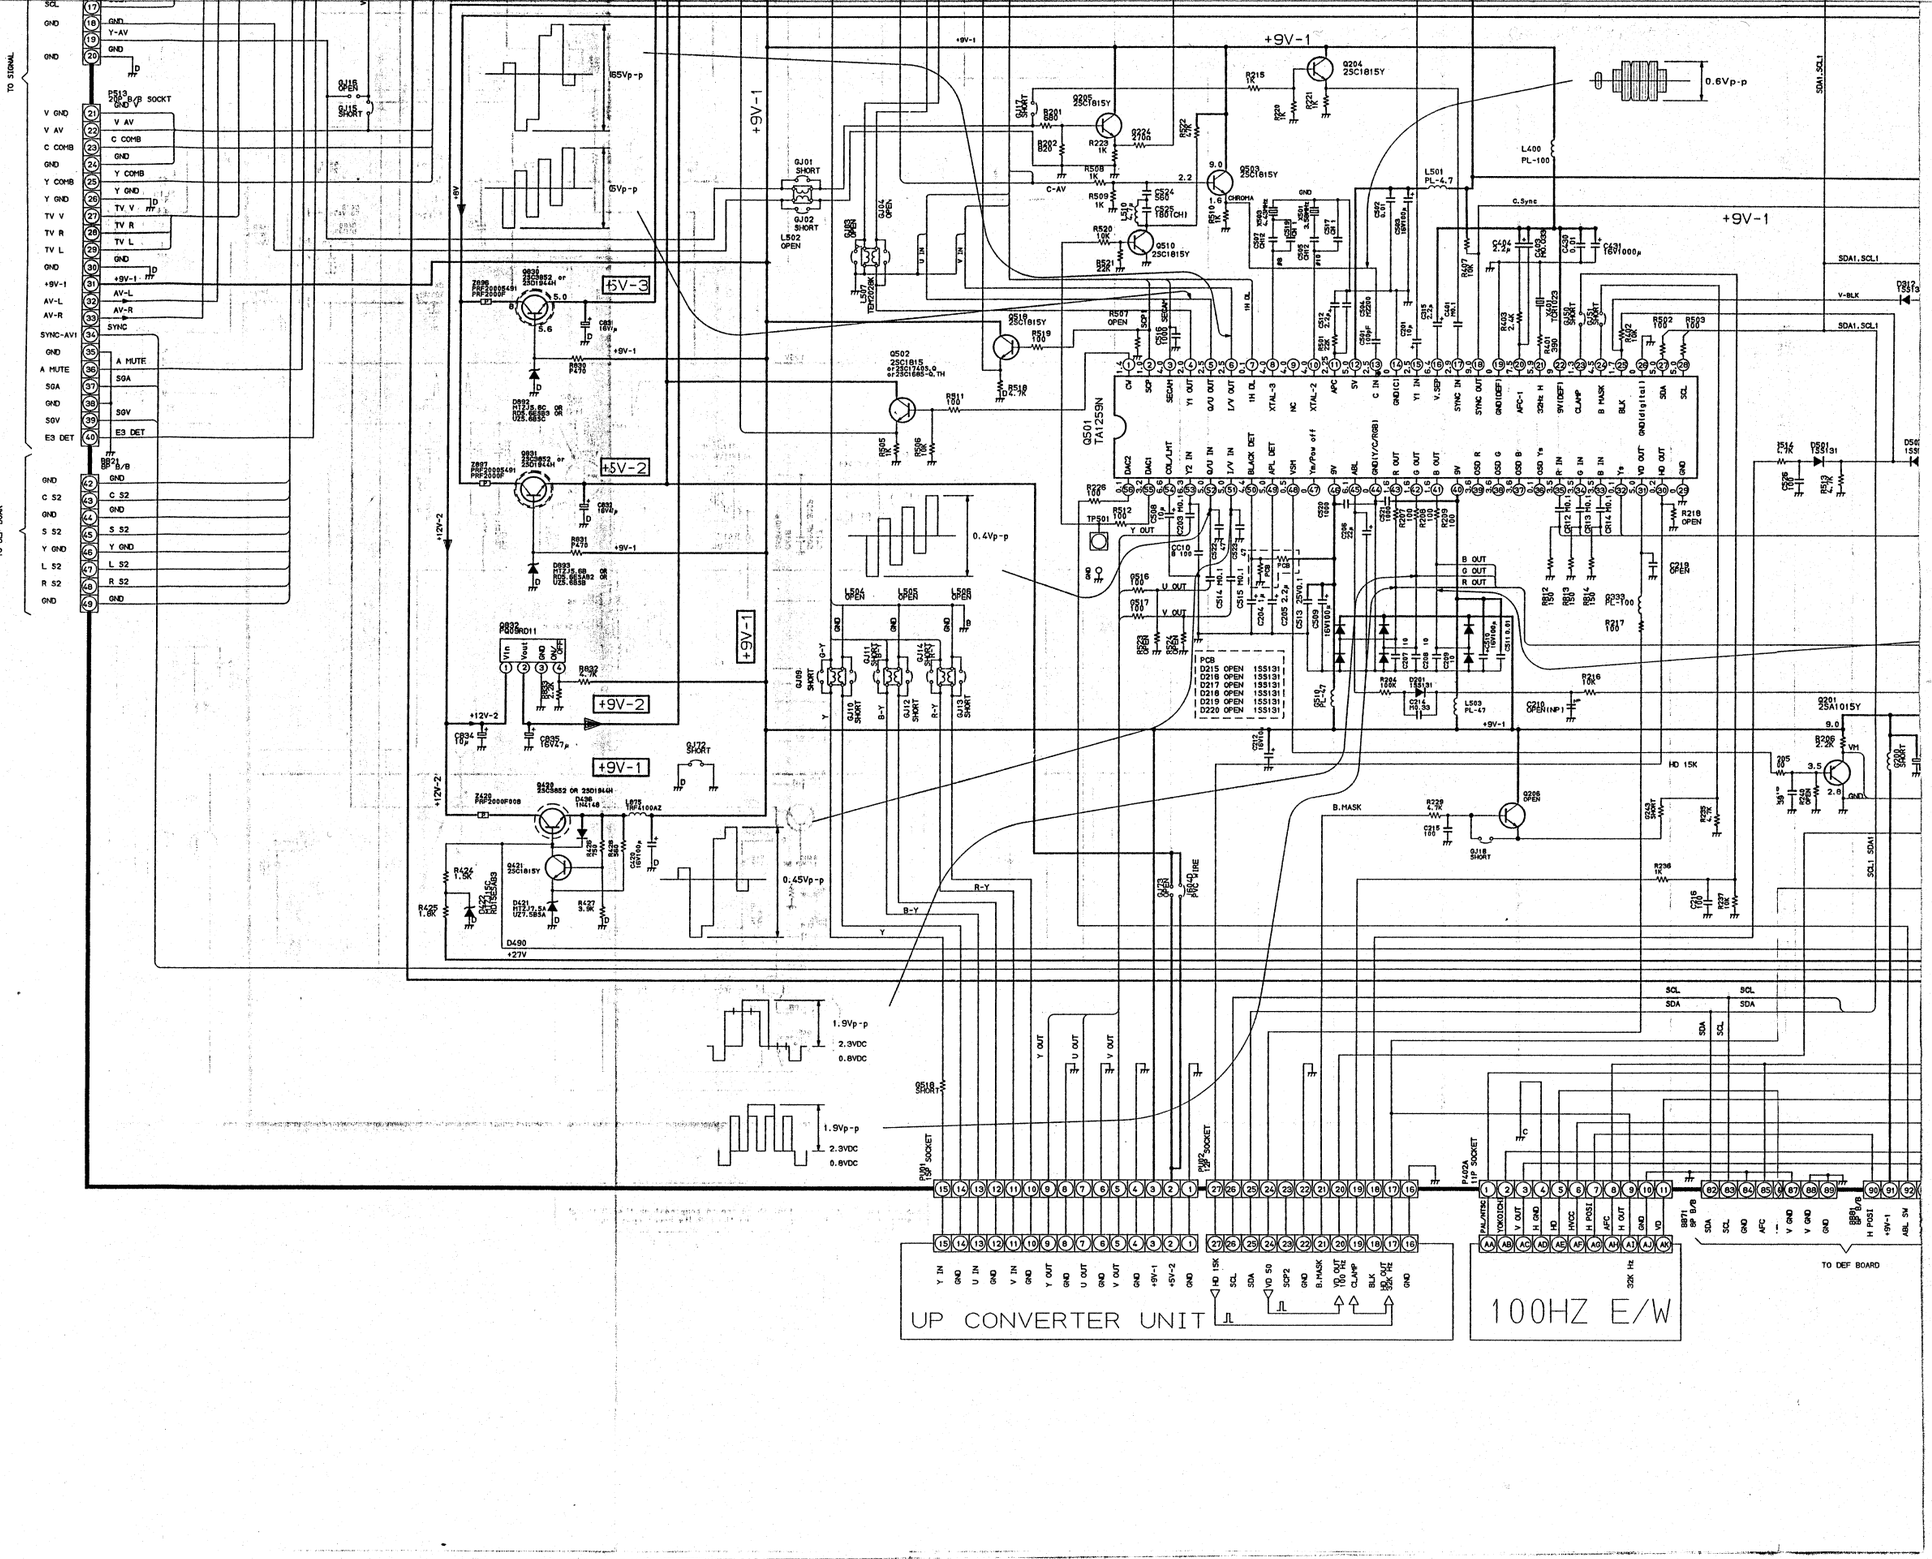
TO SIGNAL
TO DEF BOAR
SCL
GND
Y-AV
GND
V GND
V AV
C COMB
GND
Y COMB
Y GND
TV V
TV R
TV L
GND
+9V-1
AV-L
AV-R
SYNC-AV1
GND
A MUTE
SGA
GND
SGV
E3 DET
GND
C S2
GND
S S2
Y GND
L S2
R S2
GND
SCART A/B SOCKT
SYNC
SGV
S S2
C S2
R S2
Y S2
L S2
A MUTE
E3 DET
+9V-1
+5V-3
+5V-2
+12V-2
+9V-2
+9V-1
+27V
165Vp-p
65Vp-p
0.4Vp-p
0.45Vp-p
1.9Vp-p
2.3VDC
0.8VDC
+9V-1
+12V-2
+5V
+9V-1
+9V-2
+12V-2
+9V-1
+27V
+9V-1
+9V-1
+9V-1

OTES:

. D.C. resistance value of a principal transformer is shown in this schematic diagram. These are measured for separated from the circuit.
. The circuits are subject to change without notice.
. ● : Solder links.

EXPRESSION

VALUE OF RESISTOR, CAPACITOR and INDUCTOR

1. Resistance is shown in ohm, k=1,000, M=1,000,000
2. Unless other wise noted in schematic, all capacitor values less than 1 are expressed in μF and the values more than 1 in pF.
3. Unless otherwise noted in schematic, all inductor values more than 1 are expressed in μH, and the values less than 1 in H.

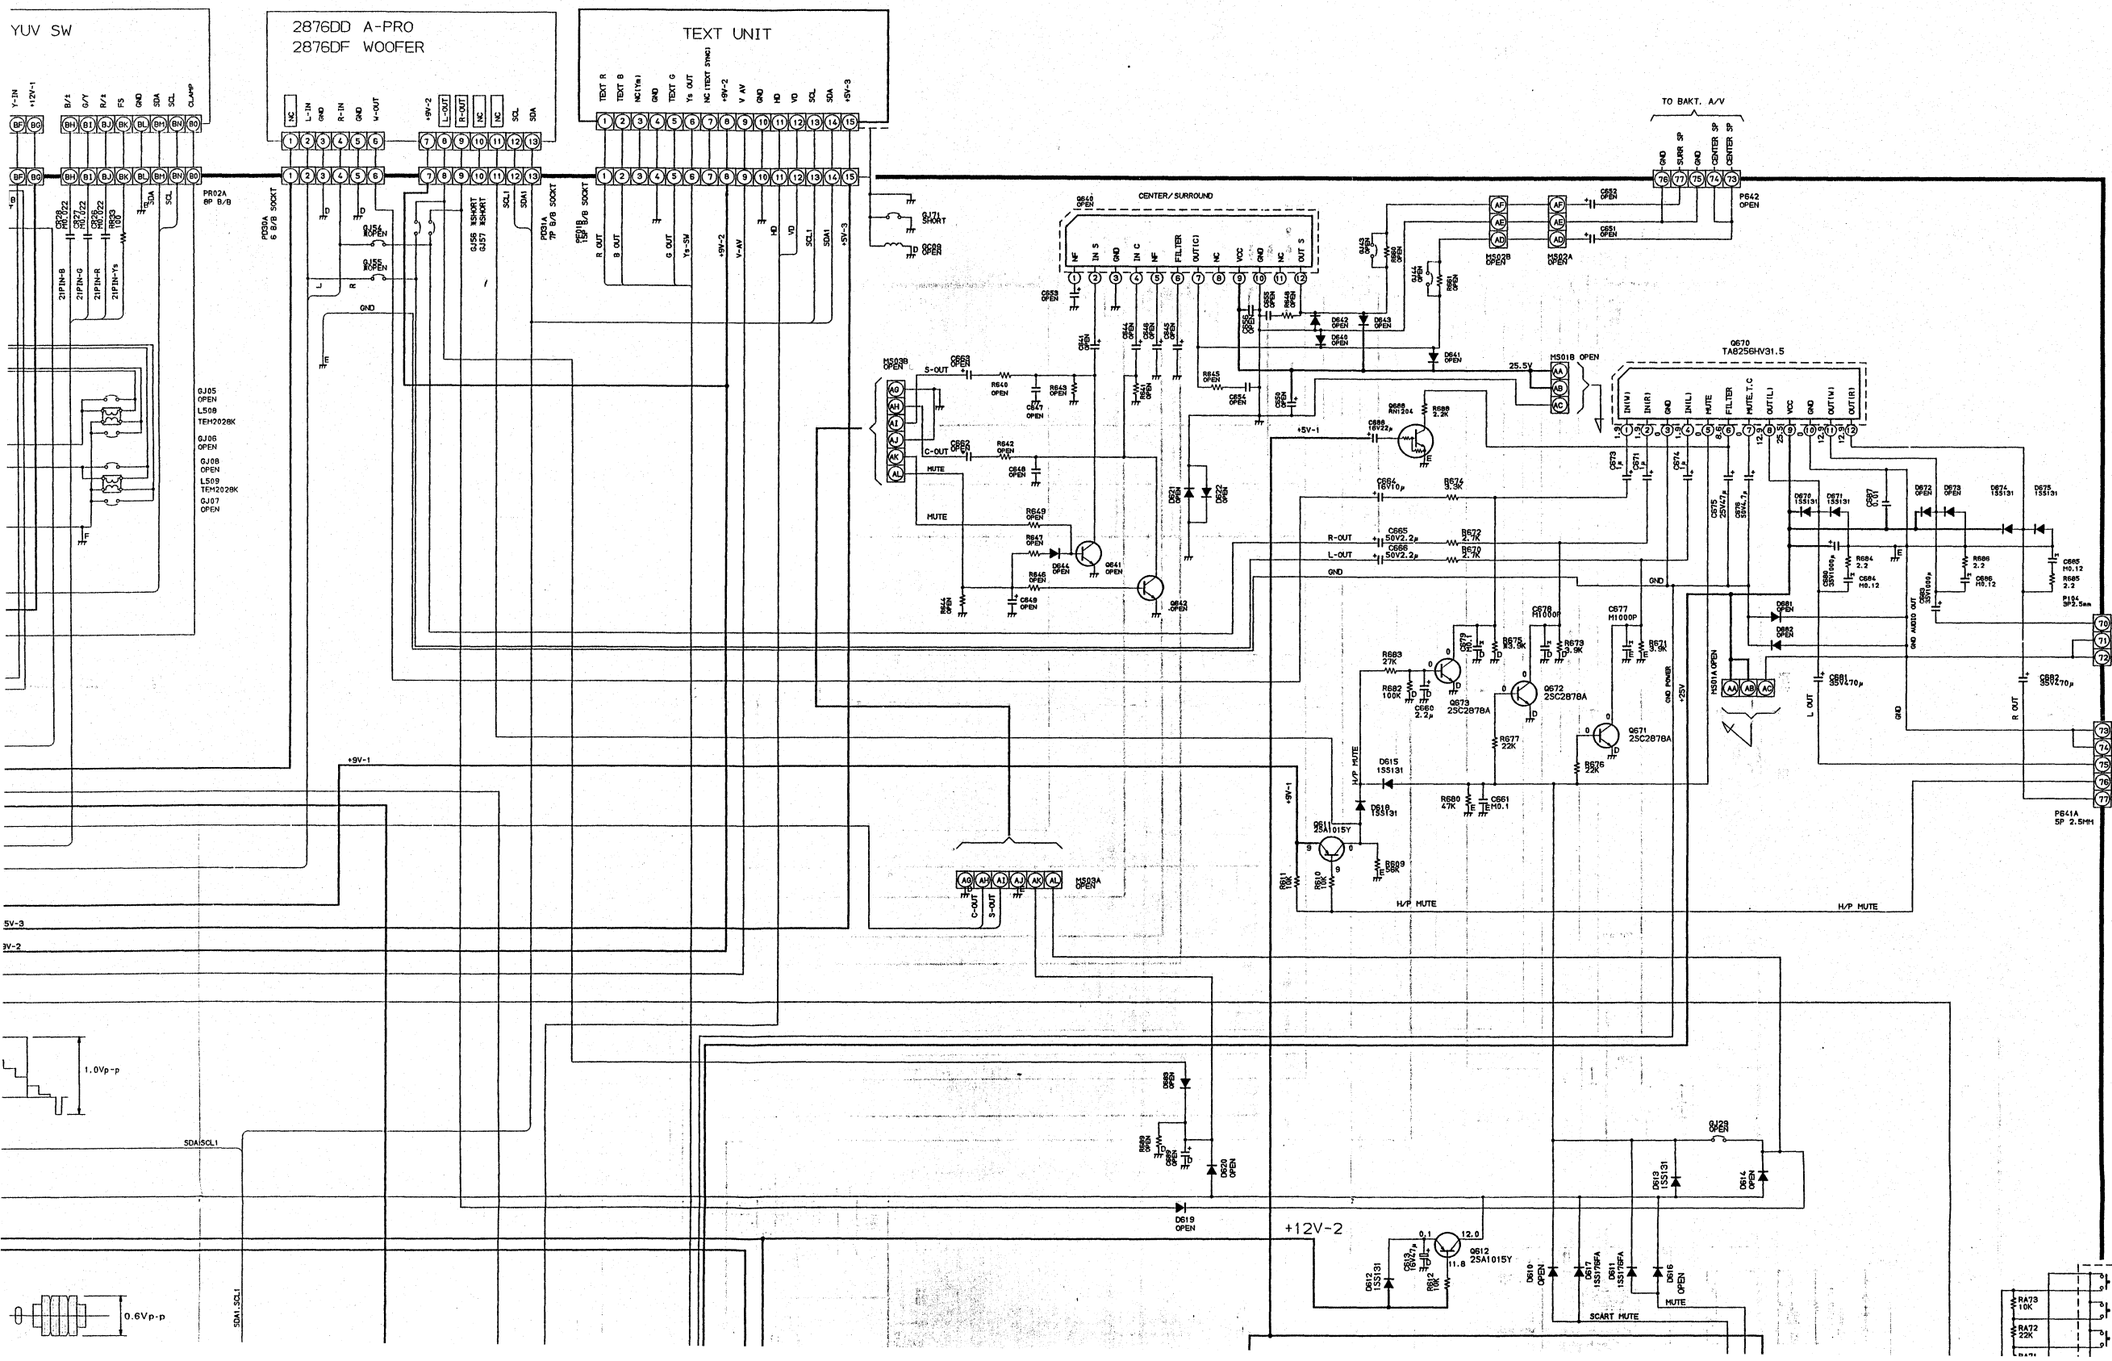

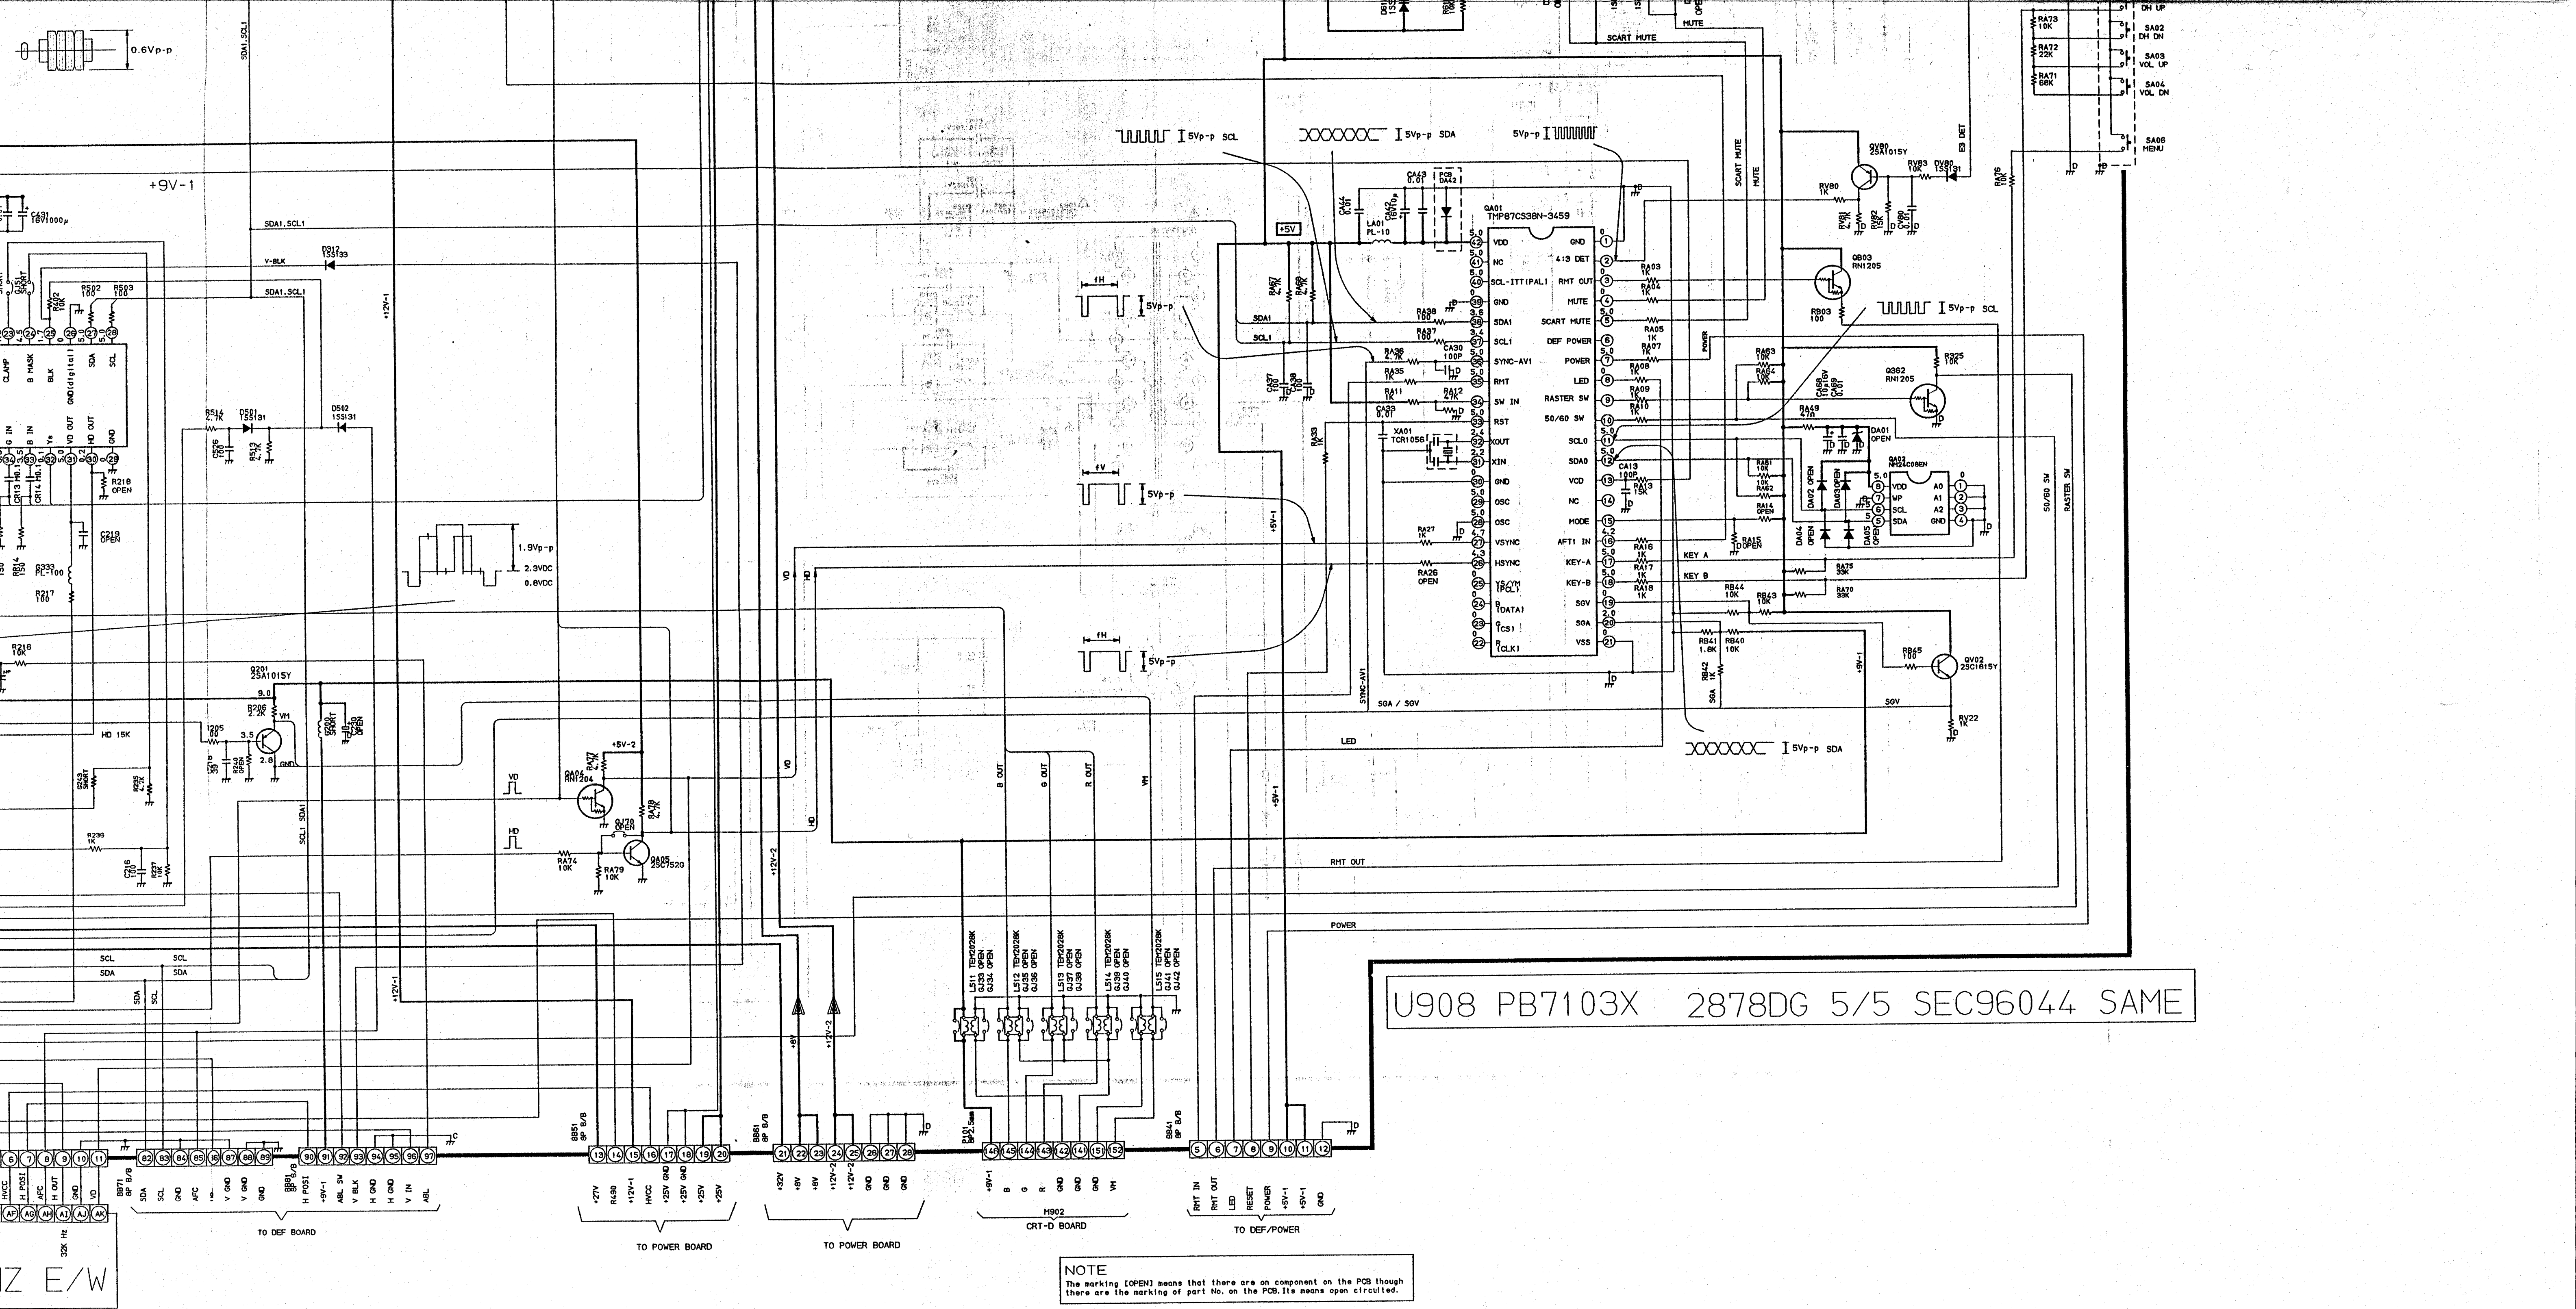

0.6Vp-p
+9V-1
SDA1.SCL1
V-BLK
D312 1SS133
C431 16V1000µ
R502 100
R503 100
R402 10K
GJ51 SHORT
CLAMP
B MASK
BLK
GND(digital)
SDA
SCL
G IN
B IN
Ys
VD OUT
HD OUT
GND
R514 4.7K
D501 1SS131
D502 1SS131
C526 100
R513 4.7K
R218 OPEN
CR13 M0.1
CR14 M0.1
C219 OPEN
G333 PL-100
RB14 150
R217 100
R216 10K
1.9Vp-p
2.3VDC
0.8VDC
Q201 2SA1015Y
R206 2.2K
R205 100
HD 15K
G200 SHORT
C230 OPEN
C218 39
R240 OPEN
G243 SHORT
R235 4.7K
R236 1K
C216 100
R237 10K
+12V-1
SCL1 SDA1
+5V-2
QA04 RN1204
RA77 4.7K
RA78 4.7K
GJ70 OPEN
QA05 2SC752G
RA74 10K
RA79 10K
VD
HD
+12V-2
5Vp-p SCL
5Vp-p SDA
fH
fV
5Vp-p
+5V
QA01 TMP87CS38N-3459
CA43 0.01
PC8 DA42
CA44 0.01
CA42 16V10µ
LA01 PL-10
RA67 4.7K
RA68 4.7K
RA38 100
RA37 100
RA36 4.7K
CA30 100P
RA35 1K
RA11 1K
RA12 47K
CA37 100
CA38 100
CA33 0.01
XA01 TCR1056
RA33 1K
RA27 1K
RA26 OPEN
VDD
NC
SCL-ITT(PAL)
GND
SDA1
SCL1
SYNC-AV1
RMT
SW IN
RST
XOUT
XIN
OSC
VSYNC
HSYNC
YS/YM (PCL)
B (DATA)
G (CS)
R (CLK)
4:3 DET
RMT OUT
MUTE
SCART MUTE
DEF POWER
POWER
LED
RASTER SW
50/60 SW
SCL0
SDA0
VCD
MODE
AFT1 IN
KEY-A
KEY-B
SGV
SGA
VSS
RA03 1K
RA04 1K
RA05 1K
RA07 1K
RA08 1K
RA09 1K
RA10 1K
CA13 100P
RA13 15K
RA15 OPEN
RA16 1K
RA17 1K
RA18 1K
KEY A
KEY B
RB44 10K
RB43 10K
RB41 1.8K
RB40 10K
RB42 1K
SGA / SGV
SYNC-AV1
+5V-1
D611 1SS
R611 10K
MUTE
SCART MUTE
RA73 10K
RA72 22K
RA71 68K
DH UP
SA02 DH DN
SA03 VOL UP
SA04 VOL DN
SA06 MENU
RA76 10K
QV80 2SA1015Y
RV80 1K
RV83 10K
DV80 1SS131
E3 DET
RV81 4.7K
RV82 15K
CV80 0.01
QB03 RN1205
RB03 100
RA63 10K
RA64 10K
R325 10K
Q362 RN1205
CA68 10µ16V
CA69 0.01
RA49 47Ω
DA01 OPEN
QA02 NM24C08EN
WP
A0
A1
A2
DA02 OPEN
DA03 OPEN
DA04 OPEN
DA05 OPEN
RA61 10K
RA62 10K
RA14 OPEN
RA75 33K
RA70 33K
50/60 SW
RASTER SW
RB45 100
QV02 2SC1815Y
SGV
RV22 1K
+9V-1
B OUT
G OUT
R OUT
VM
RMT OUT
POWER
L511 TEM2028K GJ33 OPEN GJ34 OPEN
L512 TEM2028K GJ35 OPEN GJ36 OPEN
L513 TEM2028K GJ37 OPEN GJ38 OPEN
L514 TEM2028K GJ39 OPEN GJ40 OPEN
L515 TEM2028K GJ41 OPEN GJ42 OPEN
+8V
BB71 8P B/B
BB81 8P B/B
BB51 8P B/B
BB61 8P B/B
P101 8P2.5mm
BB41 8P B/B
HVCC
H POSI
AFC
H OUT
GND
VD
32K Hz
Z E/W
SDA
SCL
GND
AFC
V GND
H POSI
+9V-1
ABL SW
V BLK
H GND
V IN
ABL
TO DEF BOARD
+27V
R490
+12V-1
HVCC
+25V GND
+25V
TO POWER BOARD
+32V
+8V
+12V-2
GND
TO POWER BOARD
B
G
R
VM
M902
CRT-D BOARD
RMT IN
RMT OUT
LED
RESET
POWER
+5V-1
TO DEF/POWER

U908 PB7103X 2878DG 5/5 SEC96044 SAME

NOTE
The marking [OPEN] means that there are on component on the PCB though there are the marking of part No. on the PCB. Its means open circuited.

SCHEMATIC DIAGRAM MODEL : 2876DD / 2876DF (2/4)

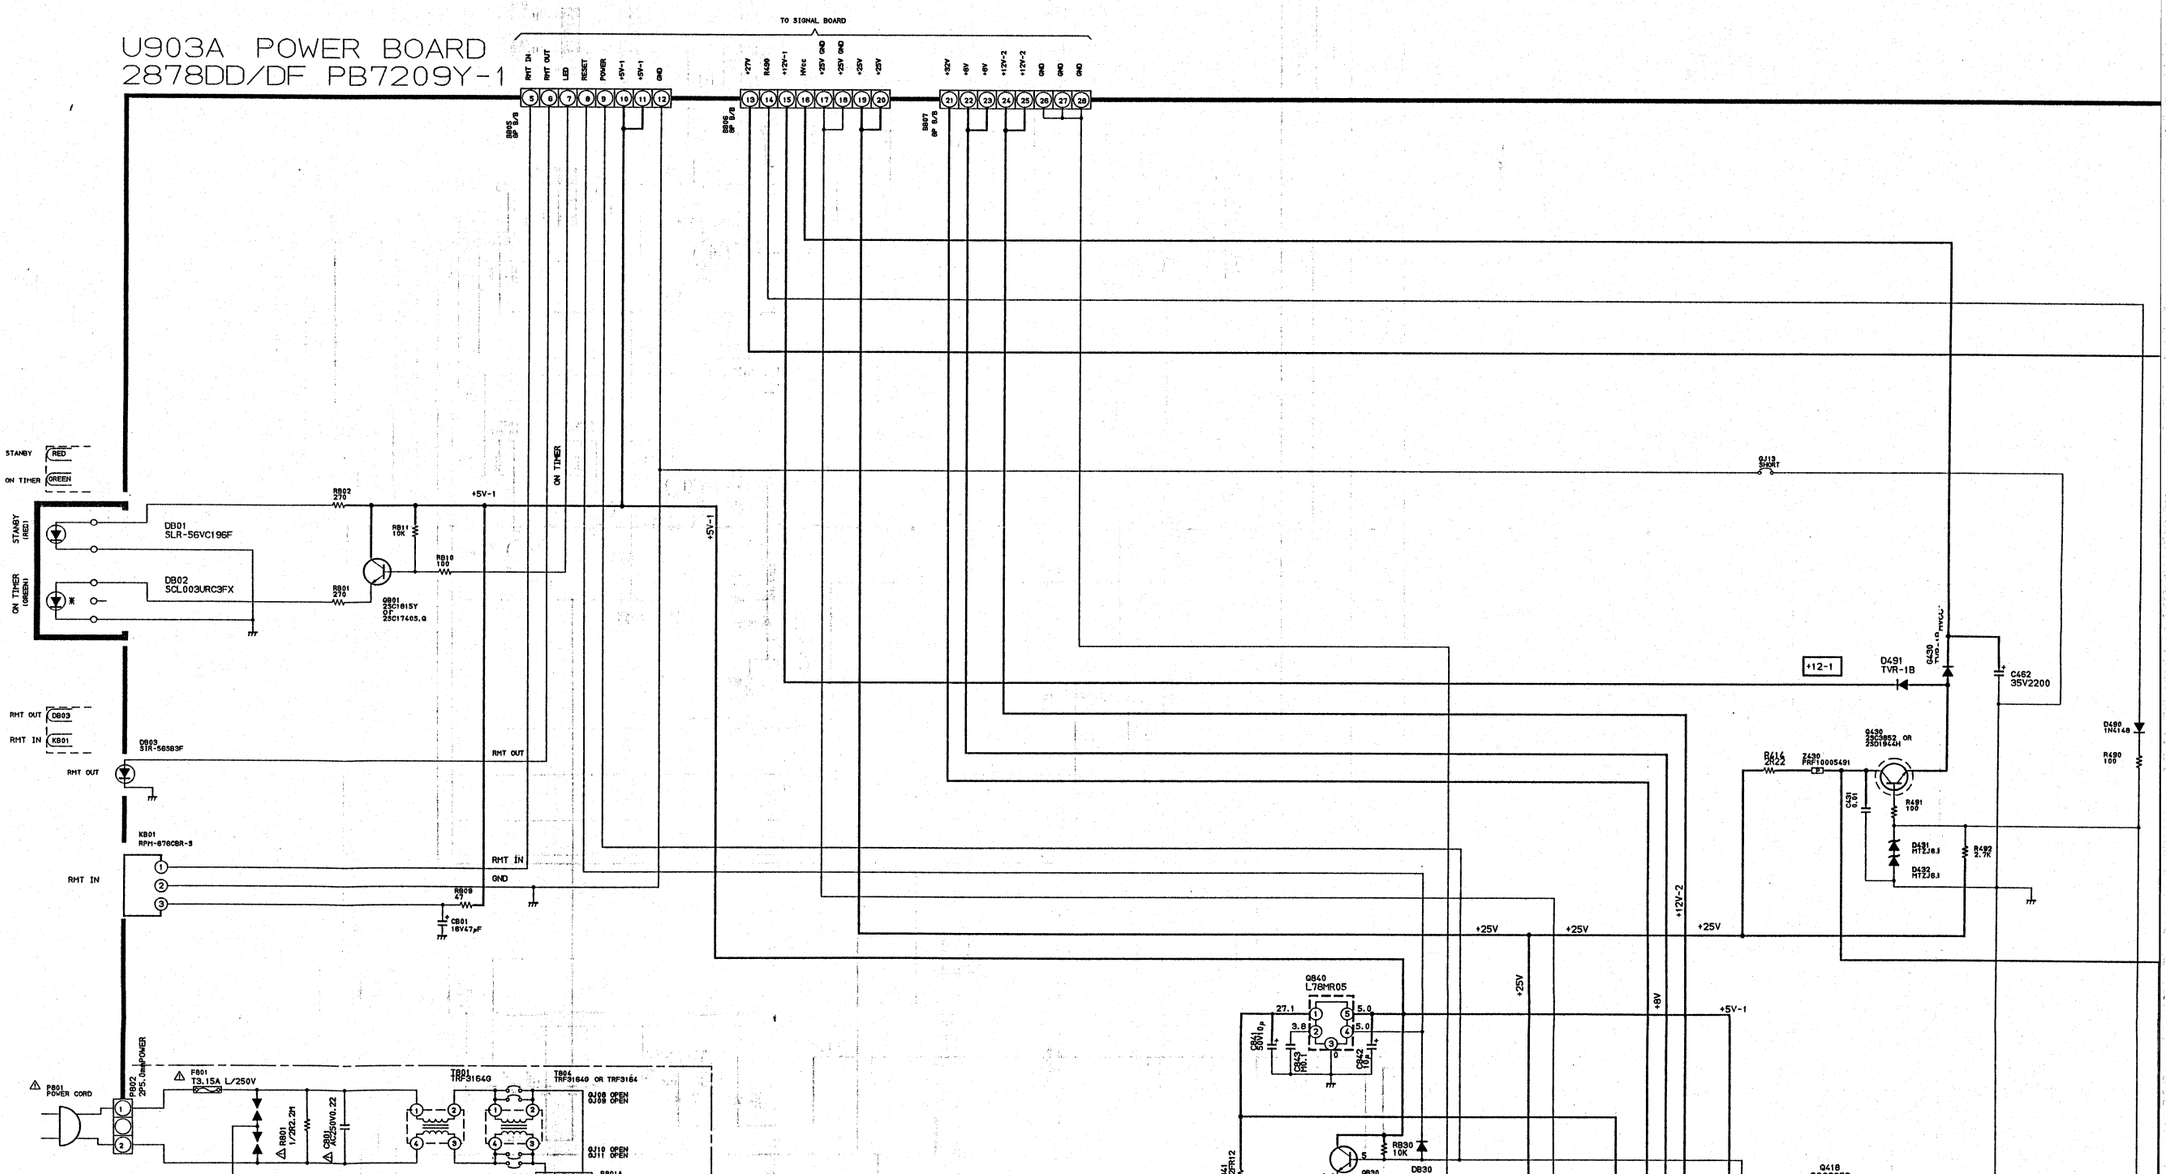

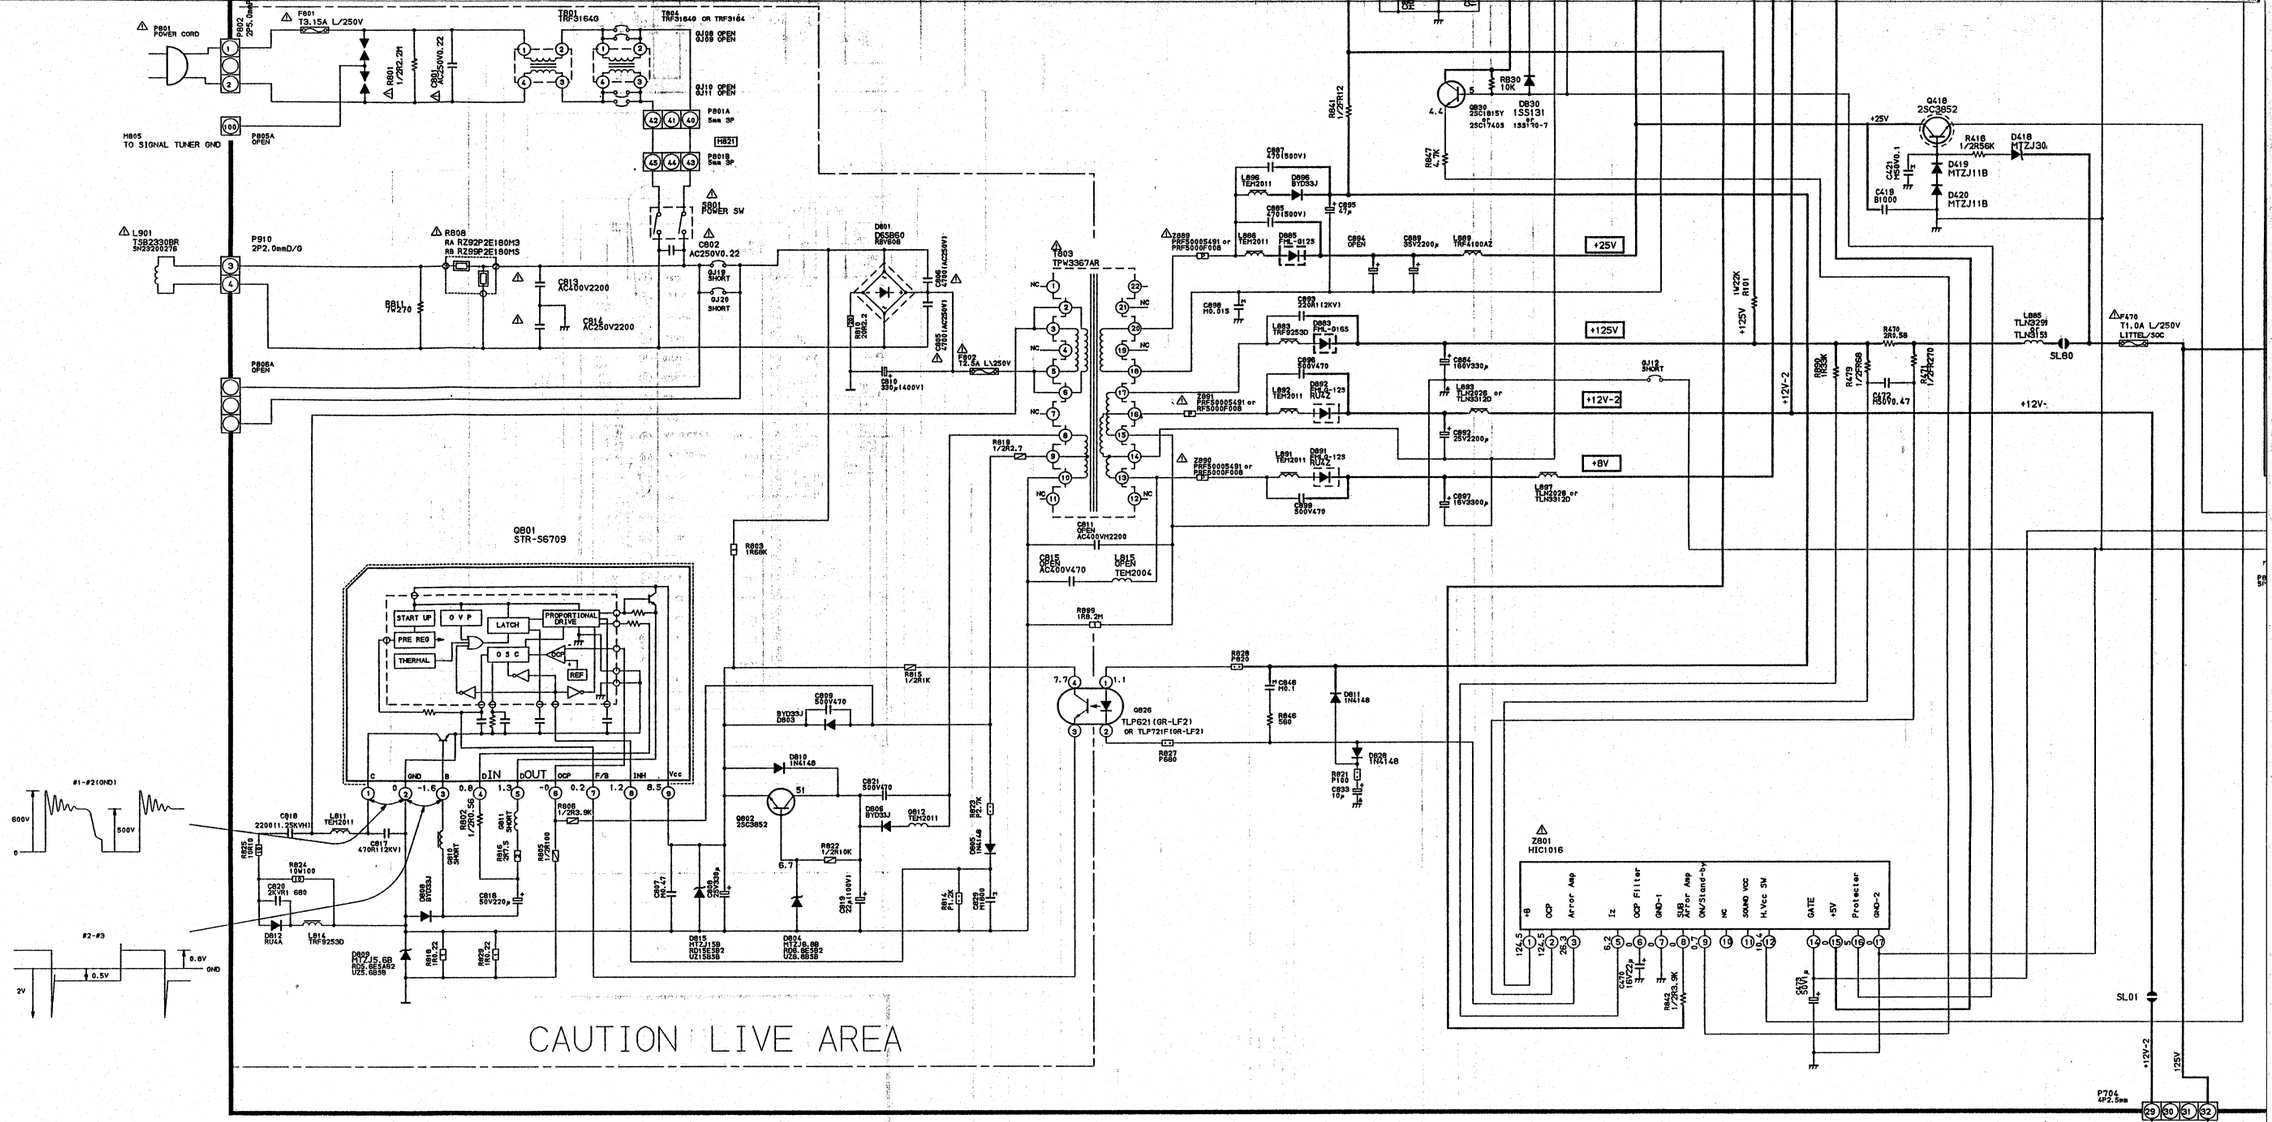
CAUTION LIVE AREA
Q801
STR-S6709
START UP
O V P
PRE REG
THERMAL
LATCH
PROPORTIONAL DRIVE
O S C
OCP
REF
C
GND
B
dIN
dOUT
OCP
F/B
INH
Vcc
#1-#2(GND)
#2-#3
600V
500V
0
2V
0.5V
0.8V
GND
T801
TRF3164O
T804
TRF3164O OR TRF3164
T803
TPH3367AR
Q801
Q802 2SC3852
Q803 2SC1815Y 2SC1740S
Q826 TLP621(GR-LF2) OR TLP721F(GR-LF2)
Z801 HIC1016
+B
OCP
Error Amp
Is
OCP Filter
GND-1
S/B Error Amp
ON/Stand-by
NC
SOUND VCC
H.Vcc SW
GATE
+5V
Protector
GND-2
+25V
+12V
+12V-2
+8V
+12V-
SL01
SL80
P704
TO CRT BAORD
H751
CAUTION LIVE AREA

U903B DEF BOARD
2876DD/DF PB7209Y-2

TO SIGNAL
TO SIGNAL
TO BACK A/V
TO SIGNAL BOARD
TO SIGNAL BOARD
(FRONT)
VIDEO 3
PV05 2P AV JACK
PV04 1P AV JACK
PV03 S-VIDEO
R L/MONO V
GND
Q302 TA8859CP
AGC RAMP T.C Vcc Vin GND V.FB SCL SDA
EHT EW EW FB GND V.D
D306 1N4148
D468 HT212A
L302 PL-100μ
50V(p-p)(V)
1.3V(p-p)(V)
1.2V(p-p)(V)
3.5V(p-p)(V)
Q301 LA7846N
THERMAL PROTECTION
AMP
PUMP UP
V BLK
+9V-1
+27V
+25V
+12-1
+12V-
+125V
GND
+200V
EHT
EF
ES
D491 TVR-1B
D490 1N4148
D431 HTZ6.8
D432 HTZ6.8
Q430 2SC3852 OR 2SD1943A1
Q418 2SC3852
D418 MTZJ30A
D419 MTZJ11B
D420 MTZJ11B
L880 TLN3299 TLN3159
SL80
△F470 T1.0A L/250V LITTEL/30C
Q402 2SC2235-OFA200
T401 TLN1080 H.DRIVE TRANS
BASE
Q404 2SC5144 H.OUT
270V(p-p)(H)
1050V(p-p)(H)
27V(p-p)(H)
150V(p-p)(H)
△T461 TFB4137AR
L482 (ITC)
V.DY
H.DY.
P401
6P2.5mmDY
M401
TO CRT D/M
HEATER
+200V
L301 TEH2011Y
L410 TEH2011
L411 TEH2011
L412 TEH2011
L413 TEH2011
L414 TEH2011
L415 TEH2011
L416 TEH2011
L417 TEH2011
L418 TEH2011
L419 TEH2011
L420 TEH2011
L421 TEH2011
L422 TEH2011
L423 TEH2011
L424 TEH2011
L425 TEH2011
L426 TEH2011
L427 TEH2011
L428 TEH2011
L429 TEH2011
L430 TEH2011
L431 TEH2011
L432 TEH2011
L433 TEH2011
L434 TEH2011
L435 TEH2011
L436 TEH2011
L437 TEH2011
L438 TEH2011
L439 TEH2011
L440 TEH2011
L441 TLN2158AY
L448 TLN3438AD

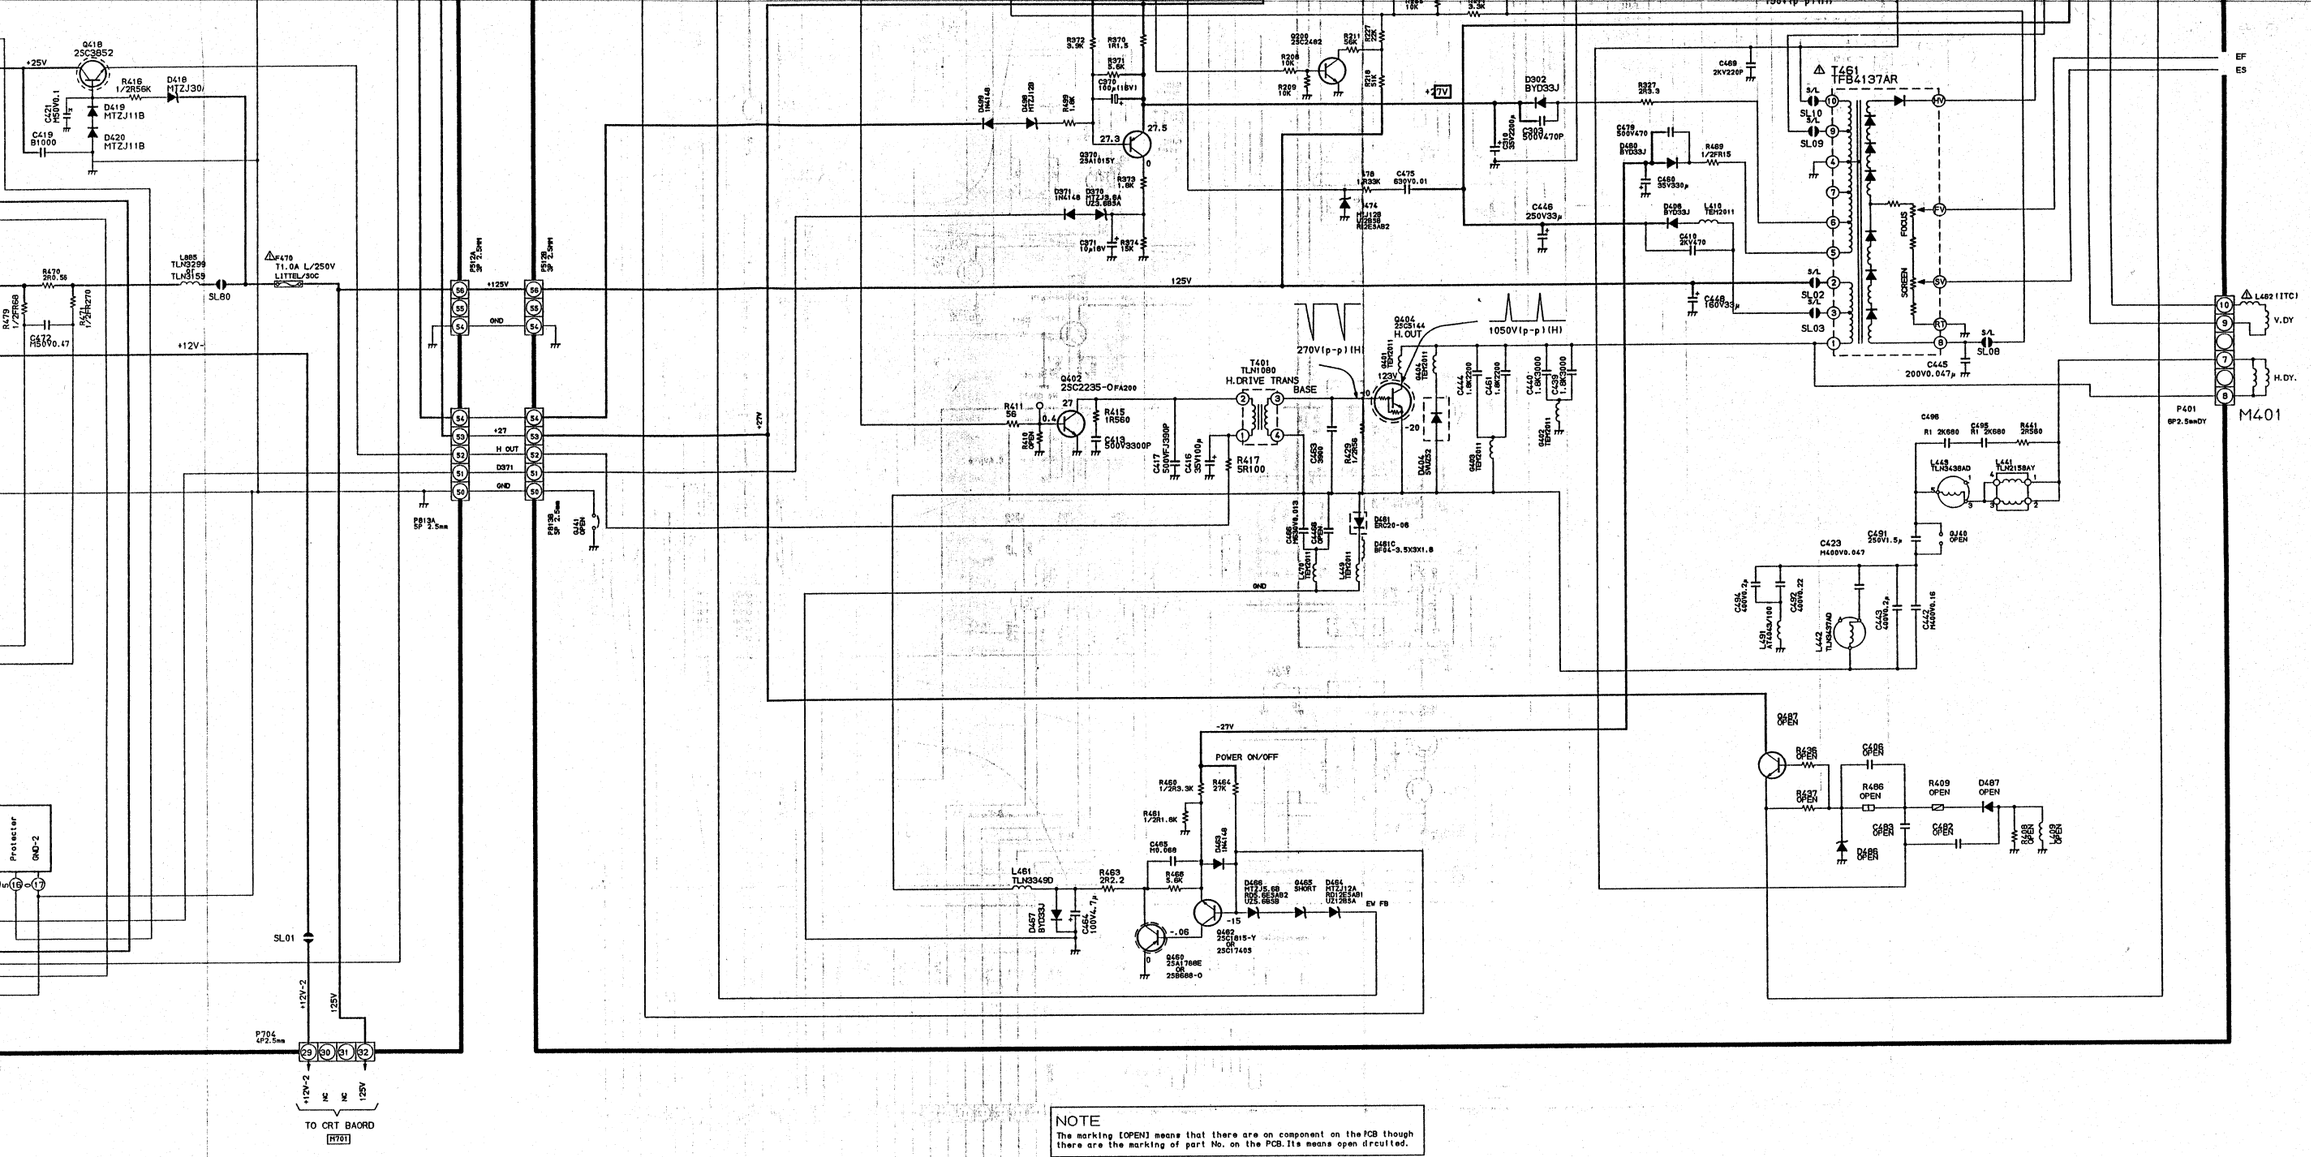

NOTE
The marking [OPEN] means that there are on component on the PCB though there are the marking of part No. on the PCB. Its means open drcuited.

SCHEMATIC DIAGRAM MODEL : 2876DD / 2876DF (3/4)

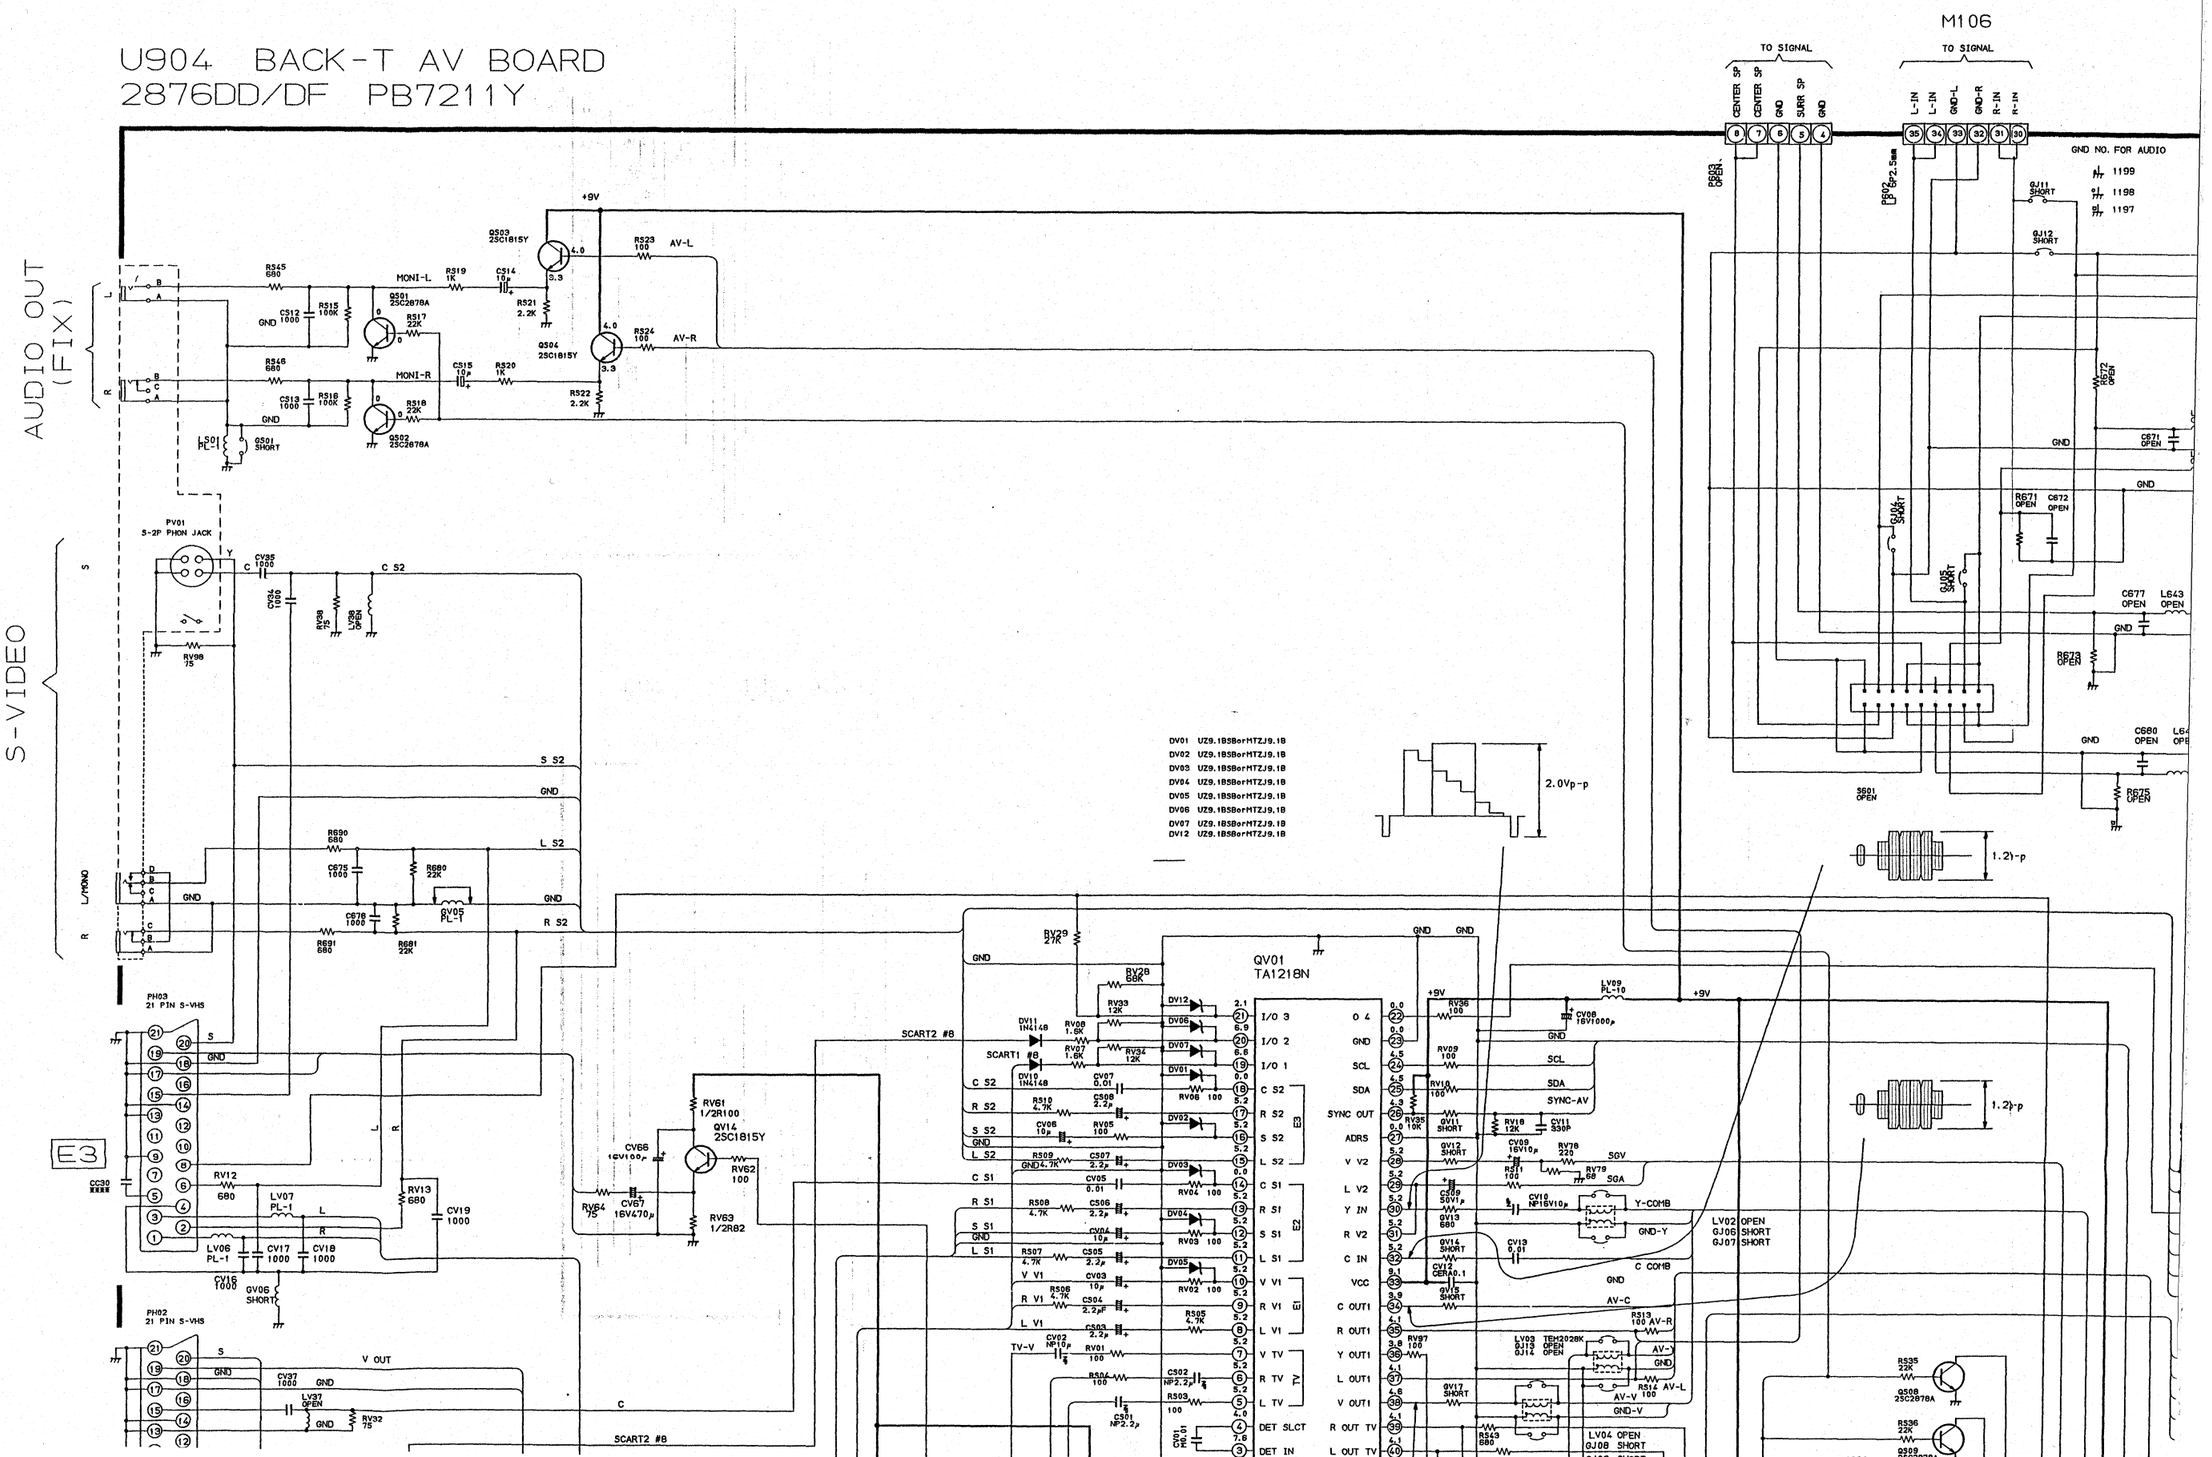

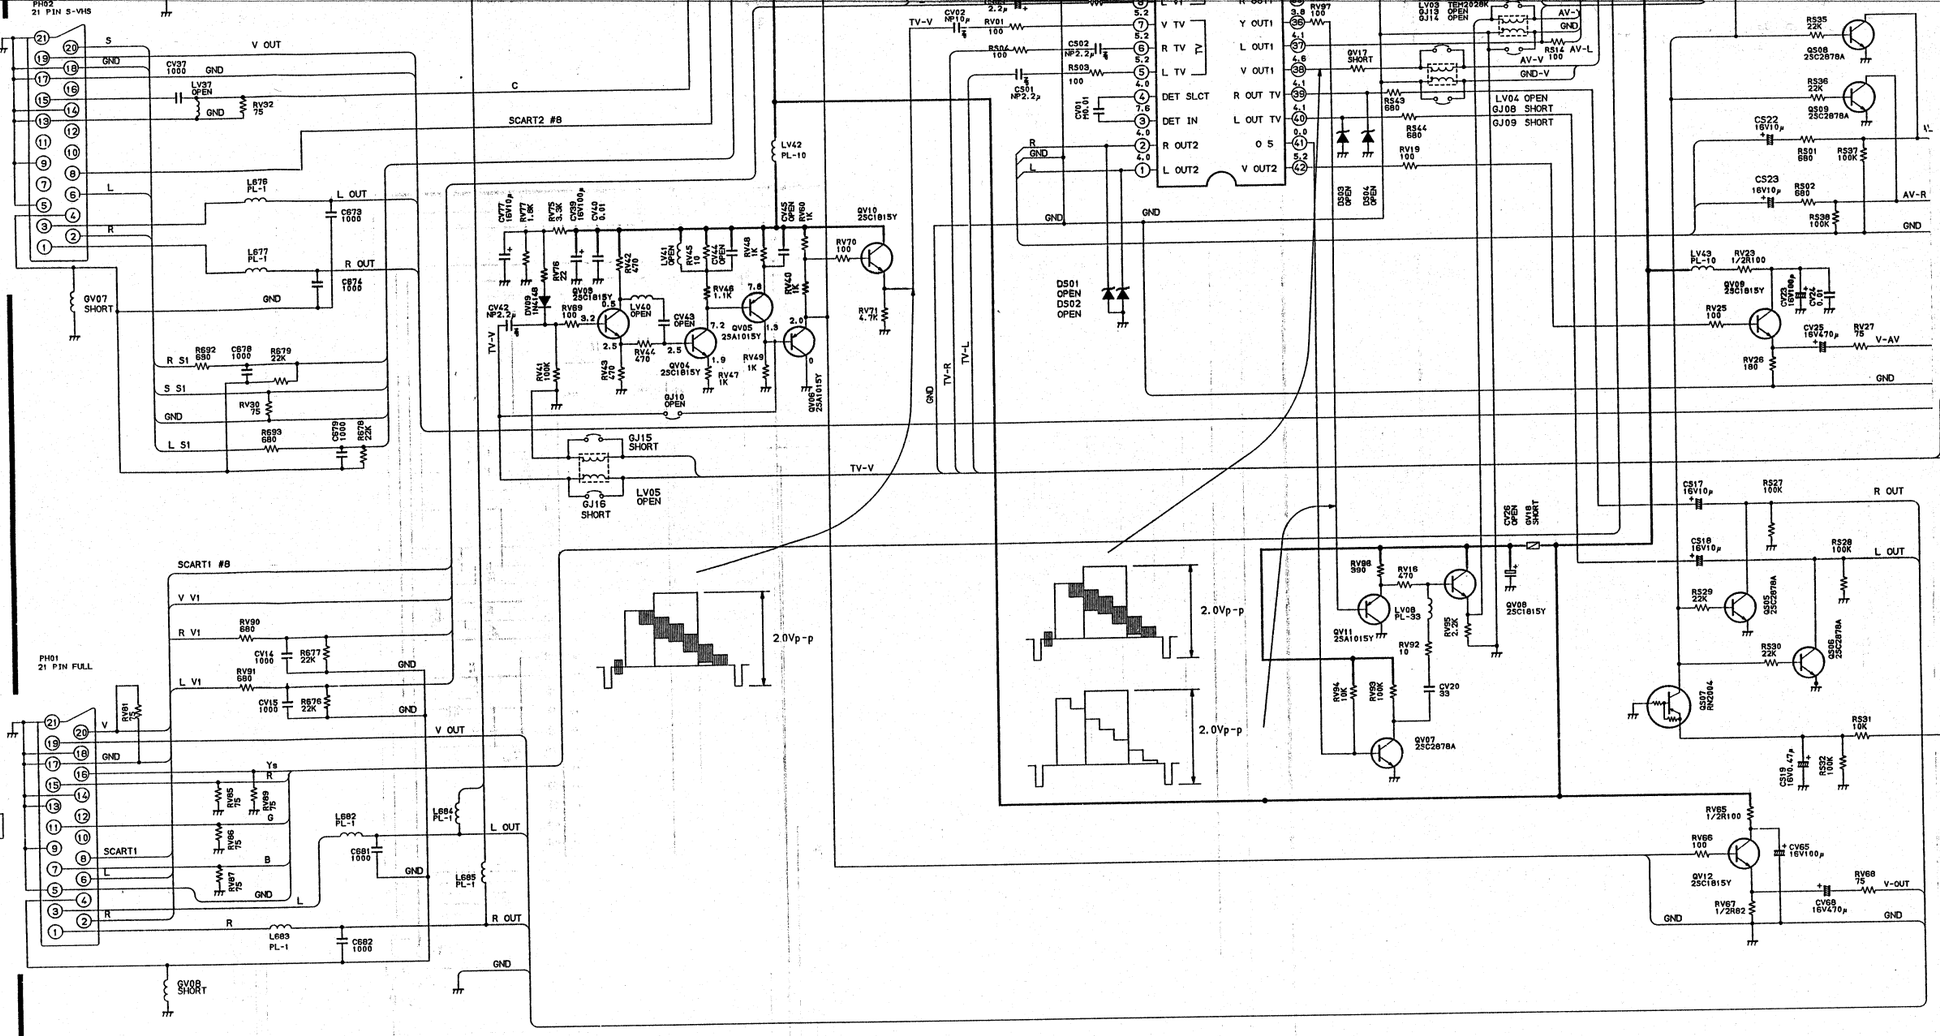
E2
E1
PH02
21 PIN S-VHS
PH01
21 PIN FULL
SCART2 #8
SCART1 #8
V OUT
C
L OUT
R OUT
GND
TV-V
TV-R
TV-L
2.0Vp-p
2.0Vp-p
2.0Vp-p
GJ15 SHORT
GJ16 SHORT
LV05 OPEN
GJ10 OPEN
LV04 OPEN
GJ08 SHORT
GJ09 SHORT
DS01 OPEN
DS02 OPEN
AV-V
AV-L
AV-R
GND-V
V-AV
V-OUT

: No.1197

U905 CRT-D/DSM BOARD
2876DD/DF PB7211Y

M106

TO SIGNAL

SIGNAL

GND SURR SP GND

L-IN L-IN GND-L GND-R R-IN R-IN

35 34 33 32 31 30

P602 LP 6P2.5mm

GND NO. FOR AUDIO

1199 1198 1197

GJ11 SHORT

GJ12 SHORT

M601

P601 LP 4P2.5mm

GND 26 27

GND 28 29

R-SP

L-SP

W661 SPK-1382 SN23351116

W662 SPK-1382 SN23351116

R672 OPEN

P004 OPEN

L671 OPEN

C671 OPEN C683 OPEN

L672 OPEN

C684 OPEN

R671 OPEN C672 OPEN

GJ04 SHORT

GJ08 SHORT

C677 OPEN L643 OPEN C685 OPEN

R673 OPEN

C680 OPEN L645 OPEN C686 OPEN

P905 5P

CENTER SP

SP01 OPEN

R675 OPEN

NOT USE

SURROUND-SP

1.2Vp-p

1.2Vp-p

LV01 OPEN GJ01 SHORT GJ02 SHORT

PV10B 20P B/B PLUG

1 S S2 S S2
2 GND GND
3 C TRAP
4 C S2 C S2
5 GND
6 L S2
7 R S2
8 GND
9 GND
10 21 PIN Ys
11 21 PIN R
12 21 PIN G
13 21 PIN B
14 NC
15 AV-C
16 SDA
17 SCL
18 AV-Y
19 AV-Y
20 GND

AV-Y GND AV

PV11B 20P B/B PLUG

21 GND
22 AV-V

TO SIGNAL

R535 22K Q508 2SC2878A

R536 22K Q509 2SC2878A

CS22 16V10μ R501 680 R537 100K AV-L

CS23 16V10μ R502 680 R538 100K AV-R

GND

LV49 PL-10 RV23 1/2R100

QV09 2SC1815Y

RV25 100

D701 1SS131 or 1SS120-7

C721 16V47μ

C722 16V100μ

M902 To SIGNAL

VH GND GND GND R G B +9V-1

52 51 50 49 48 47 46

GJ03 SHORT

GJ02 SHORT

P902 8P2.5mm

L908 PL-10

+9V-1

C915 0.1

M1701 To DEF/PWR

125V 12V-2

54 55 56 57

P701 4P2.5mm

Q705 2SC1815Y or 2SC1740S,Q or 2SC1685-Q,TH

C707 16V47μ

Q706 2SC1815Y or

R712 100

11.5

104Vp-p

102Vp-p

103Vp-p

TP46R TP46G TP46B

RED CUT OFF

GREEN CUT OFF

BLUE CUT OFF

GREEN DRIVE

BLUE DRIVE

R904 4.7K

Q901 2SC4544 or 2SC5147 R905 15

TP47R

D907 1SS131 or 1SS120-7 Q915 OPEN

R912 OPEN D904 1N4148 D912 OPEN

Q902 2SC1815Y or 2SC1740S,Q or 2SC1685-Q,TH

R916 33 R915 100 R914 100 R918 10 R917 180 C904 470 C903 OPEN C914 0.01

TP47G

Q903 2SC4544 or 2SC5147

R919 OPEN D908 1SS131 or 1SS120-7 Q916 OPEN D905 1N4148 D913 OPEN

Q904 2SC1815Y or 2SC1740S,Q or 2SC1685-Q,TH

R946 33 R922 100 R921 100 R924 10 R925 180 C905 470 C906 OPEN

TP47B

Q905 2SC4544 or 2SC5147

R926 OPEN D909 1SS131 or 1SS120-7 Q917 OPEN D906 1N4148 D914 OPEN

Q906 2SC1815Y or 2SC1740S,Q or 2SC1685-Q,TH

R945 33 R929 100 R928 100 R930 10 R927 180 C907 470 C908 OPEN

R910 OPEN

L912 PL-15 R906 1K R942 3.9K L902 100μ R960 2R15K R961 2R15K R962 2R15K R869 100 L905 PL-22 R870 100 L906 PL-22 R907 1K L913 PL-15 R943 3.9K L903 100μ R863 2R15K R864 2R15K R865 2R15K R871 100 L907 PL-22 R908 1K L914 PL-15 R944 3.9K L904 100μ R866 2R15K R867 2R15K R868 2R15K

C930 500V100

R901 V2R820 R902 V2R820 R903 V2R820

V901 A66EAK552X54

G4 G3 G2 G1

C913 OPEN C980 OPEN

EV FOR 32DW FV

R950 OPEN

T461 C100

V901A C902 2KV4700

D911 D933J

P906 OPEN

SV

(HEATER)

C931 500V100 R992 15 R920 1FR4.7 L911 100

C909 250V22μ

P903 9P

166 GND
165 BLK
164 NC
163 Heater
162 NC
161 NC
160 200V
159 200V

To DEF/PWR M903

R877 680 R935 820 R909 2.2K D903 1SS131 or 1SS120-7 R980 470 1.7 Q911 2SA1015Y R982 10K R984 1.5K R987 680 R988 4.7K

R934 330 D910 1SS131 or 1SS120-7 C911 16V10μ R932 3.3K Q907 2SA952TH-Y C920 H0.1 R981 820 R989 3.3K

C913 16V1000μ C917 16V1000μ R939 100 R983 2.2K R985 470 R986 680

R933 75 R936 75 C910 50V0.47μ D901 1N4148 Q908 2SC2120Y Q910 2SC1815Y or 2SC1740S,Q or 2SC1685-Q,TH C921 H0.1 R991 680 R990 2.2K

L910 PL-1

R731 1R330

C712 16V47μ C713 16V0.01μ

Q719 2SC1959-Y

D704 1SS131 or 1SS120-7 R737 1.5K R744 1.2K

R736 56 R742 2.7 C721 16V47μ D707 OPEN

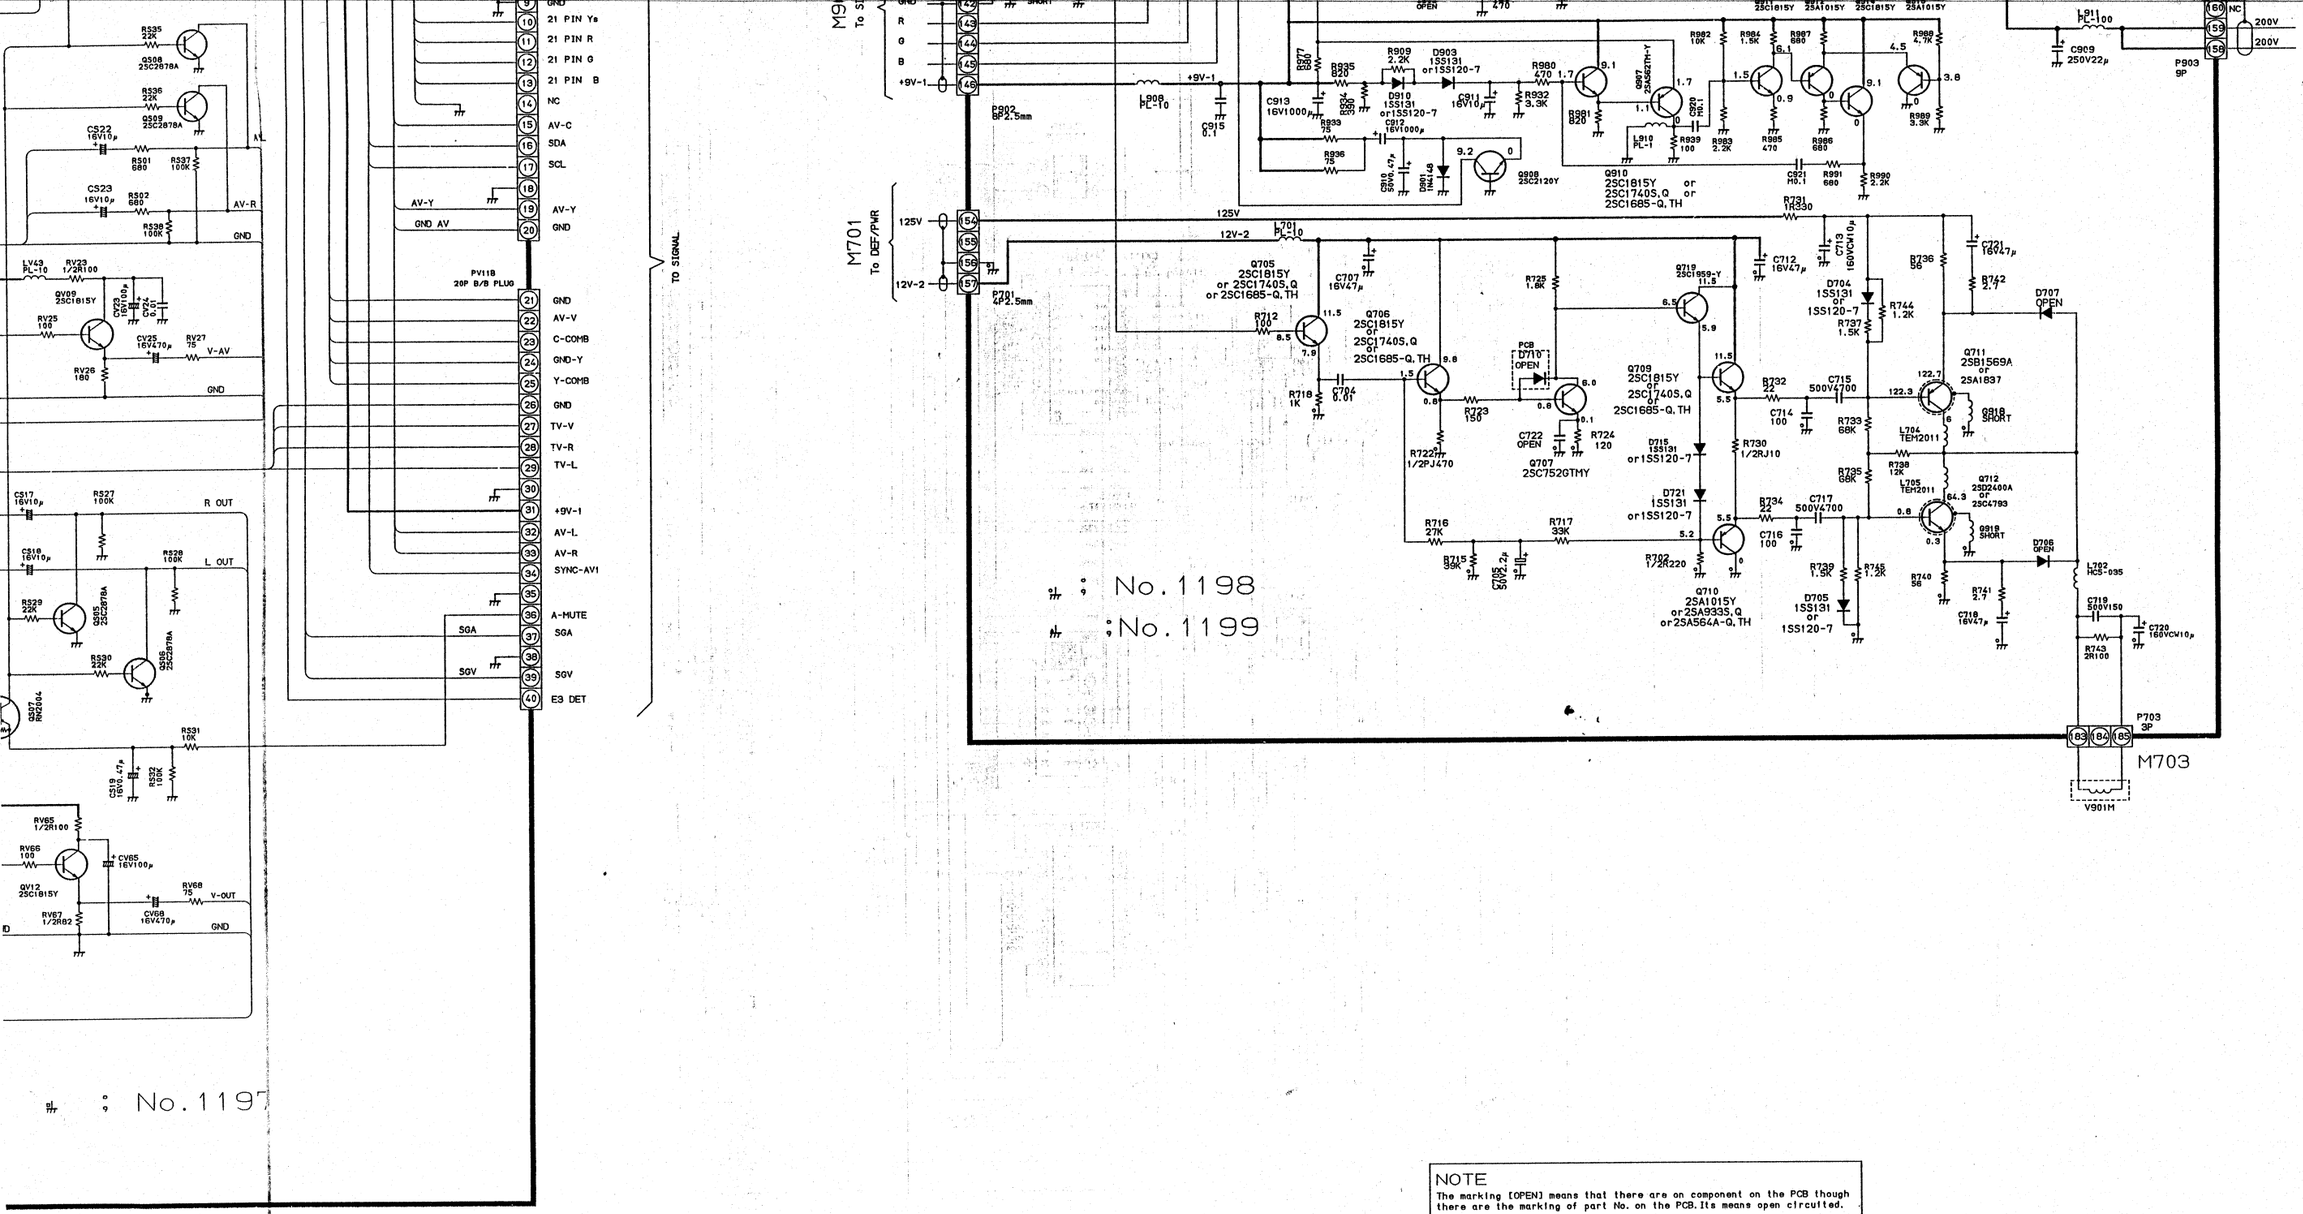

NOTE
The marking [OPEN] means that there are on component on the PCB though there are the marking of part No. on the PCB. Its means open circuited.

SCHEMATIC DIAGRAM MODEL : 2876DD / 2876DF (4/4)

U906 SECAM+1HDL BOARD
2876DD/DF PB7213X-1

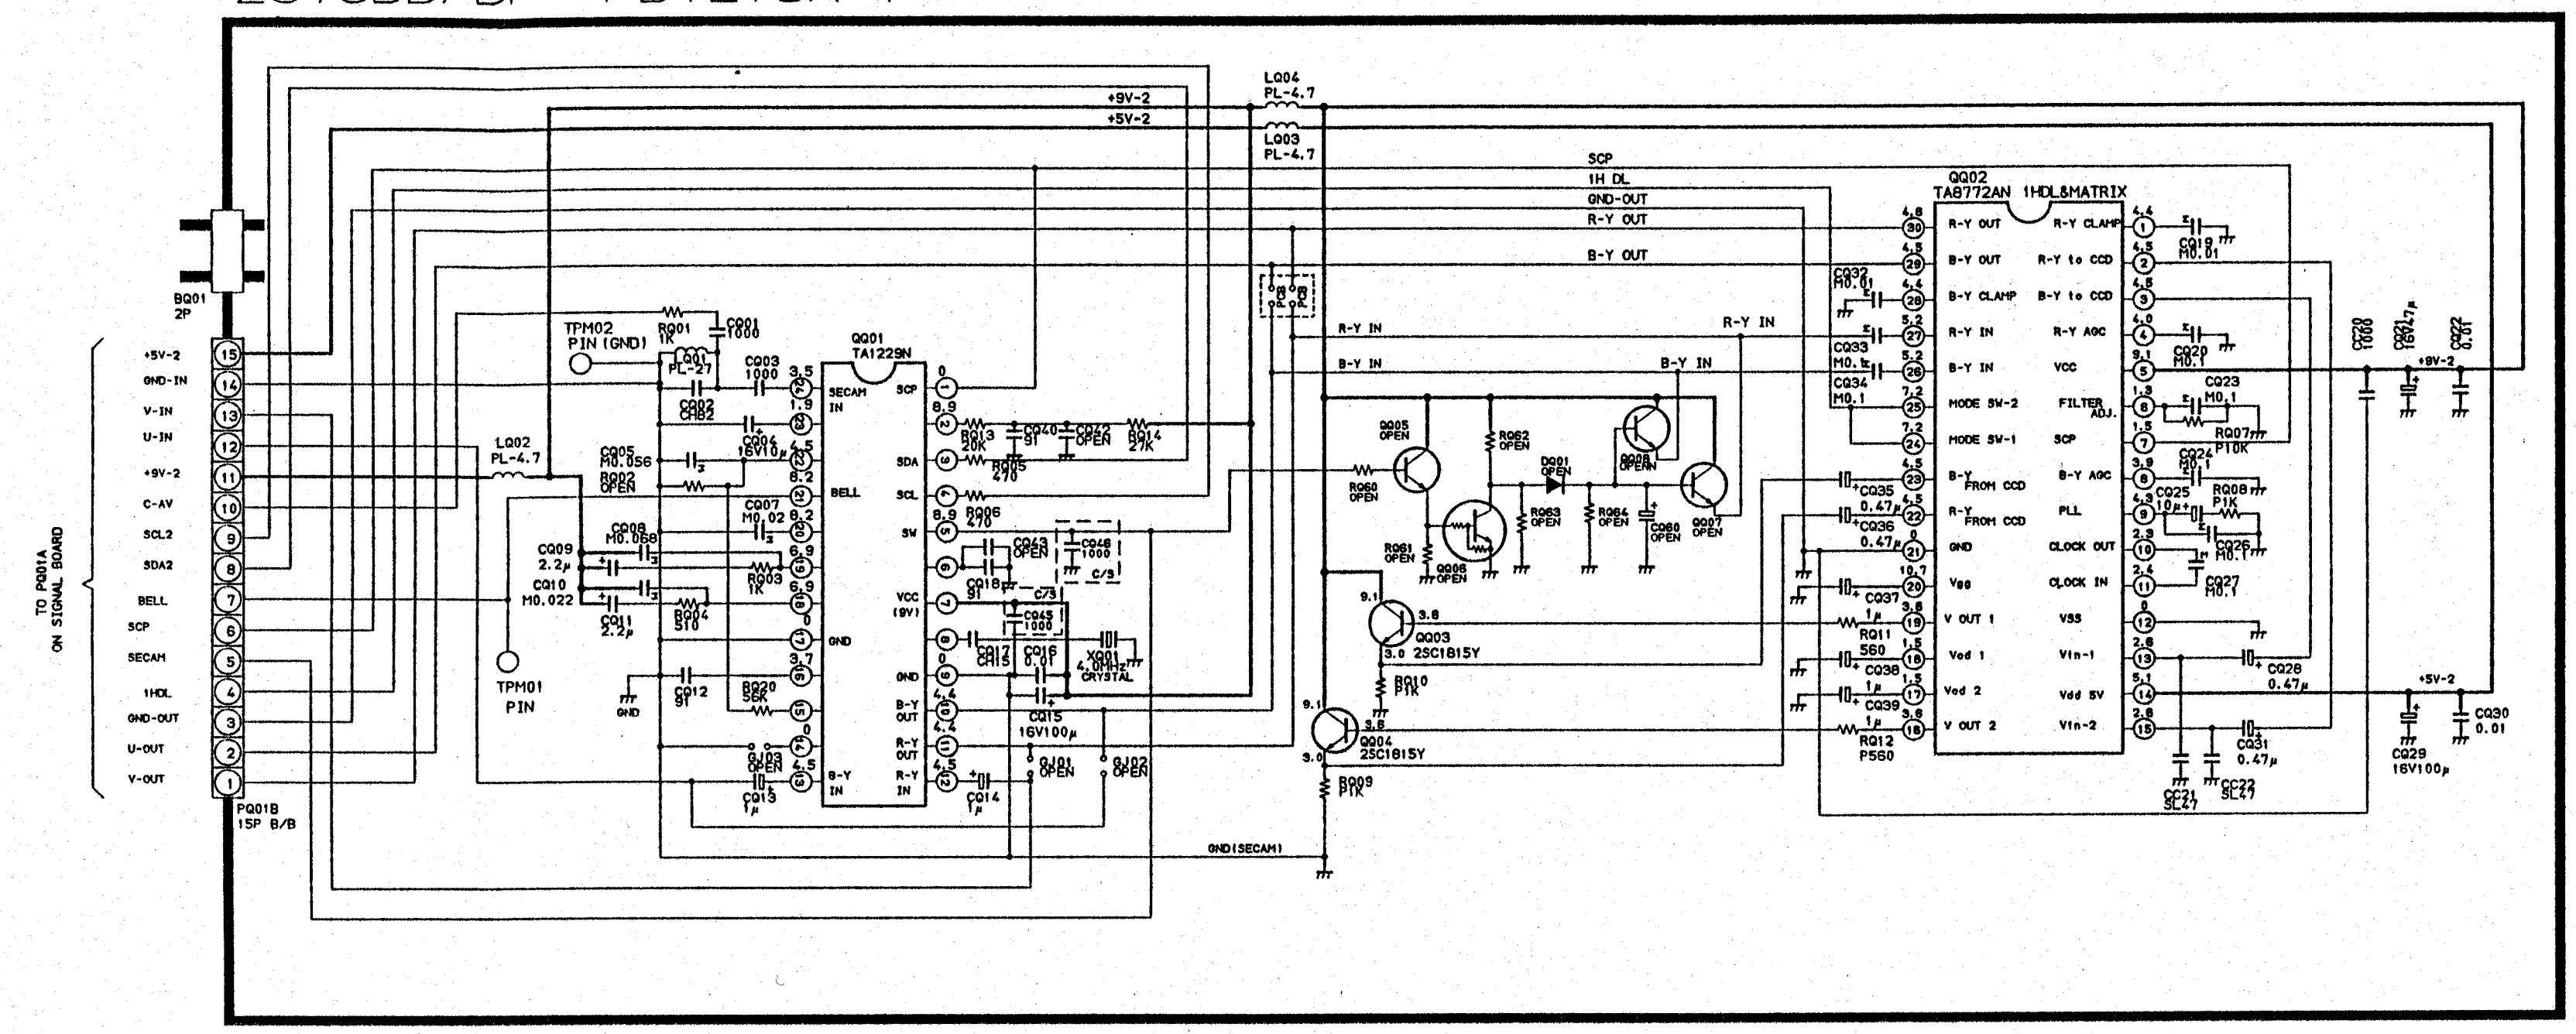

	2878DG	W/O SECAM
QQ05	DELETE	2SC1815Y
QQ06	DELETE	RN1203
QQ07	DELETE	2SC1815Y
QQ08	DELETE	2SC1815Y
DQ01	DELETE	1SS131
CQ60	DELETE	2.2μ
RQ60	DELETE	100
RQ61	DELETE	10K
RQ62	DELETE	10K
RQ63	DELETE	10K
RQ64	DELETE	100K

U902B PAL 100HZ BOARD
2876DD/DF PB7213K-4

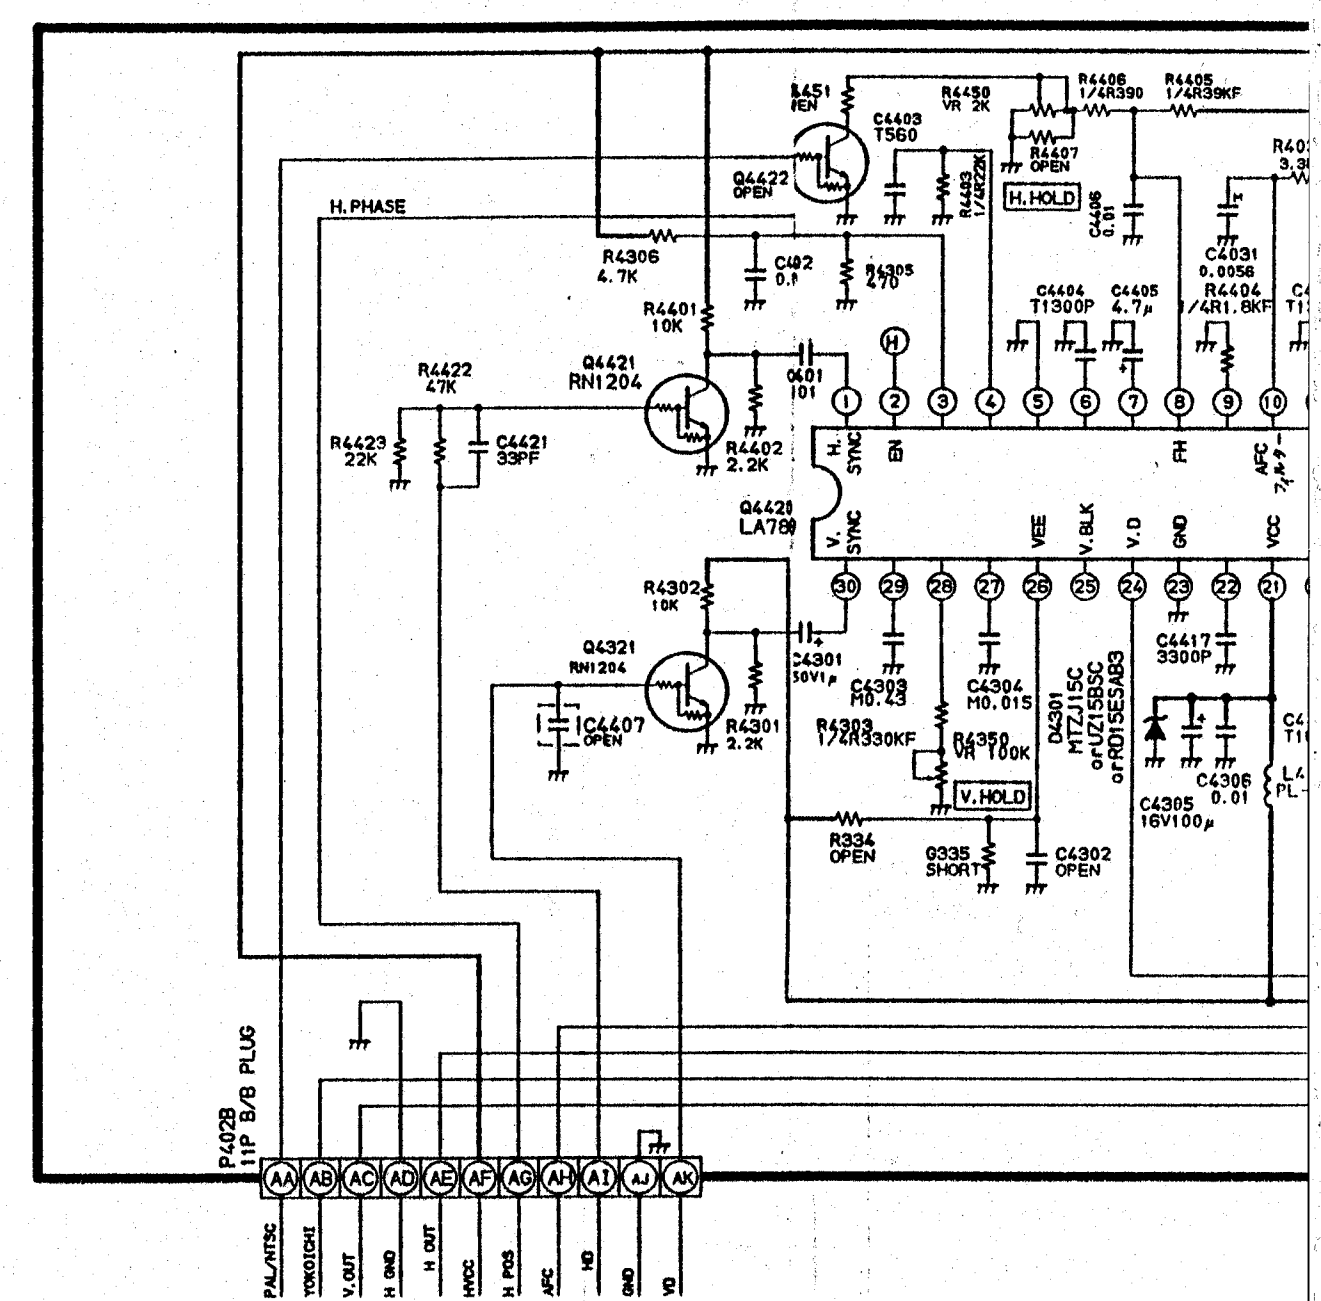

U902C YUV SW
2876DD/DF PB7

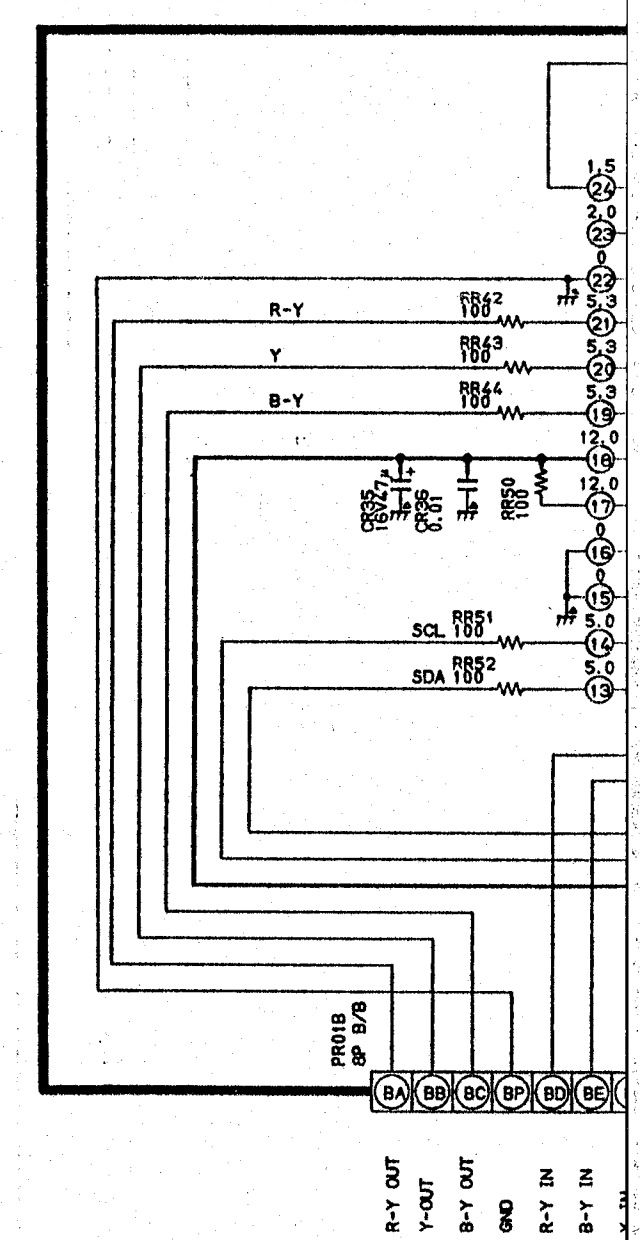

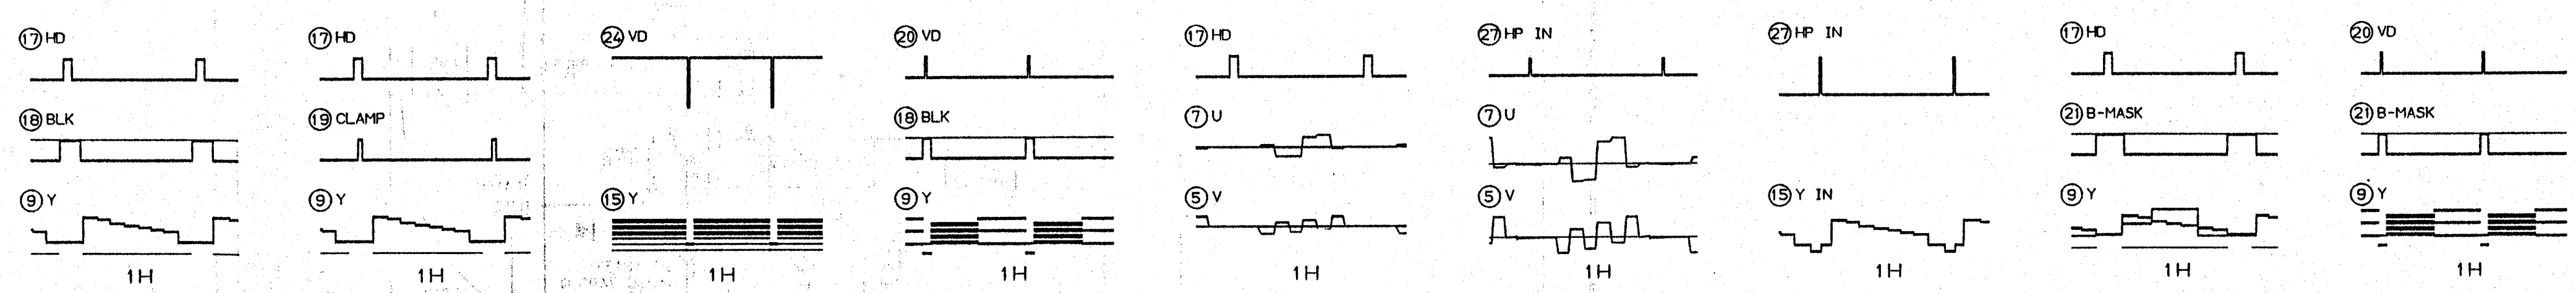

U908 UP CONVERTER BOARD
2876DD/DF PB7366X

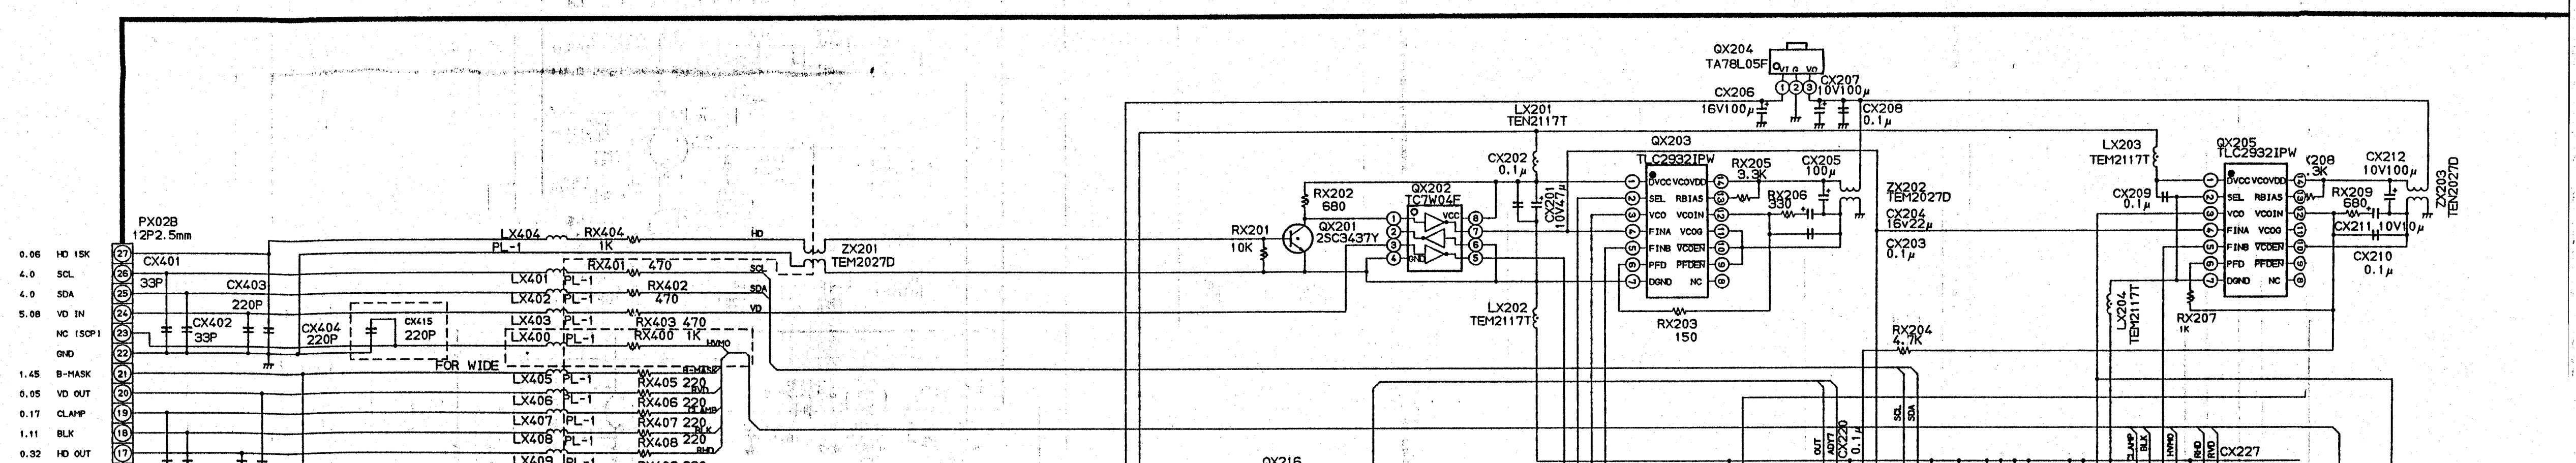

PX02B 12P2.5mm
0.06 HD 15K
4.0 SCL
4.0 SDA
5.08 VD IN
NC (SCP)
GND
1.45 B-MASK
0.05 VD OUT
0.17 CLAMP
1.11 BLK
0.32 HD OUT
FOR WIDE
QX201 2SC3437Y
QX202 TC7W04F
QX203 TLC2932IPW
QX204 TA78L05F
QX205 TLC2932IPW
ZX201 TEM2027D
ZX202 TEM2027D
ZX203 TEM2027D
LX201 TEN2117T
LX202 TEM2117T
LX203 TEM2117T
LX204 TEM2117T

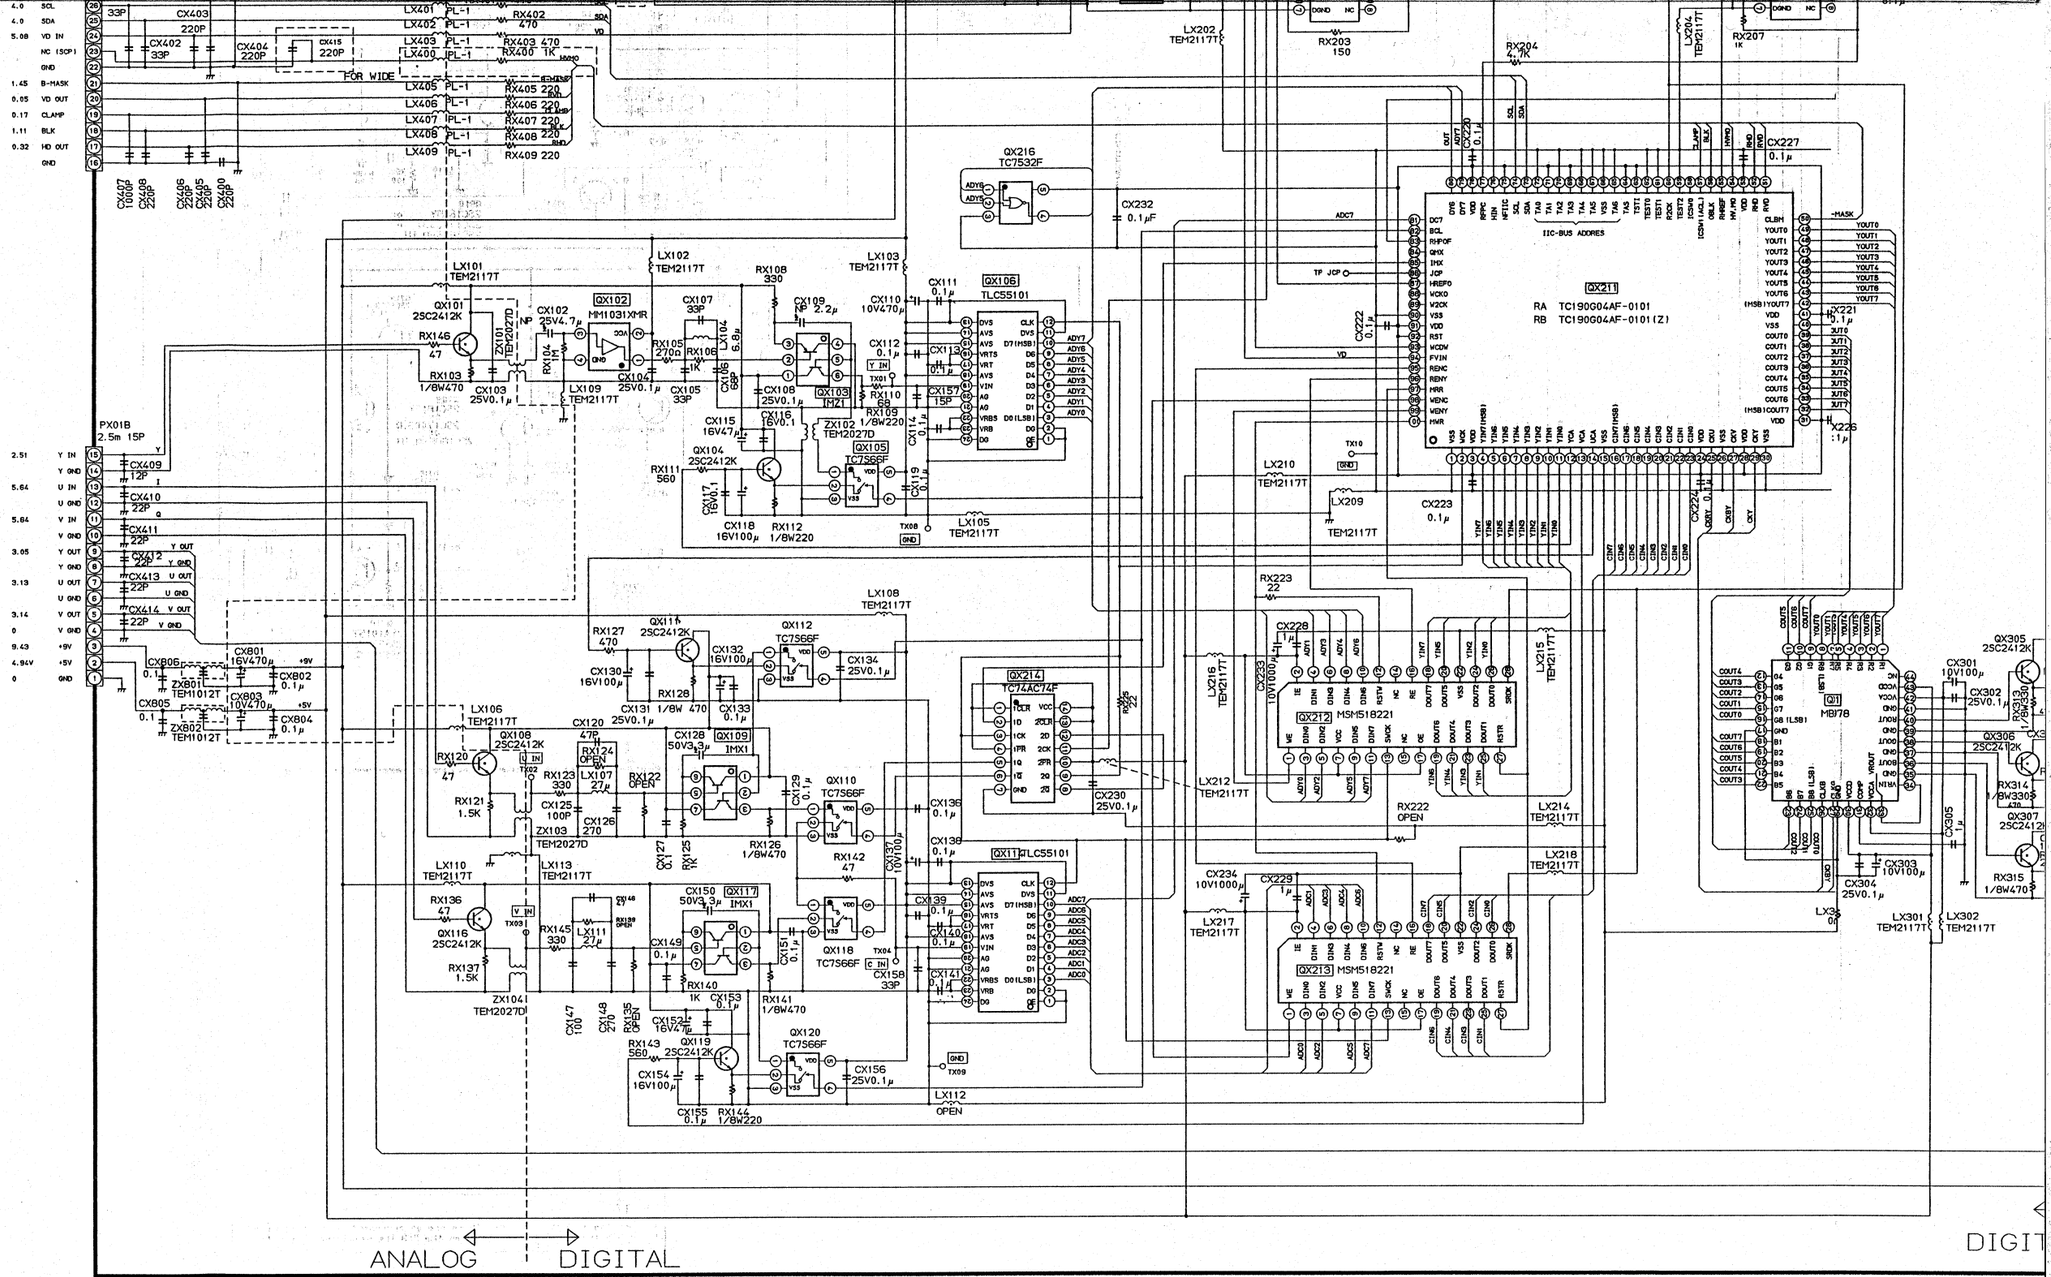
ANALOG
DIGITAL
DIGIT
FOR WIDE
IIC-BUS ADDRES
QX211
RA TC190G04AF-0101
RB TC190G04AF-0101(Z)
QX212 MSM518221
QX213 MSM518221
QX214 TC74AC74F
QX216 TC7532F
QX106 TLC55101
QX117 TLC55101
QX301 MB78
PX01B 2.5m 15P
TEM2117T
TEM2027D
TEM1012T
IMX1
TC7566F
MM1031XMR

100HZ BOARD
PB7213X-4

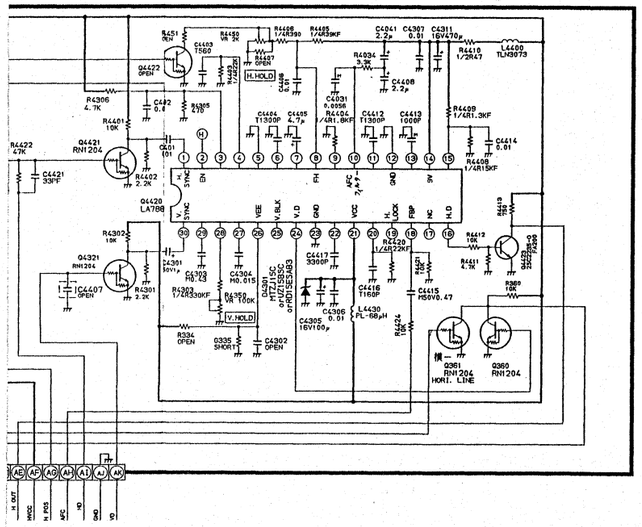

U906 COMB BOARD
2876DD/DF PB7213X-2

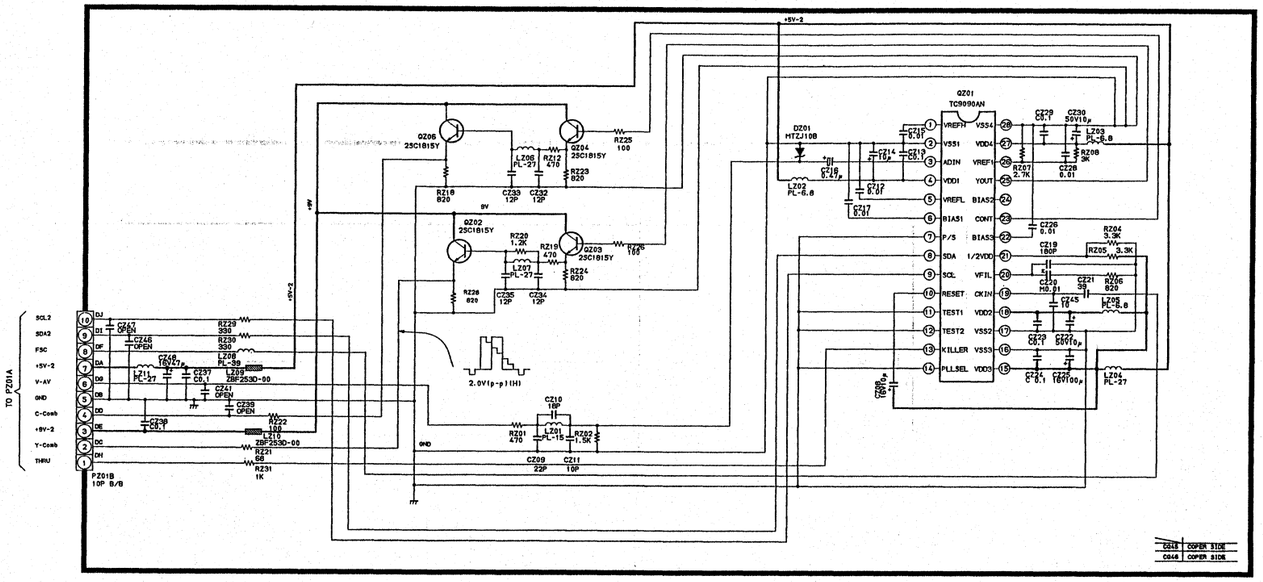

U902C YUV SW BOARD
2876DD/DF PB7213X-3

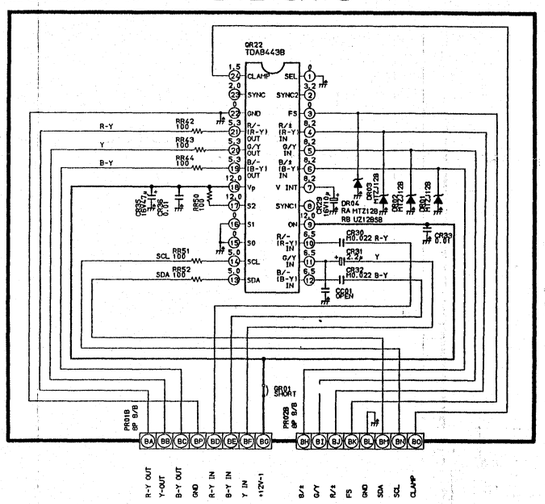

U902D A PRO/WOOFER BOARD
2876DD PB7208N-2 A-PRO
2876DF PB7208C-2 WOOFER

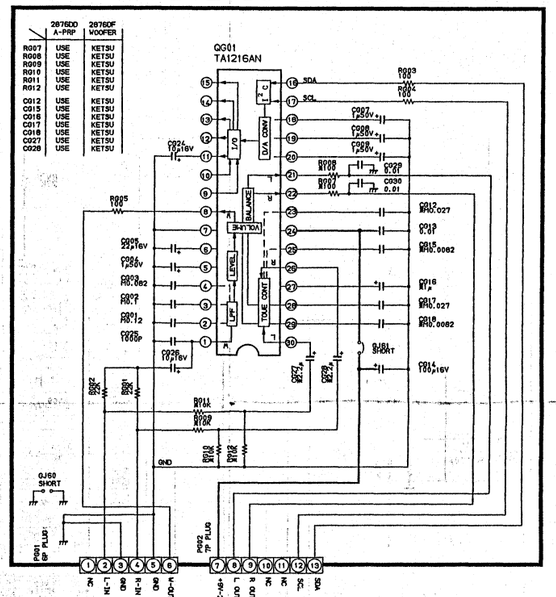

U907 TEXT BOARD
2876DD/DF PB6513X



U907 TEXT BOARD
2876DD/DF PB6513X

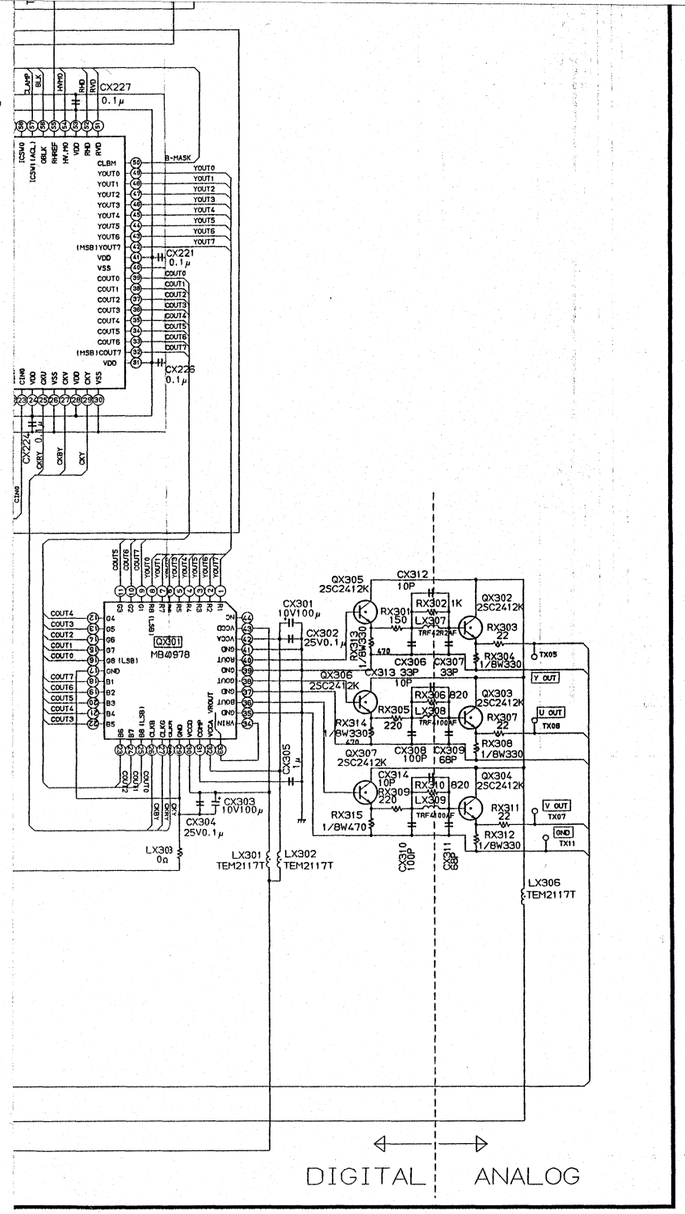

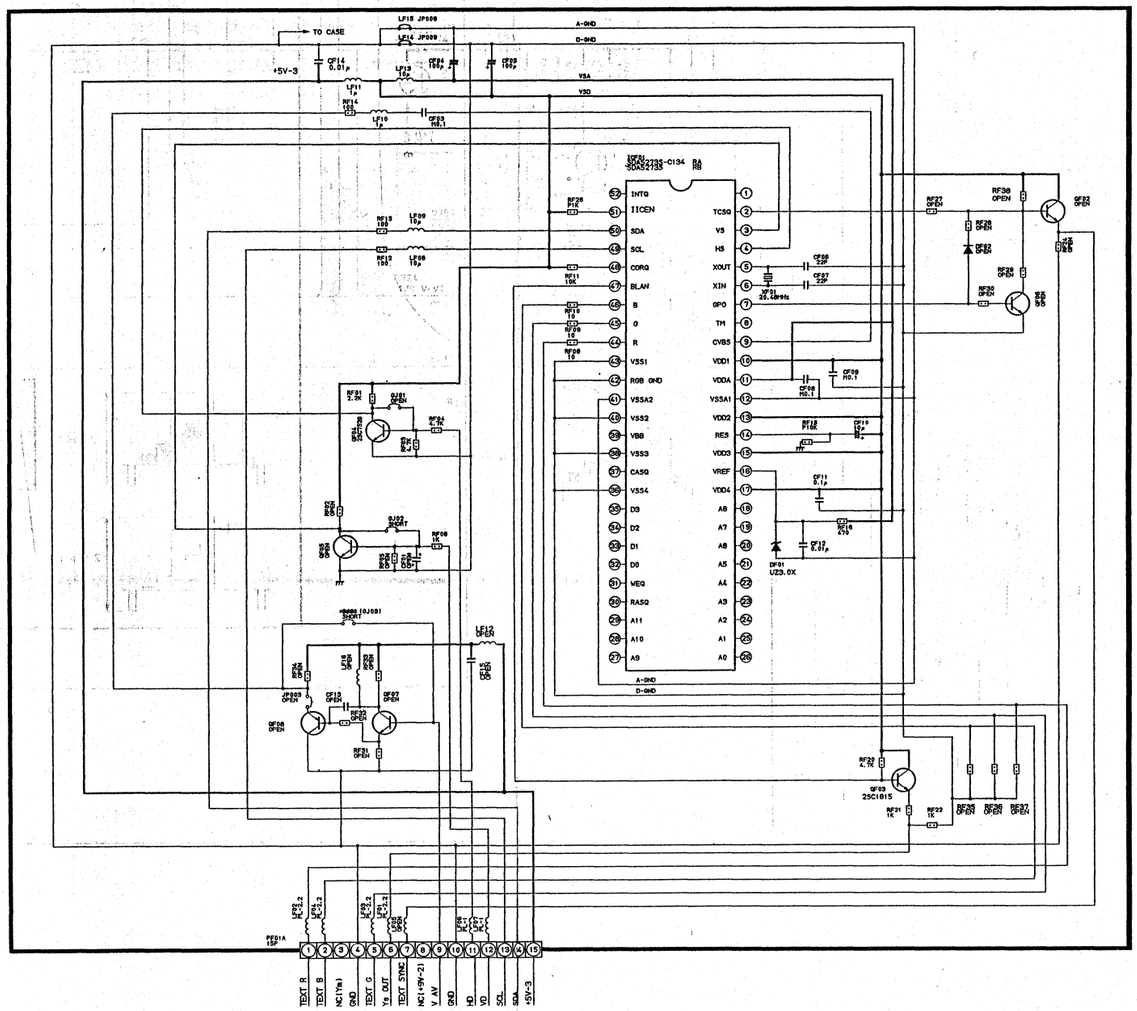

NOTE
The marking [OPEN] means that there are on component on the PCB though there are the marking of part No. on the PCB.Its means open circuited.

4/4

TOSHIBA

SERVICE MANUAL

COLOUR TELEVISION

C7SS Chassis

7076DD

– SUMMARY –

7076DD is the same as 2876DD.
Use this service manual together with the original service manual 2876DD (File No. 030-9704).

PRINTED IN JAPAN Nov., 1997 (So)